

## RANGE COMPOSITION

A range of wall-mounted hoods used for snack applications and on the N700 and N900 Series cooking units. Their particular profile and the limited installation height makes them suitable for use in places with low ceilings. The range consists of hoods with 8 different lengths (1200, 1600, 2000, 2400, 2800, 3200, 3600 and 4000 mm) and a depth of 700 mm.



# MASTER - MV line - 700 mm



## 304 AISI WALL TYPE HOODS **ZANUSSI** PROFESSIONAL

### FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 304 AISI stainless steel.
- ◆ Labyrinth filters in 304 AISI stainless steel easily removable for cleaning. Labyrinth filters guarantee constant filtration to avoid clogging and protect against fire.

- ◆ Powerful internal fan(s) 550 W.
- ◆ Back drain pipe with drain hole to transfer grease into a 304 AISI container.
- ◆ External panels with upturned edges to avoid injuries.
- ◆ Blind panels in 304 AISI stainless steel for a correct exhaustion.
- ◆ The outlet holes are sized in order to minimize drops in pressure.
- ◆ Pressure gauging for perfect calibration.
- ◆ Condensate collection tray in 304 AISI stainless steel.
- ◆ Eyebolts and screw anchors for ceiling installation.
- ◆ Prearranged for installation of lighting.

TECHNICAL DATA								
CHARACTERISTICS	MODELS							
	MPV712DT 642068	MPV716DT 642069	MPV720DT 642070	MPV724DT 642313	MPV728DT 642071	MPV732DT 642072	MPV736DT 642115	MPV740DT 642116
External dimensions - mm								
width	1200	1600	2000	2400	2800	3200	3600	4000
depth	700	700	700	700	700	700	700	700
height	500	500	500	500	500	500	500	500
Air Capacity - mc/h	3800	3800	3800	3800	7600	7600	7600	7600
Built-in fan - power W	550	550	550	550	550	550	550	550
Power - kW								
installed-electric	0.55	0.55	0.55	0.55	1.1	1.1	1.1	1.1
Net weight - kg.	28	35	42	49	63	72	77	72
Supply voltage	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60
<b>INCLUDED ACCESSORIES</b>								
304 S/S BLIND PANEL 400X500H MM	1	1	1	1			1	1
304 S/S LABYRINTH FILTER H=500 MM	2	2	4	4	5	6	6	7

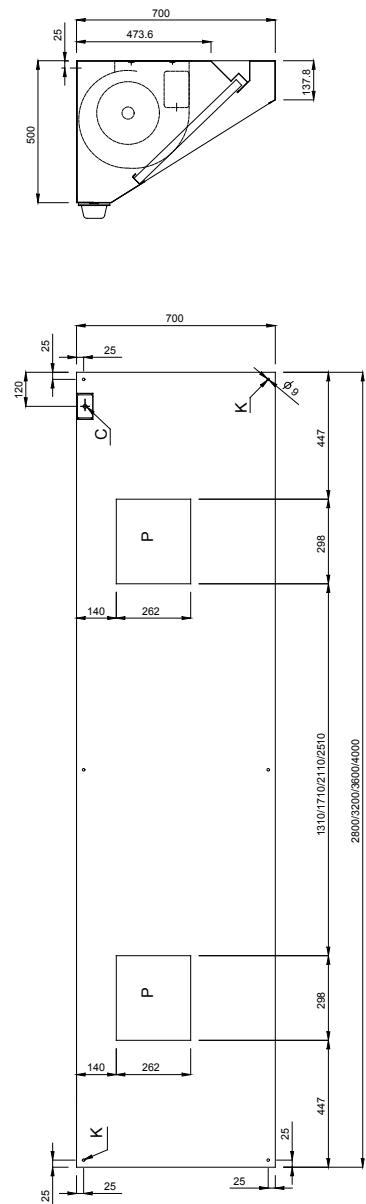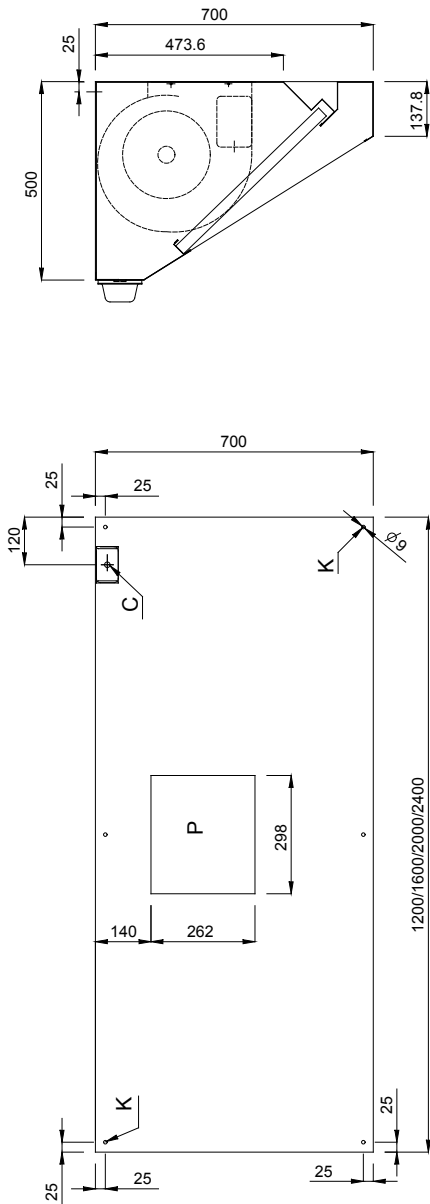

**LEGEND**

	MPV712DT 642068	MPV716DT 642069	MPV720DT 642070	MPV724DT 642313	MPV728DT 642071	MPV732DT 642072	MPV736DT 642115	MPV740DT 642116
I - Electrical connection	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60



**OPTIONAL ACCESSORIES**

ACCESSORIES	MODELS							
	MPV712DT 642068	MPV716DT 642069	MPV720DT 642070	MPV724DT 642313	MPV728DT 642071	MPV732DT 642072	MPV736DT 642115	MPV740DT 642116
27-WATT LIGHTING FIXTURE W/1 LAMP-IP 65	680804		680804	680804		680804	680804	680804
36-WATT LIGHTING FIXTURE W/1 LAMP-IP 65		680805			680805	680805	680805	680805
DRAIN FOR HOODS DIAM. 1/2"(M) WITH PLUG	640409	640409	640409	640409	640409	640409	640409	640409
SPEED VARIATOR FOR MOTORS UP TO 1.17 KW	640076	640076	640076	640076				
SPEED VARIATOR FOR MOTORS UP TO 1.7 KW					640686	640686	640686	640686



www.zanussiprofessional.com