

RANGE COMPOSITION

A range of hoods used on dishwashers and pot & pan washers. The frontal extraction with vacuum immediately traps the steam. The condensation formed on the baffle surface is conveyed through the outer ducting to the discharge. The range consists of hoods with 8 different lengths (1200, 1600, 2000, 2400, 2800, 3200, 3600, 4000 mm) and 1200 mm deep.



643321

VAPOR - V line - 1200 mm





304 AISI WALL TYPE HOODS FOR DW **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 304 AISI stainless steel.
- ◆ Large perimetral gutter to collect steam condensation.

- ◆ External panels with upturned edges to avoid injuries.
- ◆ The outlet holes are sized in order to minimize drops in pressure.
- ◆ Pressure gauging for perfect calibration.
- ◆ Internal baffle to facilitate collection and steam condensation.
- ◆ Eyebolts and screw anchors for ceiling installation.

TECHNICAL DATA								
CHARACTERISTICS	MODELS							
	DK1212 643320	DK1216 643321	DK1220 643322	DK1224 643323	DK1228 643324	DK1232 643325	DK1236 643326	DK1240 643327
External dimensions - mm								
width	1200	1600	2000	2400	2800	3200	3600	4000
depth	1200	1200	1200	1200	1200	1200	1200	1200
height	400	400	400	400	400	400	400	400
Air Capacity - mc/h	1600	2200	2700	3200	3700	4300	4800	5300
Net weight - kg.	38	47	55	64	72	81	89	98

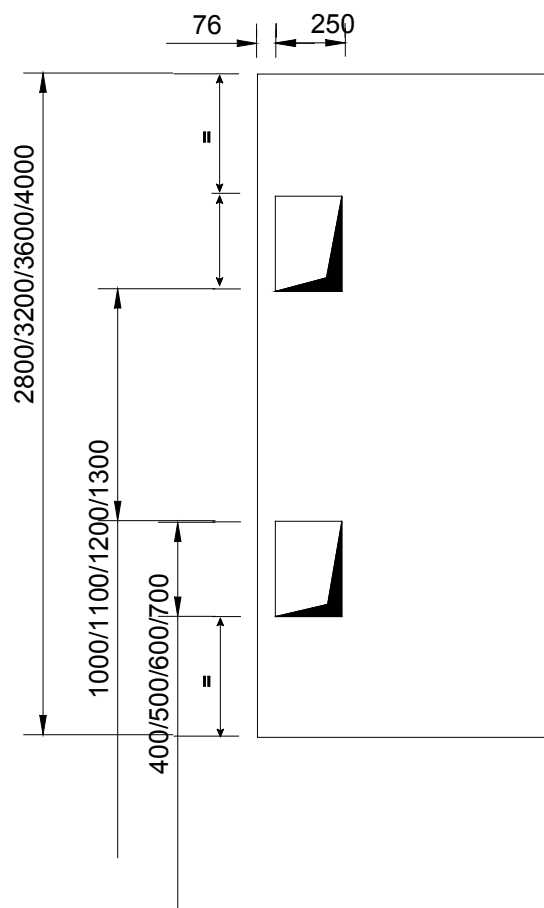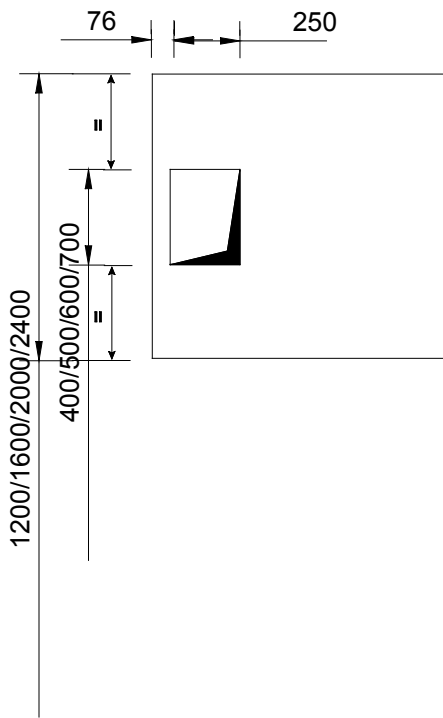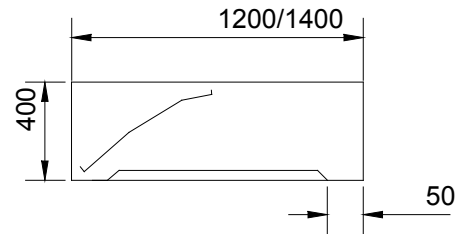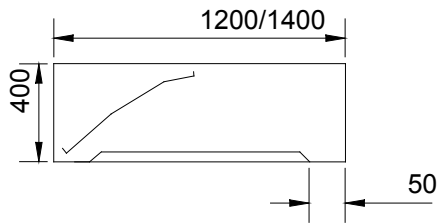

www.zanussiprofessional.com

OPTIONAL ACCESSORIES								
ACCESSORIES	MODELS							
	DK1212 643320	DK1216 643321	DK1220 643322	DK1224 643323	DK1228 643324	DK1232 643325	DK1236 643326	DK1240 643327
36-WATT LIGHTING FIXTURE W/1 LAMP-IP 65		680805			680805	680805	680805	680805
EXTRACTION PLENUM FOR HOOD 2800 MM					640265			
EXTRACTION PLENUM FOR HOOD 3200 MM						640266		
EXTRACTION PLENUM FOR HOOD 3600 MM							640267	
EXTRACTION PLENUM FOR HOOD 4000 MM								640268