



SPECIFICATIONS
PROFESSIONAL
RANGE HOODS

Professional Series 10" Height Wall Mounted Range Hood

- Hood Dimensions**

Overall bottom projection - 24"
Available height (less Soffit) - 10"
Available widths: 30" and 36"

- Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

- Lighting**

2 - PAR16 Medium screw base, 45 watt maximum
Halogen lamps (not included).

- Heat Lamps** (model P1036W)


2 - 175 watt maximum Type PAR38 heat lamps (not included).

- Ducting Options**


Vertical or Horizontal ducting through ducting transition (not included)
specified for size of motor.

- Filters**

Grease Baffles: Dishwasher safe, Stainless Steel baffles (included).

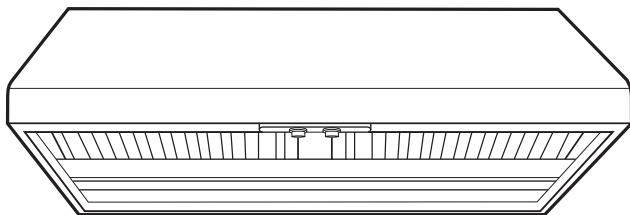

P10 SERIES

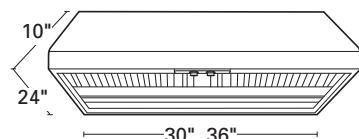

Model	Description	Width	Height
P1030	Range Hood	30"	10"
P1036	Range Hood	36"	10"
P1036W	Range Hood w/Heat Lamps	36"	10"

Motor Size	POWER USAGE					
	30"		36"		36" w/Heat Lamps	
Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	
300 CFM	1.7 amps	15 amp	1.7 amps	15 amp	5.9 amps	15 amp
500 CFM	1.9 amps	15 amp	1.9 amps	15 amp	6.1 amps	15 amp
600 CFM	2.1 amps	15 amp	2.1 amps	15 amp	6.3 amps	15 amp
900 CFM	6.5 amps	15 amp	6.5 amps	15 amp	10.7 amps	15 amp
1200 CFM	8.0 amps	15 amp	8.0 amps	15 amp	12.2 amps	20 amp

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable codes and standards.

PROJECT		ARCHITECT							
LOCATION		ENGINEER							
CONTRACTOR		SUBMITTED BY	DATE						
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015