
# INSTALLATION MANUAL **4X12 PERGOLA ROOM KIT**



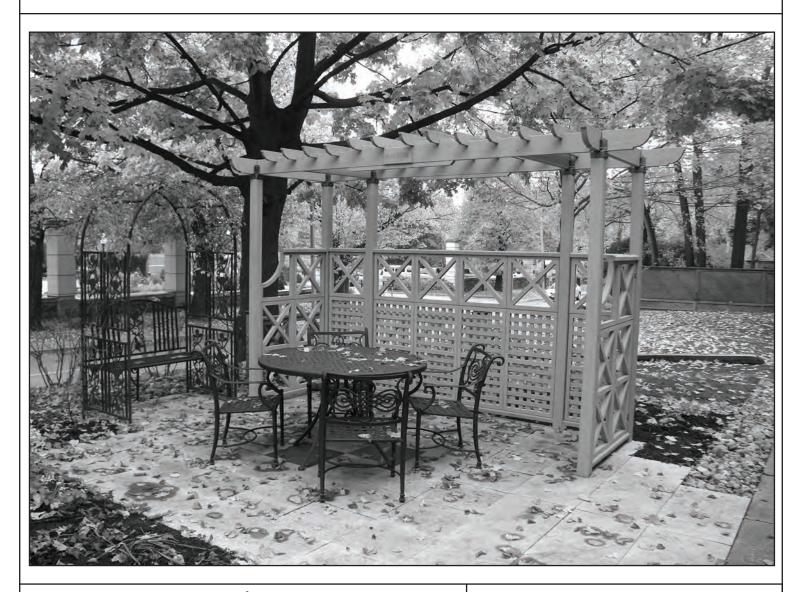


#### **Yardistry - North America**

Toll Free Customer Support: 1.888.509.4382 info@yardistrystructures.com www.yardistrystructures.com

#### Yardistry / Selwood Products - Europe

Customer Support: +44 1284 852569 parts@selwoodproducts.com www.selwoodproducts.com

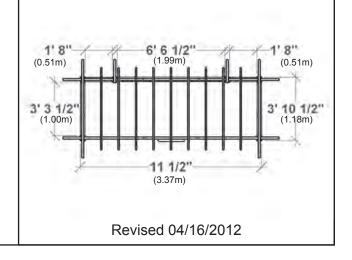

### !IMPORTANT SAFETY NOTICE!

- Yardistry components are intended for privacy, decorative and ornamental use only. Product is NOT **INTENDED** for the following:
  - A safety barrier to prevent unsupervised access to pools, hot tubs, spas, or ponds.
  - Safety railings for elevated platforms or decks.
  - As load bearing support for a building, structure, heavy objects or swings. Used in structures that trap wind, rain or snow that would create extra load on the product.
- Permanent structures may require a building permit. As the purchaser and or installer of this product you are advised to consult local planning, zoning, and building inspection departments for guidance on applicable building codes and or zoning requirements.
- Wood is NOT flame retardant and will burn. Grills, fire pits and chimneys are a fire hazard if placed too close to a Yardistry structure. Consult user's manual of the grill, fire pit or chimney for safe distances from combustible materials.
- During installation, follow all safety warnings provided with your tools and use OHSA approved safety glasses.
- Some structures may require two or more people to install safely. Check for underground utilities before digging or driving stakes into the ground!

General Information: Wood components are manufactured with Cedar (C. Lanceolata) which is protected with factory applied water-based stain. Knots, small checks (cracks) and weathering are naturally occurring and do not affect the strength of the product. Annual application of a water-based water repellent sealant or stain will help reduce weathering and checks.

Warranty: Yardistry Limited products are backed by a 5 year limited lifetime warranty from the date of original retail purchase for manufacturing defects and if installed as per manufacturer's installation instructions.

#### Patents Pending

#### **Tools Required**

- Tape Measure
- Carpenters Level
- Carpenters Square
- Standard or Cordless Drill
- #2 Phillips or Robertson Bits or Screwdriver
- Ratchet with extension (7/16" sockets)
- Open End Wrench (7/16")
- Adjustable Wrench
- 1/8" Drill Bit
- Pencil
- 1/4" Drill Bit
- 3/16" Hex Key

- 8' Step Ladder
- Safety Glasses
- Adult Helpers

#### **Keys To Assemble Success**

This identifies information that requires special attention. Improper assembly could lead to an unsafe or dangerous condition.



Square

Help


Use

Where this is shown, 2 or 3 people are required to safely complete the step. To avoid injury or damage to the assembly make sure to get help!

Measure Distance

Use

Help




Check that assembly is square before tightening bolts.

Use a measuring tape to assure proper location.

Check that set or assembly is properly level before proceeding.

Pre-drill 1/8" & 3/16" Bit




Pre-drill a pilot hole before fastening screw or lag to prevent splitting of wood.




Use


Tiahten Bolts

This indicates time to tighten bolts, but not too tight! Do not crush the wood. This may create splinters and cause structural damage.

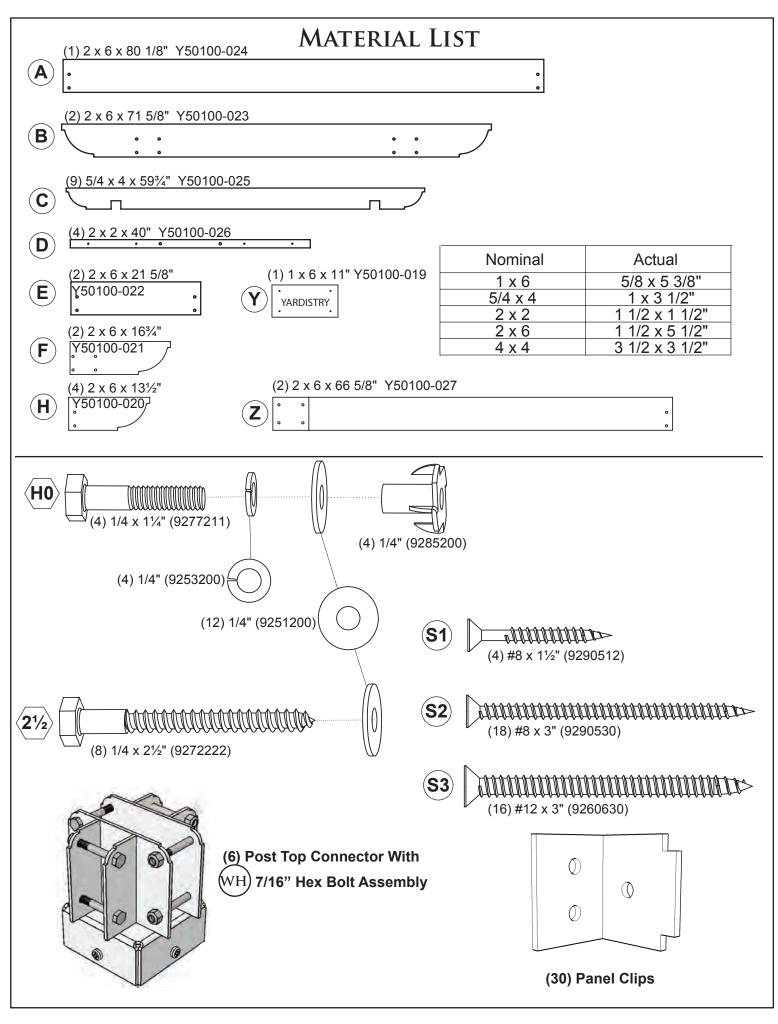

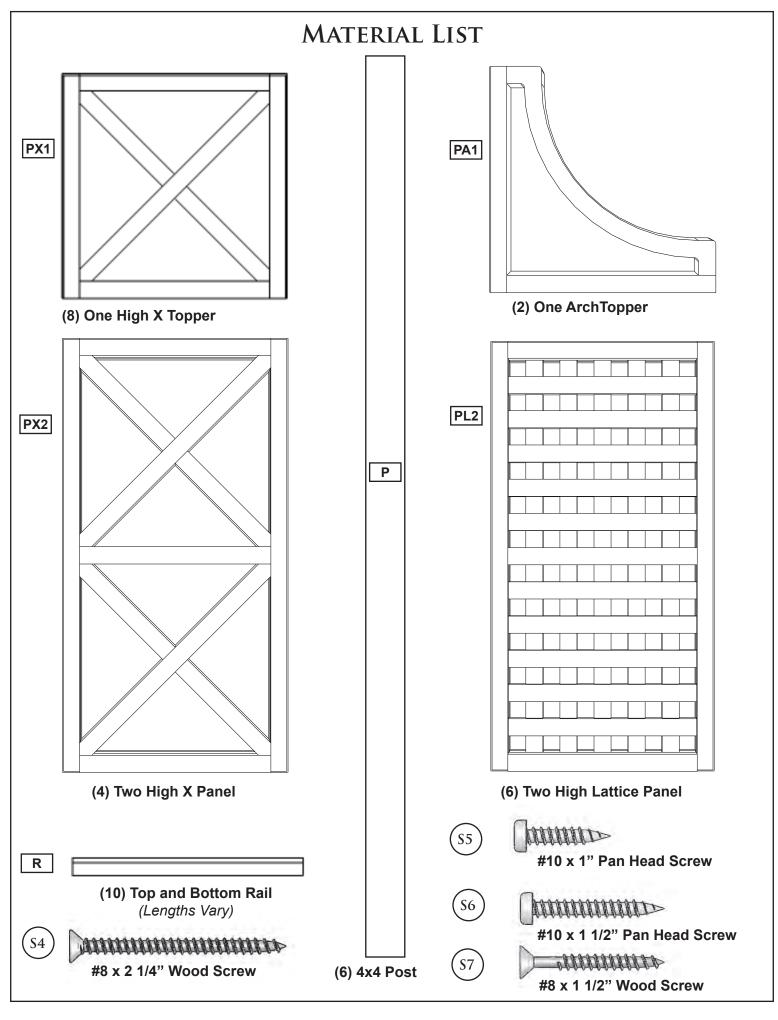

### STEP 1- ASSEMBLE SCREENS FOR MAIN WALL

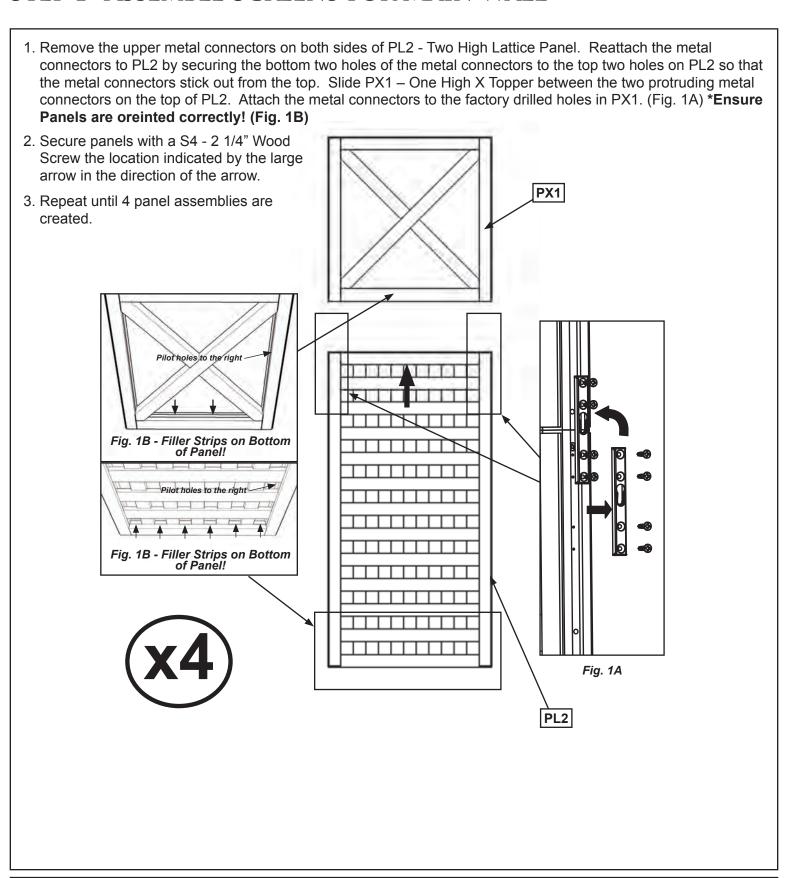


4X PXI ONE HIGH X TOPPER

4X (s4) #8- 2 1/4" WOOD SCREWS


4X PL2 TWO HIGH LATTICE PANEL

## STEP 2- ASSEMBLE MAIN WALL



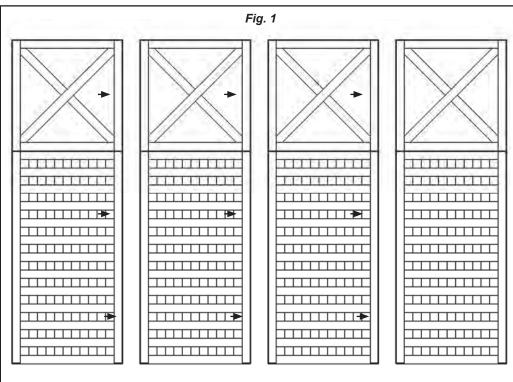

- Assemble panels together in configuration shown. (Fig.1) Insert male connector into female. Slide down until flush with adjacent panel as shown. (Fig. 1A)
- 2. Secure Panels with S4 2 1/4" screws provided in pre-drilled holes as indicated by arrows, in the direction of the arrow. (Fig.1)



- 3. Secure R-Top and
  Bottom Rails to Panel
  Assembly with S4 2 1/4"
  Wood Screws locations
  indicated by arrows in
  the direction of the arrow.
  (Fig. 2)
- \*R- Top and Bottom Rails will overhang 1/4" on either side of panel.
- \* R- Top and Bottom Rails may need to be cut to 6' 6 1/2" (2m)

(It is recommended to use a Mitre Box or Mitre Saw)


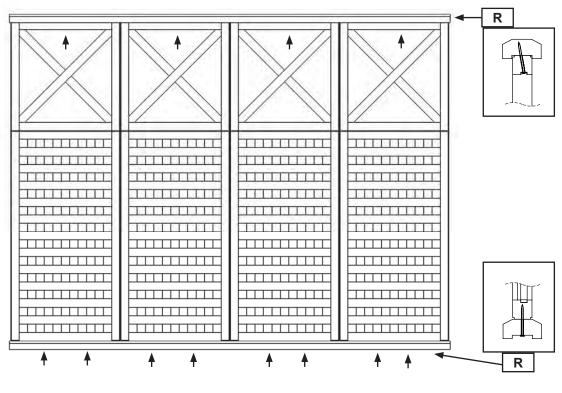


Fig. 2

2X R TOP & BOTTOM RAIL AT 6' 6 1/2" (2M)

21x(s4)#8- 2 1/4" WOOD SCREWS


## STEP 3- ASSEMBLE SINGLE SCREENS

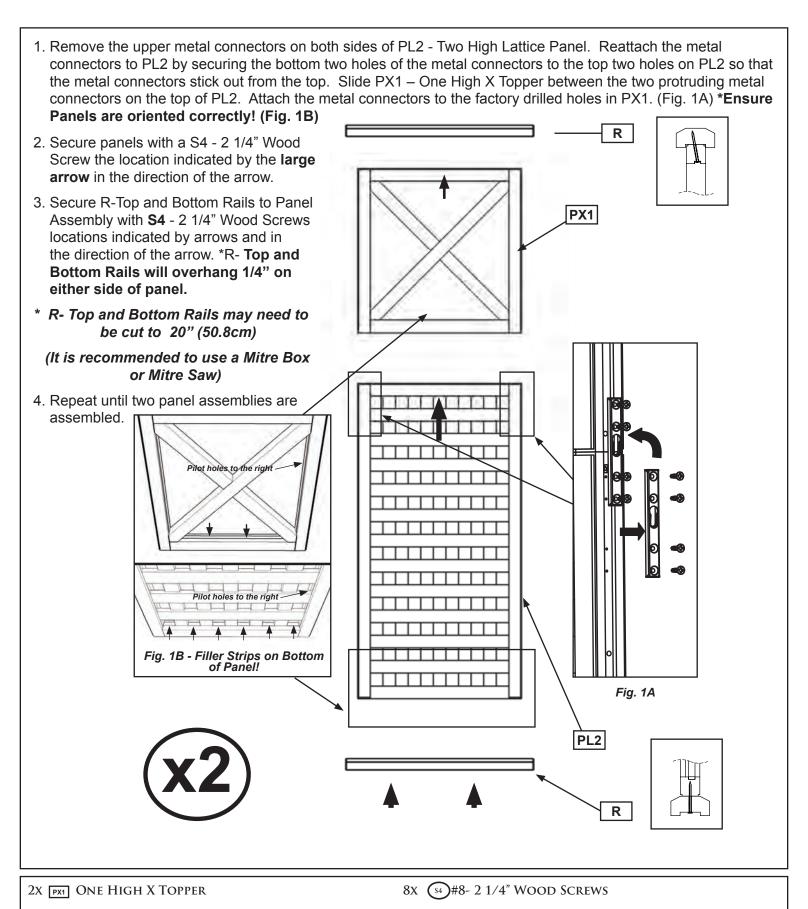



2X PL2 TWO HIGH LATTICE PANEL

4X R TOP & BOTTOM RAIL AT 20" (50.8CM)

### STEP 4A- ASSEMBLE WINGS






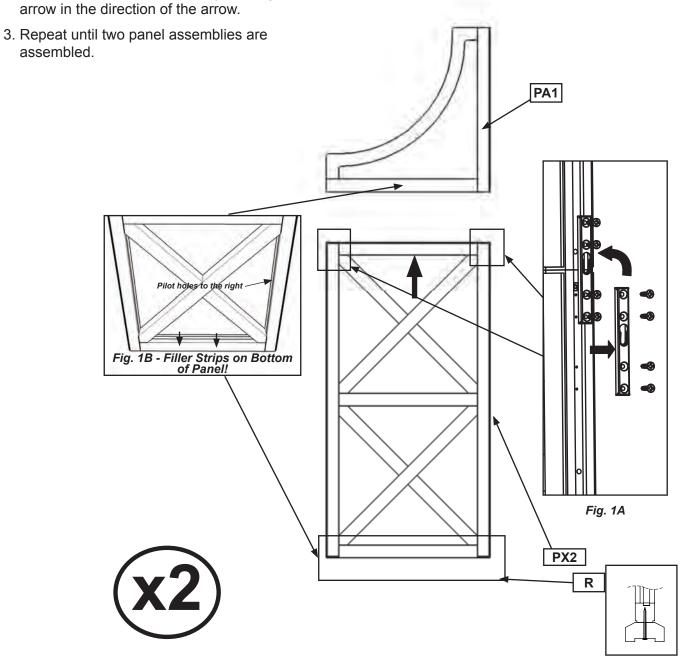



2X PXI ONE ARCH TOPPER

2X PX2 TWO HIGH X PANEL

### STEP 4B- ASSEMBLE WINGS CONTINUED





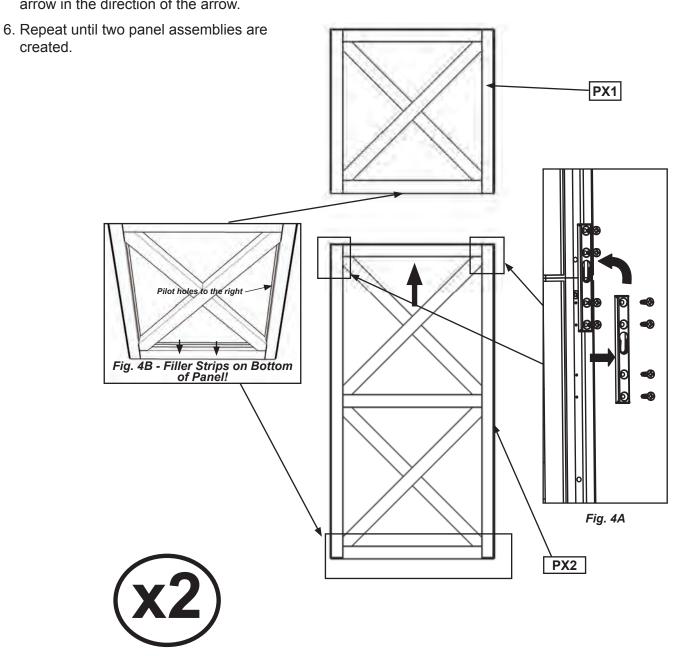


2X PA1 ONE HIGH X TOPPER

2X 48- 2 1/4" WOOD SCREWS


2X PX2 TWO HIGH X PANEL


## STEP 5- ASSEMBLE SIDE WALL



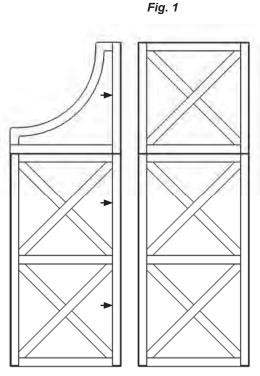

- 1. Assemble panels together in configuration shown. (Fig.1) Insert male connector into female. Slide down until flush with adjacent panel as shown. (Fig. 1A)
- 2. Secure Panels with S4 2 1/4" screws provided in pre-drilled holes as indicated by arrows, in the direction of the arrow. (Fig.1) Pre-Drill holes with a 1/8th drill bit as required.






- 3. Secure R-Top and Bottom Rails to Panel Assembly with S4 - 2 1/4" Wood Screws locations indicated by arrows in the direction of the arrow. (Fig. 2)
- \*R- Top and Bottom Rails will overhang 1/4" on either side of panel. \*Except with Arch Topper!
- \* R- Top and Bottom Rails may need to be cut to size indicated in material list below.

(It is recommended to use a Mitre Box or Mitre Saw)

4. Repeat to create two walls.

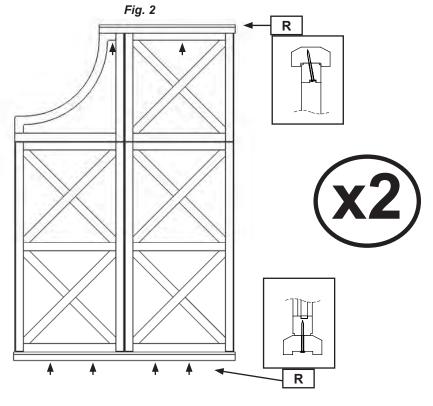

2X R TOP & BOTTOM RAIL AT 3' 3 1/2" (1M)

18X (54) #8- 2 1/4" WOOD SCREWS


2X R TOP & BOTTOM RAIL AT 2' 2 3/4" (67.9CM)


# STEP 6- ATTACH PANEL CLIPS TO BACK POSTS





- 1. On a flat surface place P- 4x4 Post on its side and position Panel Clips in locations indicated in Figures 1 and 1A. **Ensure Panel Clips are oriented as shown in Diagrams!**
- 2. Panel Clips should be placed in the centre of the post or the leading edge of the clip should be 1 3/8" or 3.5cm away from the side of the post as shown in Fig. 2.
- 3. With Panel Clips in place, mark screw holes with a pencil and pre-drill holes with a 1/8" drill bit. (Not provided)
- 4. Secure Panel Clips in locations indicated in figure 1 and 1A with S7- #8 x 1 1/2" wood screws.



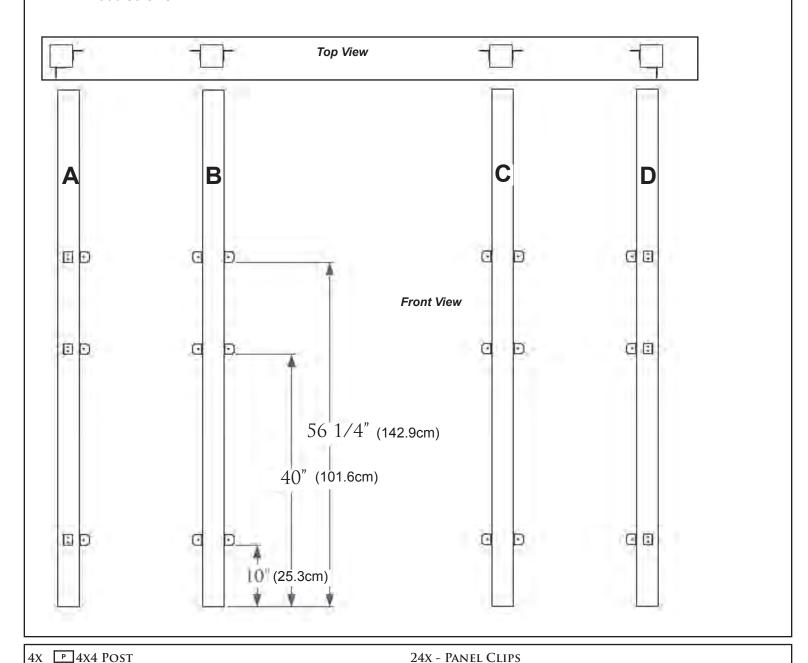


48x (57) #8 x 1 1/2" WOOD SCREW


# STEP 7- ATTACH PANEL CLIPS TO SIDE POSTS





- 1. On a flat surface place P- 4x4 Post on its side and position Panel Clips in locations indicated in Figures 1 and 1A. Ensure Panel Clips are oriented as shown in Diagrams! Use posts A and D from previous step.
- 2. Panel Clips should be placed in the centre of the post or the leading edge of the clip should be 1 3/8" or 3.5cm away from the side of the post as shown in Fig. 2.
- 3. With Panel Clips in place, mark screw holes with a pencil and pre-drill holes with a 1/8" drill bit. (Not provided)
- 4. Secure Panel Clips in locations indicated in figure 1 and 1A with S7- #8 x 1 1/2" wood screws.
- 5. Repeat for each post configuration.



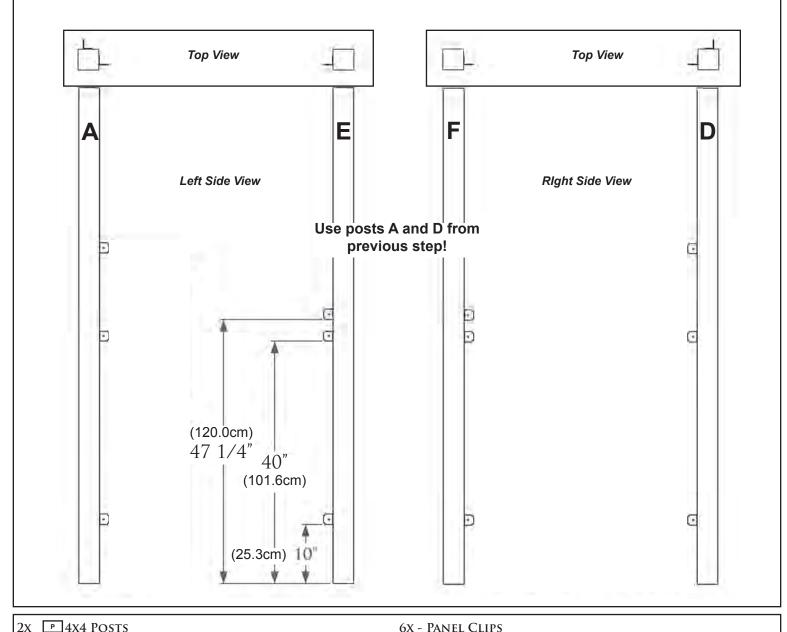

12x (57) #8 x 1 1/2" WOOD SCREW

# STEP 9- ATTACH PANELS TO POSTS











- 1. Place panel assemblies on posts as shown (Fig.1) allowing a 4" gap between the bottom of the post and the bottom edge of the bottom rail on the panel assembly. *Note: Assemble with the help of another adult!*
- 2. With a 1/8" drill bit, predrill holes as shown in figure 2.
- 3. Fasten the panel assembles to the post and Panel Clips with a S5- 1" Pan Head Screw provided in location of circles. (Fig. 1)

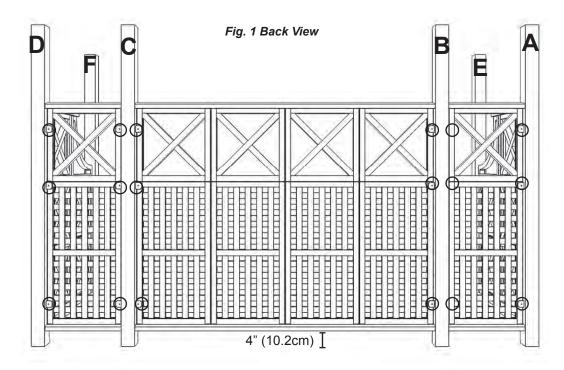








Fig. 2. Predrill Holes and Fasten with S5- 1" Pan Head Screw



30x(s5)#10 x 1" PAN SCREWS

# STEP 10- LAYOUT POSTS AND CONNECTORS

- 1. Layout pergola bases in configuration shown in figure 1. \*Posts must be securely installed to support structure.Consult local building codes and ground conditions for required footing design. It is recommended the structure be secured to existing stone, concrete or deck with the Yardistry Post Base (YM21016) or equivalent hardware.
- 2. Install Post Top Connectors with S6- 1 1/2" Pan Head Screws provided. (Fig. 2) Ensure the direction of the Post Top Connector is the same direction as indicated by the arrows in figure 1.

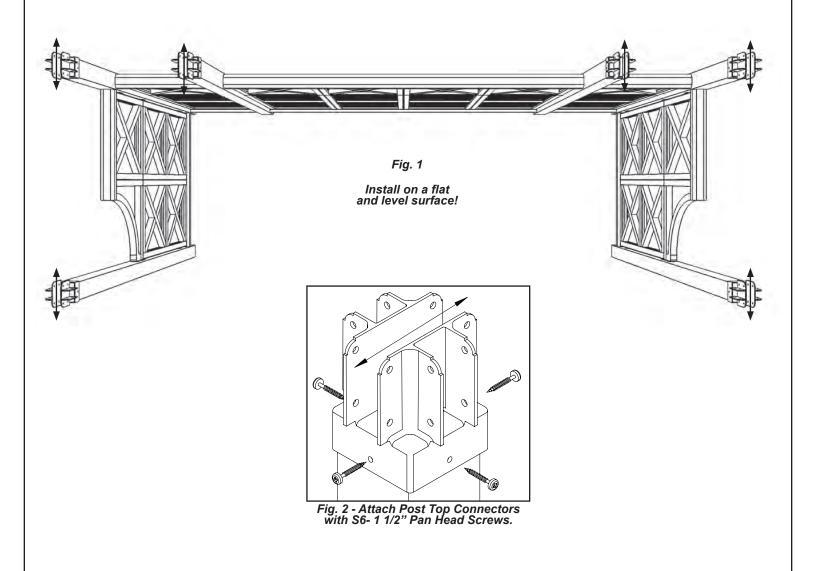


24x s<sub>6</sub>)1 1/2" Pan head Screws

6X - POST TOP CONNECTOR

## STEP 11- ASSEMBLE FRONT AND BACK BEAMS



- 1. Secure two Z-2 x 6 x 66 5/8" Beams together with H0-1/4" x 1 1/4" Hex Bolts as shown in Figure 1.
- 2. Attach Y-1 x 6 x 11" Plaque with S1-#8 1 1/2" Wood Screws as shown in Fig. 1.
- 3. Complete Z- Front Beam by securing two Z-2 x 6 x 66 5/8" Beams and two D-2 x 2 x 40" Brace with 1/4 x 2½" Hex Lag Bolt and S3- #12 x 3" Wood Screws as shown in Figure 1. **Note: Hex Lag Bolt assembly in diagram below.**

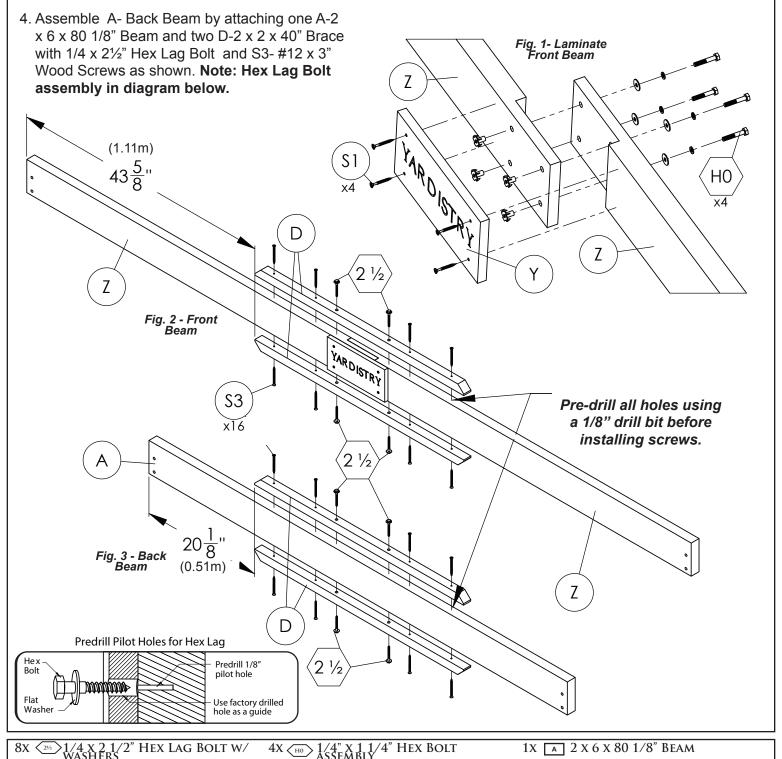

2X Z 2 X 6 X 66 5/8" BEAM

16x (s3)#12- 3" WOOD SCREW


4x (s1) #8- 1 1/2" WOOD SCREW

4X D 2 X 2 X 40" BRACE


1X Y 1 X 6 X 11" PLAQUE

## STEP 12- MOUNTING BEAMS TO CONNECTORS



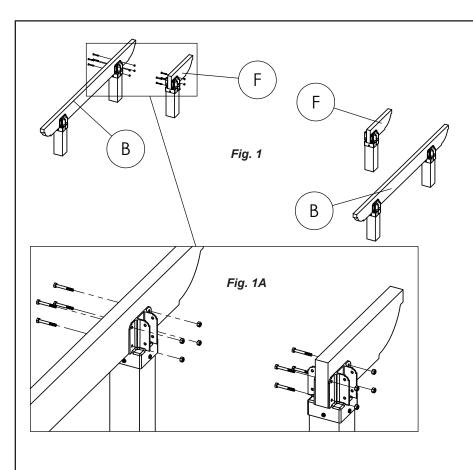

- 1. Attach two B- 2 x 6 x 71 5/8" Beams to Post Top Connectors with WH-7/16" Hex Bolt as shown in Fig. 1 and 1A.
- 2. Attach two F- 2 x 6 x 16 3/4" Beams Ends to Post Top Connectors with WH-7/16" Hex Bolt as shown in Fig. 1 and 1A.
- Attach one A- Back Beam and one Z-Front Beam to Post Top Connectors with WH-7/16" Hex Bolt as shown in Fig. 2 and 2A.
- 4. Attach four H- 2 x 6 x 13 1/2" Beam Ends to Post Top Connectors with WH-7/16" Hex Bolt as shown in Fig. 2 and 2A.
- 5. Attach two E- 2 x 6 x 21 5/8" Beams to Post Top Connectors with WH-7/16" Hex Bolt as shown in Fig. 2 and 2A.

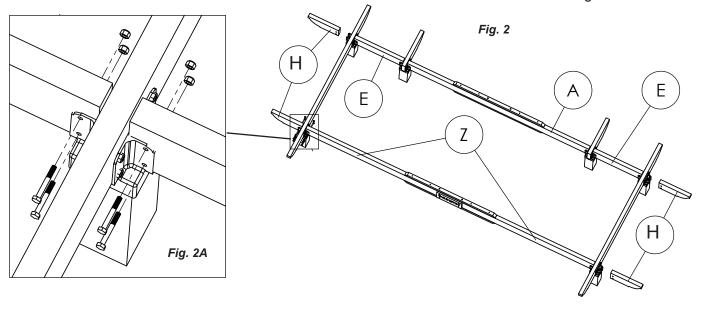

2X B 2 X 6 X 71 5/8" BEAMS

2X E 2 X 6 X 21 5/8" BEAMS


2X F 2 X 6 X 16 3/4" BEAM ENDS

48X (wh) 7/16" HEX BOLT W/ NUT

4X | H | 2 X 6 X 13 1/2" BEAM ENDS

# STEP 13- INSTALLING PERGOLA ROOF



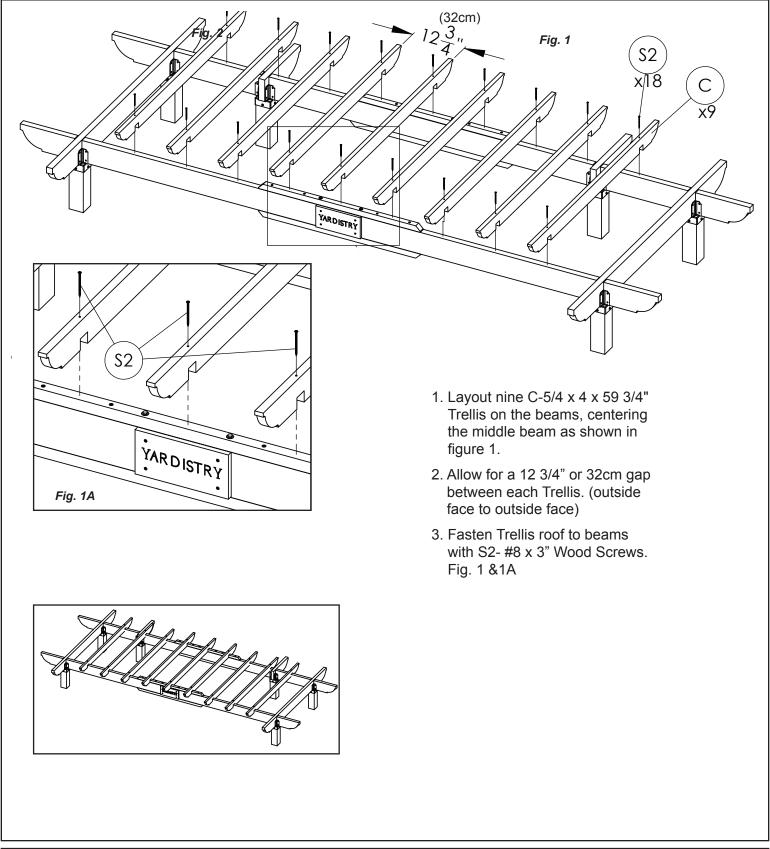

9x c 5/4 x 4 x 59 3/4" TRELLIS

18x(s2) #8 x 3" WOOD SCREWS