

COOPER LIGHTING - SURE-LITES®

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

GFR

Electrical

- 6V or 12V DC Input Voltage

RFR

Electrical

- 6V or 12V DC Input Voltage

RFR

Construction

- 20-gauge die-stamped steel housing with white baked enamel finish
- Shallow 5 1/2" housing accommodates 2x6 construction
- Housing adjusts in plaster frame 1 3/8" to accommodate different ceiling thickness
- Bar hangers included for fast, easy installation
- White painted trim ring with 5 1/8" diameter flat albalite lens
- Junction box provided for wiring terminations

RFR

Code Compliance

- UL Damp Location Listed

RFR

Warranty

- Unit: 1-year

RFR

Lamp Data

- 6 Volt Incandescent Double Contact Bayonet Base
- 12 Volt Incandescent Double Contact Bayonet Base
- Consult factory for other lamp types (See Technical Information Section)



RFR SERIES

ROUND SPECIALTY
REMOTES
CSA Certified
Emergency Lighting

ORDERING INFORMATION

RFR Series

Catalog No.	Finish	Lamp Type	Volts	Watts	Lamp No.
RFR153	White Trim	Incandescent DC Bayonet Base	12	7.5	029-53

Alternate Lamps: Consult Cooper Lighting Representative
Other Finishes Available: Cooper Lighting Representative

TOTALLY PREDICTABLE
RELIABILITY

ENERGY DATA

Power Consumption is equal to lamp wattage.

PHOTOMETRICS

Horizontal Distribution

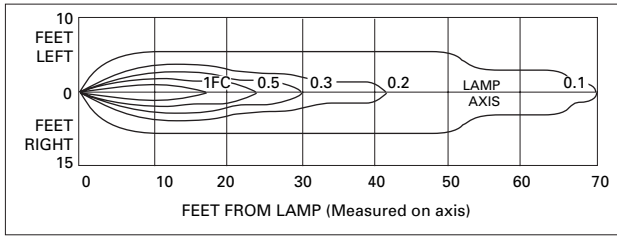


Diagram No. 12 Lamp No. 029-121 @ 75 Initial Lumens

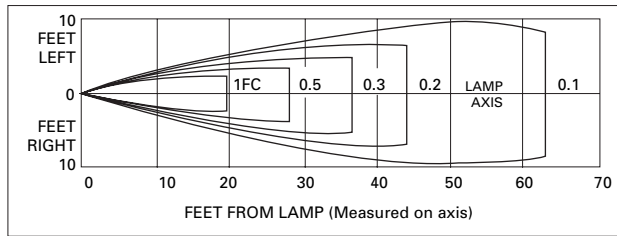


Diagram No. 3 Lamp No. 029-03 @ 108 Initial Lumens

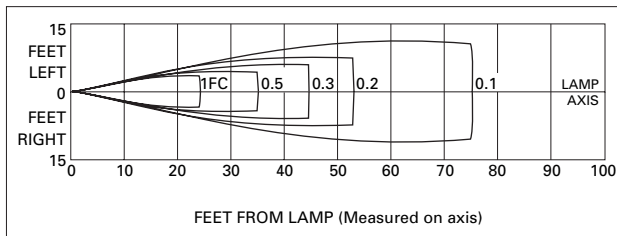


Diagram No. 6 Lamp No. 029-16 @ 155 Initial Lumens

Vertical Distribution

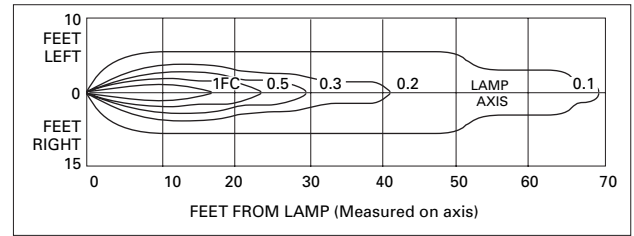


Diagram No. 12 Lamp No. 029-121

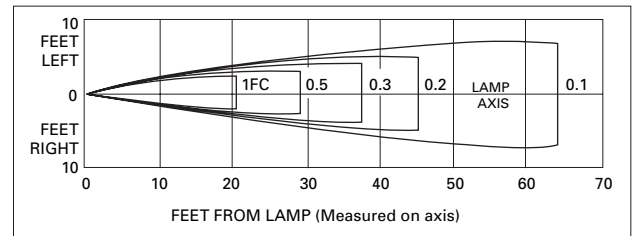


Diagram No. 3 Lamp No. 029-03

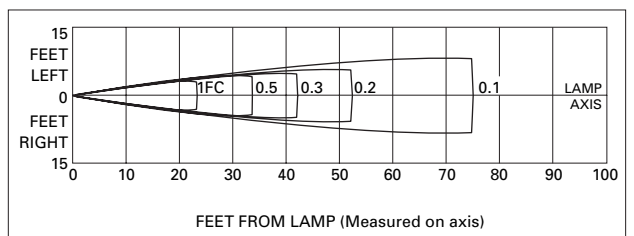


Diagram No. 6 Lamp No. 029-16