
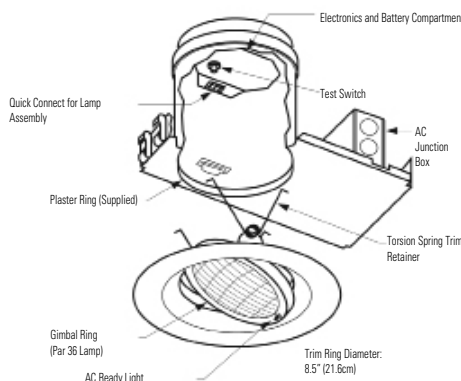


Recessed emergency lighting gimbal unit features adjustable, glare-free halogen lighting head. Unique mounting plate allows fast, easy installation.

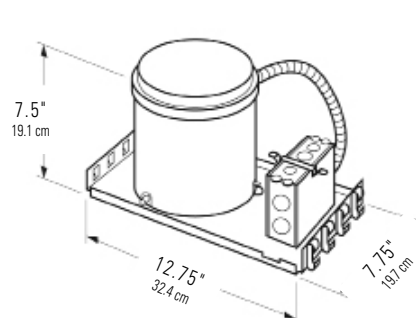

How to Specify:

MJ	1	12	W
SERIES	VOLTAGE	BATTERY WATTAGE	HOUSING COLOR
MJ = Chicago Gimbal Unit	1 = 6V	12 = 12 Watt	W = White

Unit Battery Capacity

Unit	DC Voltage	Lamp Wattage	Battery Watts to 87% of Rated Voltage*			
			1½ hrs.	2 hrs.	4 hrs.	8 hrs.
MJ112W	6	12	12	8	—	—

* Per NEC Specifications

Features

- 1. Illumination:** A high output incandescent sealed beam lamp provides glare-free light distribution. 6 volt, 12 watt bi-pin halogen has an expected life of 100 hours.
- 2. Housing:** Housing, Plaster Ring and Gimbal Trim are constructed of heavy duty steel construction and is finished in white baked-on powder paint providing scratch and corrosion resistance. The gimbal ring allows full adjustment of the unit lighting head.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 68°F (20°C) to 86°F (30°C). Pure lead and nickel cadmium batteries are optional.
- 5. Warranty:** Unit: 3 years (excludes lamps), Battery: 3 year full, 7 years pro-rata

Code Compliance

Unit is UL 924 Listed and meets NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes.

Meets CCEA plenum rating requirements

Options

B = Black Finish
SP = Special Paint Finish - Specify Color
AGP = Pure Lead Battery
AGN = Nickel Cadmium Battery

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0508