


# Rim Owners Manual



**Write Model Number  
From Box Here:**

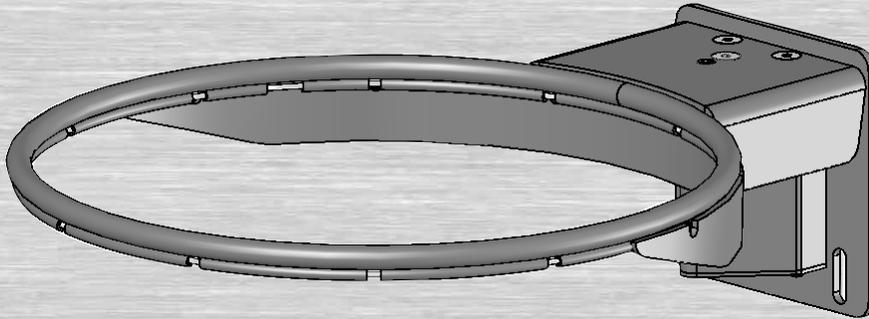

**! WARNING!**

**READ AND UNDERSTAND  
OPERATOR'S MANUAL  
BEFORE USING THIS UNIT.**

**FAILURE TO FOLLOW  
OPERATING INSTRUCTIONS  
COULD RESULT IN INJURY  
OR DAMAGE TO PROPERTY.**

Customer Service Center  
• 200 American Avenue • Jefferson, IA 50129  
[www.spalding.com](http://www.spalding.com) • [www.basketballproducts.com](http://www.basketballproducts.com) • [www.hydra-rib.com](http://www.hydra-rib.com)

## REQUIRED TOOLS AND MATERIALS:



• (2) Stepladders 8 ft. (2.4 m)



• (1) Allen Wrench (5/16")



• (1) Carpenter's Level




• (1) Phillips-Head Screwdriver



• (2 each) 9/16" Wrenches and/or Socket Wrenches and Sockets




(Deep-Well Sockets 9/16" are Recommended).

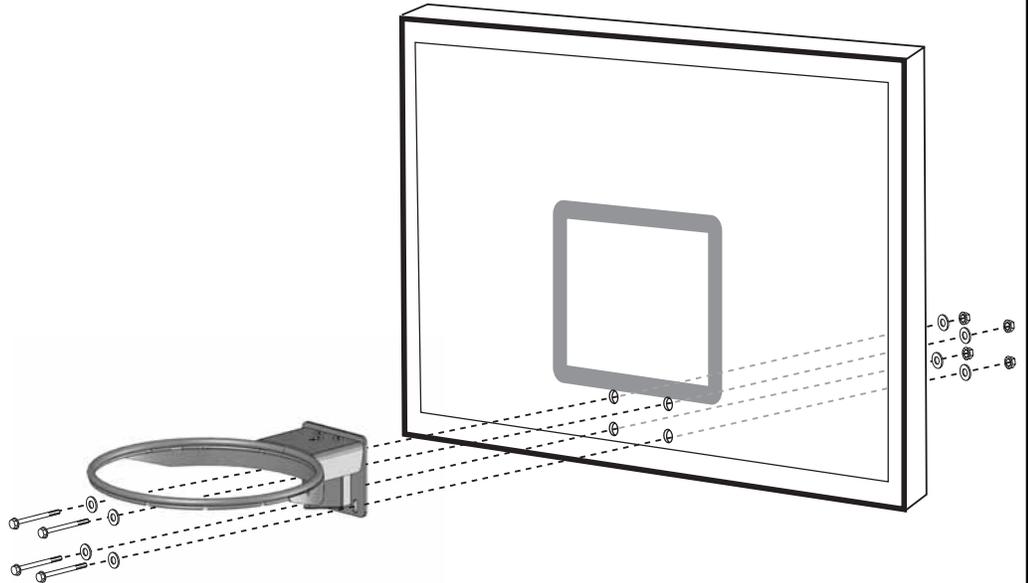


## TO ADJUST TENSION

Remove the rim cover from the rim and make adjustments as shown.

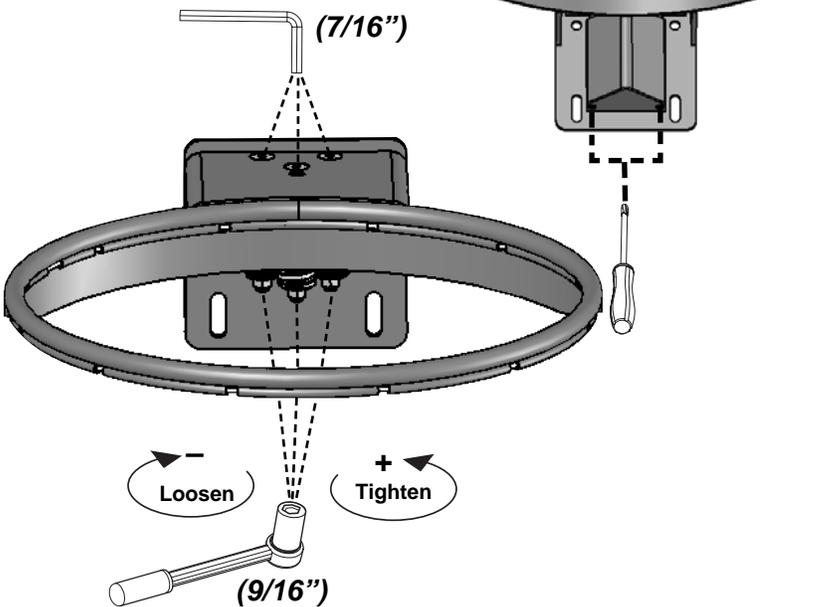

## TO LEVEL RIM

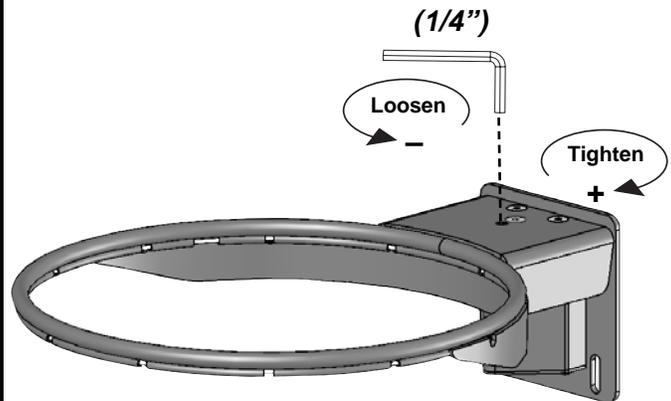

## INSTALL NET

- A. Remove nylon net-holder from the rim.
- B. Reinstall while inserting all net loops into slots along ring as shown.

