


### Features

- Acrylic
- Variable speed pump with 1.5 kW heater, back-lit user keypad and remote control
- 6 Flexjets™
- Ten color-matched sequencing Bodyssage™ backjets
- 8 effervescent ports
- 4 chromatherapy lights
- 240 V, 20 A electrical service
- Drilled for required grab bars
- Coordinating Revival® Suite
- 72" (1829 mm) x 42" (1067 mm) x 22" (559 mm)

### 6' EXPERIENCE BATH WHIRLPOOL WITH SPA/MASSAGE PACKAGE

**K-1375-LV**  
ALSO K-1375-RV

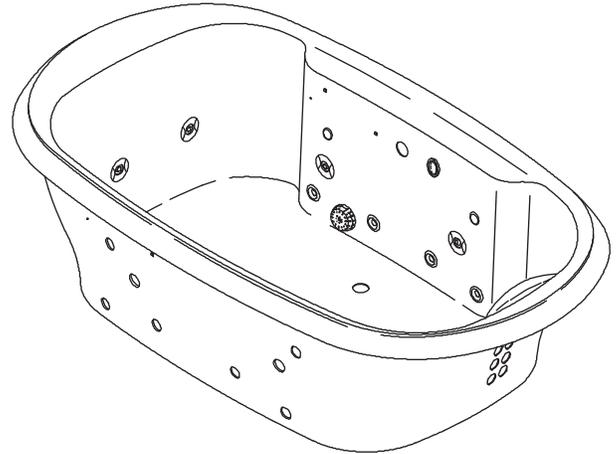

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- ASTM E662
- ASTM E162
- UL 1795
- CSA B45.5/IAPMO Z124

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass

### Specified Model

Model	Description	Colors/Finishes	
K-1375-LV	Bath whirlpool with Spa/Massage Package – pump on left	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1375-RV	Bath whirlpool with Spa/Massage Package – pump on right	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

#### Required Accessories

K-9653	Grab bars (pair)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
--------	------------------	-----------------------------	-----------------------------	--------------------------------------

#### Recommended Accessories

K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
-----------	-------------------------	-----------------------------	-----------------------------	--------------------------------------

### Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Product shall have 6 Flexjets, 8 effervescence ports, and 4 chromatherapy lights. Product shall have a variable speed pump, 1.5 kW heater, back-lit user keypad and remote control. Product shall have 10 color-matched sequencing Bodyssage backjets and 2 pulsating neckjets with pillow. Product shall be drilled for K-9653 grab bars (required) and UL listed. Product shall coordinate with Revival® Suite. Bath whirlpool shall be Kohler Model K-1375-\_\_\_\_\_-\_\_\_\_\_.

# REVIVAL®

## Technical Information

Fixture*:				
Basin area:				
Bathing area, bottom	40" (1270 mm) x 27" (686 mm)			
Bathing area, top	61" (1549 mm) x 32" (813 mm)			
Weight	165 lbs (75 kg)			
To overflow:				
Water depth	16" (406 mm)			
Capacity	90 gal (341 L)			
* Approximate measurements for comparison only.				
Pump:	kW	V	Hz	A
	1.5	240	50/60	15
Cut-out template			113311-7	

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	220-240 V, 20 A, 50/60 Hz
--------------	---------------------------

## Installation Notes

Install this product according to the installation guide.

Pump/piping protrudes beyond rim (see below).

Maximum deck thickness should not exceed 2" (50 mm).


Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (214 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

No change in measurements with drain shown. (K-7167-AF)

■ Recommended faucet area.

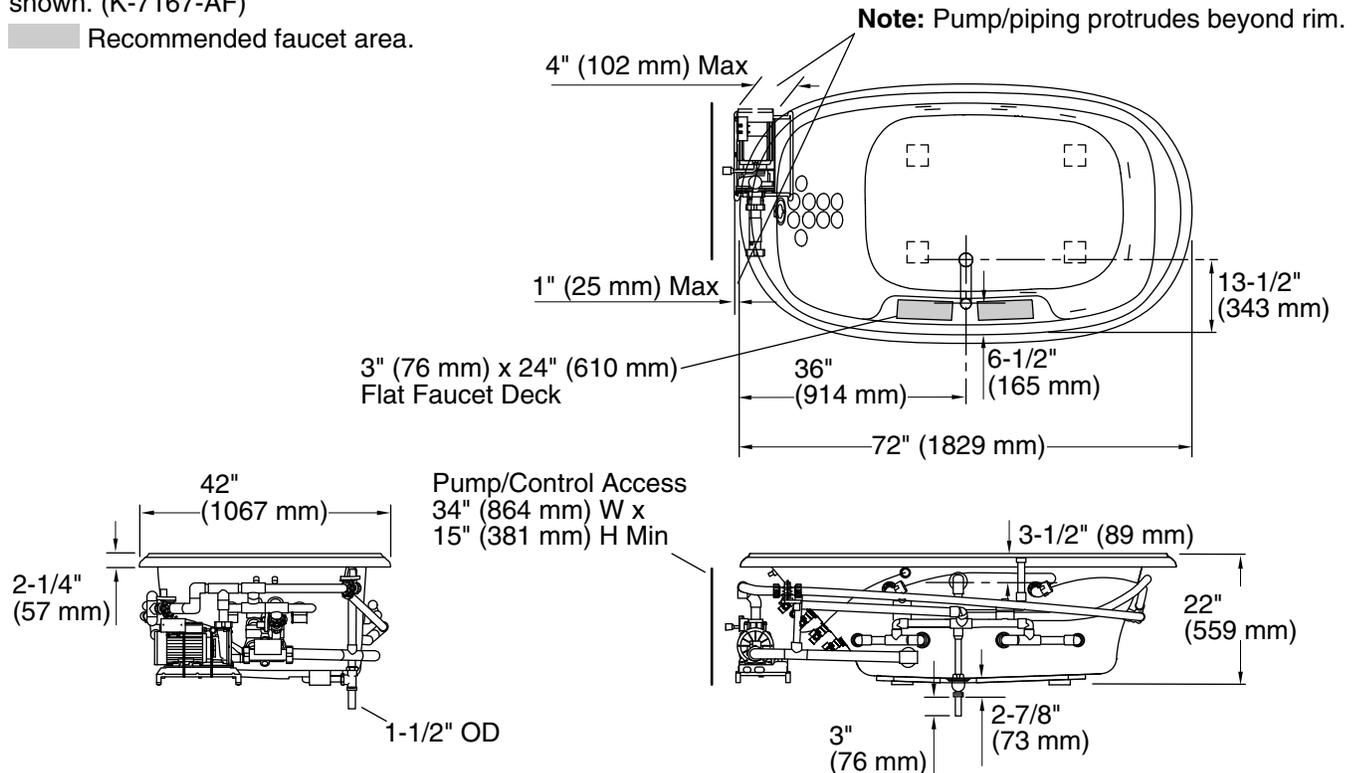

## Product Diagram