



Jay Dermafloat™ LAL 1100

SUNRISE


Air Support Systems



www.sunrisemedical.com

APM 480 & APM 350

- Comfort Control Settings allow for best patient immersion and comfort. Available in 8" mattress (APM 480) or 5" overlay (APM 350) depths.
- Support cells alternately inflate and deflate to redistribute skin surface pressure.
- 8-minute cycle time encourages circulation to the epidermal skin layer.
- An adjustable pump allows custom setting for patient comfort.
- Breathable yet waterproof low-shear cover zips all around for easy cleaning.
- Supply tubes feature CPC connectors that mate to seal air inside the mattress; great for transport or power failure.
- 5/16" air supply tubes are spring-loaded to discourage kinks.
- 11-ft. power cord and 5-ft. tubing keep pump out of the way.
- 8" mattress features no-skid bottom and heavy duty nylon straps for attachment.
- 5" overlay features heavy duty elastic corner straps for attachment.

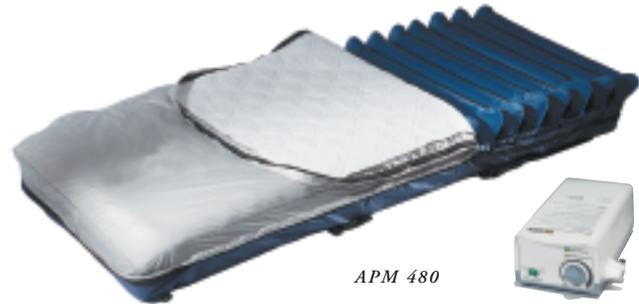

APM 480 & APM 350 Control Unit

Materials	Durable plastic
Dimensions	6" x 10" x 3.8" (15 cm x 25.4 cm x 9.6 cm)
Weight	4 lbs. (1.8 kg)
Cycle Time	8 minutes
Electrical Rating	110V, 60 Hz
Electrical Cord	11 foot SVT cord
Code Approvals	UL CSA TUV CE
Warranty	1 year limited

APM 350 5" Overlay

Inflated Dimensions	75" x 34" x 5" (190.5 cm x 86 cm x 13 cm)
Weight	24 lbs. (10.9 kg)
Weight Capacity	300 lbs. (136 kg)
High Pressure Range	30 - 80 mmHg
Comforter	Polyurethane, low-shear, water-resistant, vapor-permeable
Air Cells and Cushion Containment System	17 cells; Thermal Polyurethane-coated, waterproof nylon
Attachment Method	Heavy duty elastic straps
Warranty	1 year limited

APM 480 8" Mattress

Inflated Dimensions	81" x 35" x 8" (206 cm x 89 cm x 20 cm)
Weight	28 lbs. (13 kg)
Weight Capacity	300 lbs. (136 kg)
High Pressure Range	30 - 50 mmHg
Comforter	Low-shear, water-resistant, vapor-permeable cover with fiber-filled quilting
Air Cells and Cushion Containment System	20 cells; Thermal polyurethane-coated, waterproof nylon
Attachment Method	Durable nylon straps and no-skid bottom
Warranty	1 year limited

Item #	Description	Qty
350320	APM 480 8" System Includes: mattress, control unit, comforter and travel bag	1/EA
350321	APM 400 Series Control Unit	1/EA
350322	APM 480 8" Mattress	1/EA
350323	APM 480 Comforter	1/EA
350325	Travel Bag for 8" System	1/EA
350310	APM 350 5" System Includes: overlay, control unit, comforter and travel bag	1/EA
350311	APM 300 Series Control Unit	1/EA
350312	APM 350 5" Overlay	1/EA
350313	APM 350 Comforter	1/EA
350315	Travel Bag for 5" System	1/EA
350314	Replacement Tube for 5" and 8" Systems	1/EA

Always ensure proper fit with specific homecare or hospital beds prior to patient use.

APP 225 & APP 125

2.5" System with Adjustable Pump

- 2.5" heavy duty bubble style pad is sealed using uniform weld to increase cell durability.
- APP 225 features an adjustable system that allows for individualized patient settings to accommodate different user weights.
- Sleek pump housing comes with foldaway hooks for safe storage off the floor, keeping tubes and cords out of harm's way.
- 11-ft. power cord and 5-ft tubing ensure pump can reach desired mounting site.



APP 125

APP 225

SAM 35

3.5" Static Air Mattress

- 3.5" heavy duty anti-microbial overlay resists puncture and simplifies cleaning.
- Adjustable corner straps for secure attachment to mattress.
- 55 waffle vents to evaporate perspiration; helps keep moisture off delicate skin.
- Portable unit deflates in seconds.



SAM 35 PAD
two-way hand pump sold separately

APP 225 Control Unit

Material	Durable plastic
Dimensions	5.2" x 10" x 3.8" (13.6 cm x 25.4 cm x 9 cm)
Weight	3 lbs. (1.4 kg)
Cycle Time	5 minutes
Electrical Rating	110V, 60 Hz
Electrical Cord	11 foot SVT cord
Code Approvals	UL CSA TUV CE
Warranty	1 year limited

APP 125 Control Unit

Material	Durable plastic
Dimensions	4.2" x 8.5" x 3.8" (10.6 cm x 21.6 cm x 9 cm)
Weight	3 lbs. (1.4 kg)
Cycle time	5 minutes
Electrical Rating	110V, 60 Hz
Electrical Cord	11 foot SVT cord
Code Approvals	UL CSA TUV CE
Warranty	1 year limited

APP 125 & 225 Bubble Overlay Pad

Inflated Dimensions	78" x 34" x 2.5" (198 cm x 86.4 cm x 6.3 cm)
Weight	7.5 lbs. (3.6 kg)
Weight Capacity	250 lbs. (113.4 kg)
Washable	Multiple-patient use
Warranty	90 days limited

SAM 35 Static Air Mattress

Material	Heavy duty anti-microbial vinyl
Dimensions	75" x 32" x 3.5" (190.5 cm x 81 cm x 8.9 cm)
Weight	8 lbs. (3.6 kg)
Inflation	Manual; 2-way push/pull hand pump sold separately
Warranty	90 days limited

Item #	Description	Qty
350387	APP 225 2.5" System Includes adjustable pump, pad and tubing	1/EA
350088	APP 225 Control Unit	1/EA
350317	APP 125 2.5" System Includes pump, pad and tubing	1/EA
350085	APP 125 Control Unit	1/EA
350080	2.5" Pads (10-pack) excludes tubing & connectors	10/CS
350082	2.5" Pad (1-pack) excludes tubing & connectors	1/EA
350084	Replacement tube for 2.5" systems (1/4" tube)	1/PR
350070	Connection adapter for legacy pumps/pads (1/4" to 3/8" tube)	1/PR
350071	SAM 35 3.5" Static Air Mattress	1/EA
350074	2-way hand pump for SAM 35	1/EA

LAL 1100

Control Unit

- Easy-to-use dial adjusts pressure level from soft to firm.
- Compact, lightweight and durable case.
- Quiet operation allows patient to sleep more soundly.
- Blower-driven system provides “genuine low air loss” with all the benefits of significant air movement.
- CPR quick-disconnect for rapid deflation.

Standard Low Air Loss Mattress

- Max inflates within seconds.
- To reduce skin maceration, “genuine low air loss” is provided throughout all twenty air cells of support.
- Air cushions are constructed of high quality, low shear nylon to reduce skin breakdown.
- Convoluted foam base provides additional safety and comfort.
- Low-friction, vapor-permeable comforter provides a barrier to liquids, air and bacteria.
- Rolls into its own carrying case for convenience and portability.

Homecare Low Air Loss Mattress

- Orthoderm Elite Homecare Mattress is compatible with the LAL 1000 Series control unit with adapter. Wide mattress also available.

The Jay Dermafloat LAL 1100 is designed to work hard for you and your patients in all types of settings. A deluxe comforter and high-output control unit provide therapeutic benefit to patients suffering from or at risk of developing pressure ulcers. The LAL 1100 is one of the lightest, most durable and easiest to use genuine low air loss systems on the market.



Jay Dermafloat

Specifications & Ordering Information

LAL 1000 Control Unit

Dimensions	9" x 10" (23 cm x 25 cm)
Weight	8.5 lbs. (3.9 kg)
Electrical Rating	120V/60Hz
Agency Approvals	UL 544/CE
Warranty	2 year limited

LAL 1100 Mattress

Inflated Dimensions	
Standard Mattress	80" x 34" x 10" (203 cm x 86 cm x 25 cm)
Homecare Mattress	80" x 35" x 10" (203 cm x 89 cm x 25 cm)
Wide Mattress	83" x 39" x 10" (211 cm x 99 cm x 25 cm)
Weight Capacity	300 lbs. (136 kg)
Comforter	Polyurethane, low-shear, water-resistant, vapor-permeable
Air Cells and Cushion Containment System	20 cells over foam base; low-shear nylon
Warranty	1 year limited

Item #	Description	Qty
360200	LAL 1100 Standard System Includes: mattress, control unit and comforter	1/EA
360240	Replacement Standard Mattress & Comforter	1/EA
360130	Replacement Standard Comforter	1/EA
360260	LAL 1100 Homecare System Includes: mattress, control unit and comforter	1/EA
350511	Replacement Homecare Mattress & Comforter	1/EA
360280	LAL 1100 Wide Mattress System Includes: mattress, control unit and comforter	1/EA
350611	Replacement Wide Mattress & Comforter	1/EA
360220	LAL 1000 Control Unit	1/EA
360266	LAL 1000 Control Unit Adapter for Orthoderm Mattress	1/EA
360265	LAL 1100 Mattress Adapter for Orthoderm Control Unit	1/EA

Use of these mattress products is only part of a comprehensive wound care program. Factors of patient mobility, incontinence, and nutrition must also be considered. Support surfaces must be selected and approved by clinical staff to ensure these systems best fit the designated bed. All rights reserved.

We reserve the right to make dimension or specification changes or deletions consistent with design trends, product improvements, or for reasons beyond our control.