



SIDEWALL SET UP INSTRUCTIONS

Model 2000010648

Before You Begin

- Ensure the shelter is set up correctly by carefully reviewing and following all safety and installation instructions provided with the shelter.
- The sidewall may be placed in any of the openings of the Coleman Shelter.
- Shelter should be set at the highest position when used with sidewall.

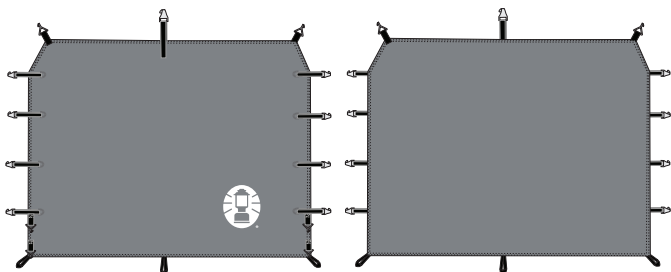


Fig. 1

Install the Sidewall

1. Unfold sidewall with the "Lantern" logo facing outside. Stretch elastic straps and hook clips at the two top corners of sidewall to the metal rings on the top of two frame posts. (Fig. 1 & 2)

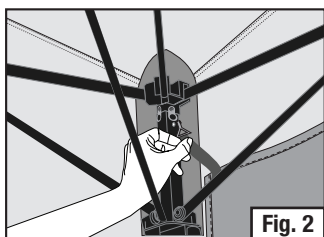


Fig. 2

2. Stretch sidewall downward until taut, insert hooks at the two bottom corners of sidewall into holes on the lower part of frame posts. (Fig. 3)

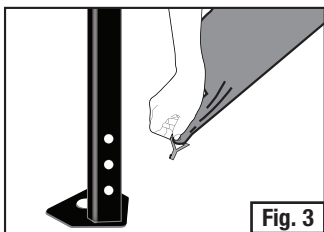


Fig. 3

3. Locate all hook & loop fasteners on edges of sidewall, then wrap around frame & frame posts to secure. (Fig. 4 & 5)

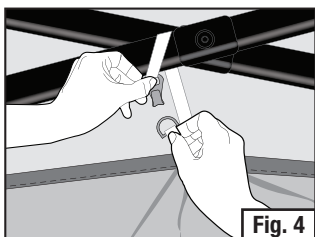


Fig. 4

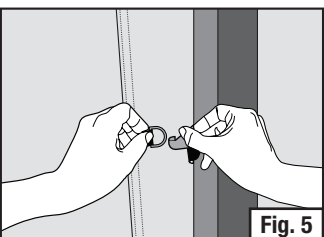


Fig. 5

4. Stretch webbing loops along the bottom edge of sidewall, then secure with stakes. (Fig. 6)

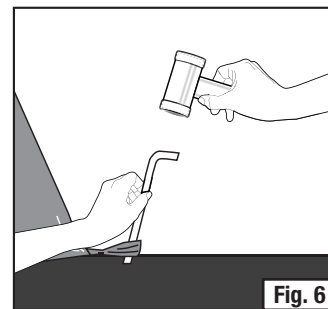


Fig. 6

5. Install the other sidewall following the same way as the sidewall with "Lantern" logo. (Fig. 7)

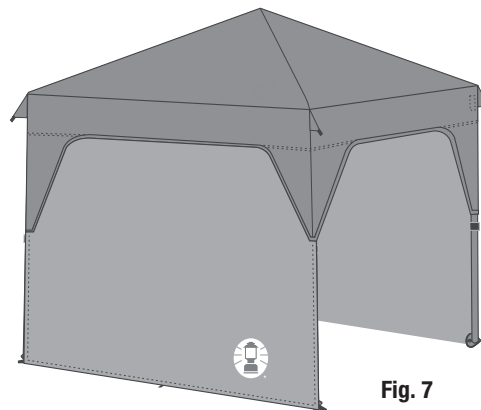


Fig. 7

Completed Shelter with sidewall

Disassemble the Sidewall

1. Remove stakes along the bottom edge.
2. Detach hooks at the two bottom corners of sidewall from holes on frame posts.
3. Detach all remaining fasteners.

To Store

1. All stakes must be placed in the storage bag to prevent damage to the fabric items placed in the carry case.
2. Make sure all components are clean and dry before placing in carry case.
3. Store in a clean, dry area.

To obtain additional Sidewall units, see your local retailer or visit www.coleman.com.

⚠ WARNING: KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THIS TENT FABRIC.

This tent meets the flammability requirements of CPAI-84. The fabric may burn if left in continuous contact with any flame source. The application of any foreign substance to the tent fabric may render the flame-resistant properties ineffective.



The Coleman Company, Inc. • 3600 North Hydraulic • Wichita, Kansas 67219 U.S.A.
1-800-835-3278 • www.coleman.com

MADE IN CHINA

© 2011 The Coleman Company, Inc. All rights reserved.
Coleman®, , and  are registered trademarks of The Coleman Company, Inc.