

Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted.

Part	Cost	Quantity	Total Cost
Complete Harness			
Assembly	\$14.99	X _____	= \$ _____
Seat Pad	\$39.99	X _____	= \$ _____
Harness Retainer	\$1.50	X _____	= \$ _____
Locking Clip	\$2.50	X _____	= \$ _____
Top Anchorage (Tether) Kit	\$9.99	X _____	= \$ _____
Latch Kit	\$24.99	X _____	= \$ _____
Instructions	\$0.00	X _____	= \$ _____

Merchandise Total: \$ _____

Shipping and handling: \$ _____

Up to \$25.00	\$5.95	\$100.01 to \$150.00	\$10.95
\$25.01 to \$50.00	\$6.95	\$150.01 to \$200.00	\$11.95
\$50.01 to \$75.00	\$8.95	\$200.01 and up	\$13.95
\$75.01 to \$100.00	\$9.95	Outside USA and Canada	\$10.00

Sales Tax: \$ _____

(Indiana, California, Arkansas, and Massachusetts residents add applicable sales tax.)

Grand Total: \$ _____

No shipping and handling on instruction manuals on quantities of 6 or less. Add \$.50 for each instruction manual over 6, then add applicable shipping and hand . . .

Fill Out For Credit Card

Visa Mastercard

Card Exp. Date: _____

Cardholder's Name: _____

Card Number: _____

Signature: _____

CUT ON DOTTED LINE

Eng. 4358-3832A


**Prospect,
Adjustable Highback Booster
Instruction Manual**

www.djgusa.com

This child restraint is designed for use by children whose:

Weight:
22-100 pounds
(10.1-45.4 kg)

Height:
34-57 inches
(85.1-144.8 cm)

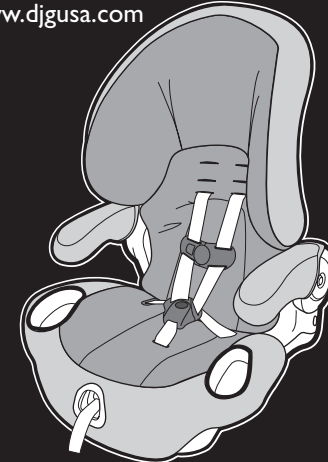

**Read all instructions
BEFORE USING this child restraint.
KEEP INSTRUCTIONS FOR FUTURE USE.**

▲ IMPORTANT!

Failure to follow the warnings on the labels and in the instruction manual can result in the death or serious injury of your child.

Para recibir las instrucciones en español, llame al 1-800-544-1108 o solicítase por escrito al dirección por arriba.

Before You Begin...

Thank you for choosing this car seat, referred to throughout this manual as a child restraint. The DJG family is committed to creating a child restraint with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any problems with this child restraint, please contact our Consumer Relations Department at:

Dorel Juvenile Group, Inc.


Website:	www.djgusa.com
Fax:	1-800-207-8182
Mailing Address:	Dorel Juvenile Group, Inc. P.O. Box 2609 Columbus, IN 47202-2609
Telephone:	1-800-544-1108 7 A.M. to 6 P.M. EST M-TH 7 A.M. to 4:30 P.M. EST FRI

On the bottom of the shell there is an expiration date for use of this child restraint. Do not use this child restraint after the expiration date.

Table of Contents

Warnings	2-4
General and Warm Weather Use	5
Registration and Recall	5
Understanding Your Vehicle	6-7
Child Restraint Parts	8-9
Choosing Restraint and Position	10-11
Aircraft Installation	11
Preparing Child Restraint	12-15
Preparing Child Restraint to Fit Your Child	16-23
Securing Your Child in the Child Restraint	24-26
Removing Your Child from the Child Restraint	27
Choosing LATCH or Vehicle Belts	28-29
Knowing Your Vehicle Belts	30-33
Locking Clip	34-35
Forward-Facing Use	36-37
Forward-Facing Installation with Vehicle Belts	38-41
Forward-Facing Installation with LATCH Belts	42-45
Adjusting the Top Anchorage Strap (Tether)	46-47
Belt-Positioning Booster Use	48
Remove Harness System	49-51
Belt-Positioning Booster Installation	52-54
Remove Backrest for Backless Belt-Positioning Booster Use	55-57
Backless Belt-Positioning Booster Installation	58-59
Reinstall Backrest	60-61
Reinstall Harness System	62-63
Removing Seat Pad for Cleaning	64-66
Replace Seat Pad	67
Warranty	68-69
Replacement Parts Order Form	73-74

 **WARNING**

Failure to follow these warnings can result in the serious injury or death of your child. To help you recognize those instructions which are most critical for your child's safety, we use this symbol :


 According to accident statistics, children are safer when properly restrained in the rear seating positions than in the front seating positions.

 Never place a child less than one-year old forward-facing.

 Check vehicle instructions for more information about air bag/child restraint use.


 Make sure the harness height is correct for your child's size.

 The harness must be snug.

 The vehicle or LATCH belt must stay tight at the belt path. When you switch from one mode to the next, review the sections of this instruction manual that apply to that mode. If you don't, your child could be seriously injured or killed.

2

 **WARNING**

 Never take your child out of the child restraint or try to tend to your child's needs while the vehicle is moving. Never leave child unattended.

 Do not use a child restraint with damaged or missing parts.


 Do not use cut, frayed or damaged harnesses.

 Do not lubricate buckles and fasteners.

 Do not substitute parts or try to modify the child restraint in any way.

 Do not use a child restraint that has been in a crash. You must get a new child restraint.

 Use the child restraint only on vehicle seats that face forward. Do not use on seats that face the sides or rear of the vehicle.

 Check the vehicle or LATCH belt before each use. Use only if the belt can be tightened properly and securely.

 Never allow any child to play with this child restraint; it is not a toy.

3



WARNING

⚠ This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure other occupants.

⚠ Do not use this child restraint if the top of your child's head is above the top of the restraint's headrest.

⚠ Dorel Juvenile Group does not recommend the use of any child restraint accessories except those recommended by DJG.

⚠ Secure the top anchorage strap (tether) provided with this child restraint as specified in both the vehicle and child restraint manufacturer's instructions.

⚠ Do not remove any of the warning labels or other labels on the child restraint.

⚠ Placing your child in a hot child restraint may result in burns.

⚠ Read instructions for other warnings.

General and Warm Weather Use

To help protect your vehicle seat's upholstery from damage, use a towel underneath and behind child restraint.

To avoid your child being seriously burned, take the following precautions:

1. Park in the shade or where sun does not directly hit the child restraint.
2. Cover the child restraint with a sheet or blanket when not in use.
3. Check for hot seat and buckles before placing child in child restraint.

Registration and Recall Information


Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address and the restraint's model number and manufacturing date to:

Dorel Juvenile Group, Inc.
PO Box 2609, Columbus, IN 47202-2609
Attn: Consumer Relations or visit www.djgusa.com
or call 1-800-544-1108

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>.

Understanding Your Vehicle


Your vehicle's features may be considerably different than those pictured here. Consult your vehicle owner's manual to help identify your vehicle's specific features.

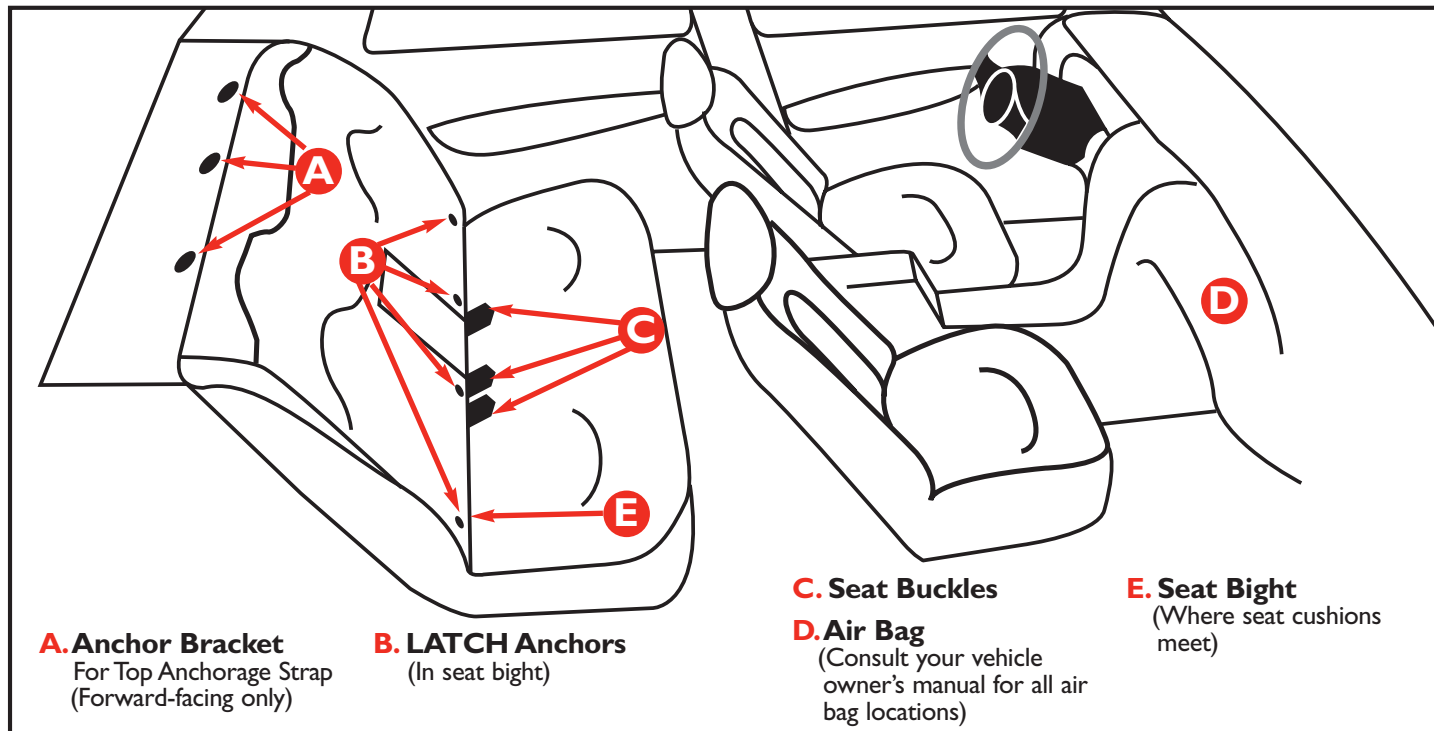

6

7

Child Restraint Parts

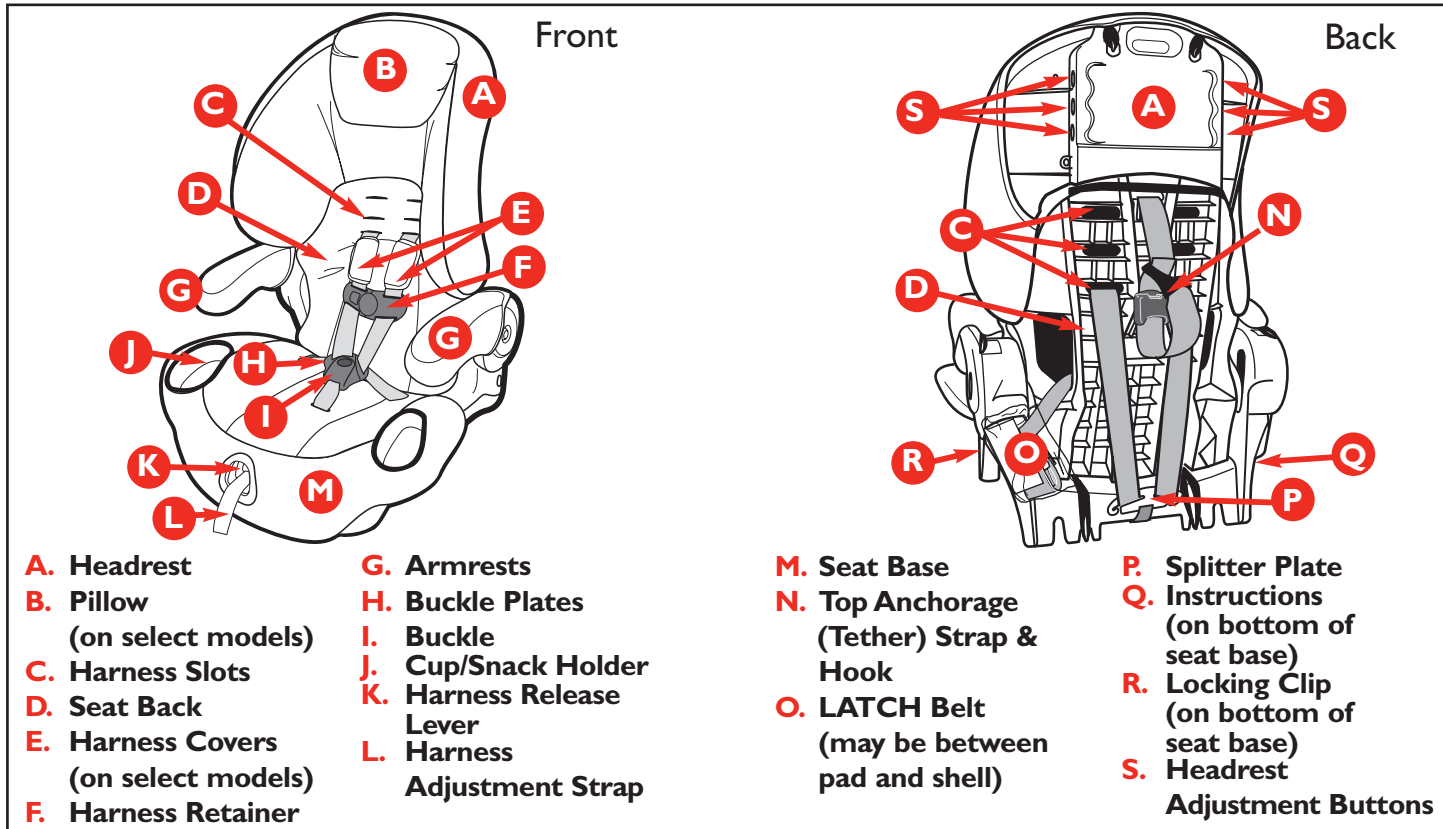


8

9

Choosing Restraint and Position


Your child's height, weight and age determine how your child restraint should be placed in the vehicle and which restraint should be used.



**22-40 lbs (10.1-18 kg)
34-43 in. (85.1-110 cm)
and Over 1 Year Old**

Forward-Facing using 5-point harness

Child and child restraint face the front of the vehicle and are placed in the back seat.




**40-100 lbs (18.1-45.4 kg)
43-48 in. (110.1-121.9 cm)
and Over 1 Year Old**

Belt-Positioning Booster using vehicle lap/shoulder belt combination

Child and child restraint face the front of the vehicle and are placed in the back seat. 5-point harness is removed.

10



**40-100 lbs (18.1-45.4 kg)
48-57 in. (122-144.8 cm)
and Over 1 Year Old**

Backless Belt-Positioning Booster using vehicle lap/shoulder belt combination

Child and child restraint face the front of the vehicle and are placed in the back seat. 5-point harness and seat back are removed.


Aircraft Installation

This restraint is certified for aircraft use only when used with the internal harness. Do not use as a belt-positioning seat because aircraft seats do not have shoulder belts. Use on forward-facing aircraft seats only and in a position where the lap belt can be tightened securely. This child restraint is installed in an aircraft seat the same way it is installed in the vehicle.


Use the child restraint only with F.A.A. certified equipment. Contact the airline prior to taking a child restraint on board in order to comply with their specific regulations.

11


Preparing Child Restraint




1 Set headrest aside.
Pull seat pad over both cup holders.



2 **Backrest to Seat Base Assembly**
Place child restraint on the floor.
Rotate seat back to the upright position with one hand while holding the harness straps away from child restraint with the other hand.



3 Align the seat back locks with the holes in the seat base.

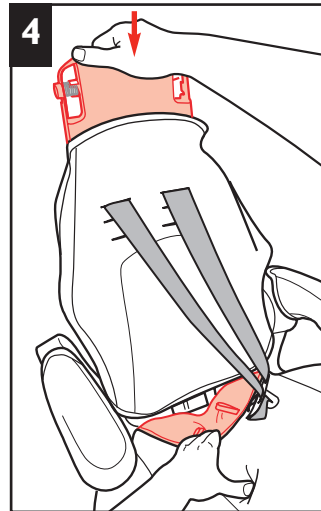


4 From the front of the child restraint, with one hand, make sure seat base pad is out of the way of the seat back locks. Grasp seat back with the other hand and push down evenly and firmly until it locks into place. Pull up on seat back to make sure it is locked.


12

13


continued on next page.



Turn child restraint over and check underneath seat to make sure the seat back locks are locked in place.



Tuck base pad behind backrest pad.




Headrest to Seat Back Assembly


Align headrest to seat back.

⚠ WARNING
Failure to use the headrest when using the backrest can result in serious injury or death.


14




Slide headrest over right headrest adjustment button.



Press in on the left headrest adjustment button.




Slide the headrest evenly down until the adjustment buttons lock into place.




15

Preparing Child Restraint to Fit Your Child

If you are going to use this child restraint with the restraint's internal harness system, you **MUST** make these adjustments with your child before you install the child restraint in the vehicle.




1 Make sure LATCH belt packaging is pulled free of child restraint shell.




2 Loosen harness by pushing down on the harness release lever while pulling out on the harness.


16



3 Press on harness retainer release button and pull apart.



4 Press red button on buckle to release the buckle plates. Place harness over sides of child restraint.



5 Place the child's bottom and back flat against the child restraint. This will increase comfort and allow the harness to properly tighten.

17


continued on next page.



6 Check Harness Height

Forward-Facing Position: Harness slots must be **even with or just above** the shoulders.

If the top harness slots are below the child's shoulders, the child weighs at least 40 lbs. (18.1 kg) and is over 1 year old, convert the seat to a belt-positioning booster.




8 To change harness location:

From the back of the restraint, remove harness from splitter plate.




Pull harness through the harness slots from the front.




Determine which set of harness slots works best for your child. Adjust if needed.



Rethread harness into new harness slot location. Make sure harness does not twist.




Refasten harness to splitter plate. Make sure harness does not twist.




To change buckle location:

From bottom of seat, locate buckle's metal clip.

⚠ WARNING
Failure to reattach the harness correctly, can result in serious injury or death.




Insert metal clip up through the shell and pad.



Determine which of the three available buckle slots is both comfortable and snug.


20




From the front, pull buckle free from shell and pad.

21

continued on next page.



Fit the buckle strap down through the slot that is both comfortable and snug. Make sure buckle faces out.




From the bottom of seat, pull buckle's metal clip completely through pad and shell.



Pull up on buckle to make sure buckle's metal plate is completely through the pad and shell.

⚠ WARNING
Failure to place buckle's metal plate completely through pad and shell can result in serious injury or death to the child.


22



Check Headrest Height


The top of the child's head should never be above the top of the child restraint's headrest. Adjust headrest if needed.

⚠ WARNING
Do not use this child restraint if the top of your child's head is above the top of the child restraint's headrest.



To raise headrest:

Push in on headrest adjustment buttons and slide the headrest up to proper position.




To lower headrest:


Push in on headrest adjustment buttons and slide the headrest down to proper position.

23

Securing Your Child in the Child Restraint




1 Position harness straps over the child's shoulders.



3 Snap the harness retainer together.


⚠ WARNING

Failure to use the headrest when using the internal harness system can result in serious injury or death.



2 Push each buckle plate into buckle until you hear a "click". Remember to always pull up on harness straps to make sure buckle is locked tightly.

24




4 Pull on harness adjustment strap to tighten harness snugly.

NOTE: A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

25


continued on next page.



5 Position the harness retainer at mid-chest (even with arm pits), away from the child's neck.

⚠ WARNING:

Failure to fasten and tighten the harness system correctly can result in serious injury or death.




6 The top of the child's head should never be above the top of the child restraint's headrest. Adjust headrest if needed.


⚠ WARNING

Do not use this child restraint if the top of your child's head is above the top of the child restraint's headrest.


Removing Your Child from the Child Restraint



1 Press on release button and pull apart.




2 Press red button on buckle to release the buckle plates. Place harness over sides of child restraint.



3 Loosen harness by pushing down on the harness release lever while pulling out on the harness. Remove child.

Choosing LATCH or Vehicle Belts

The LATCH System

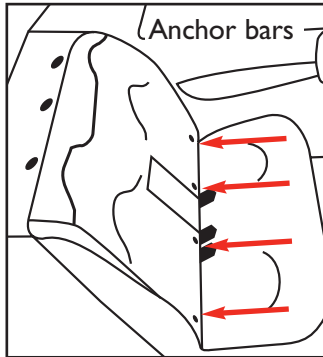


LATCH means **L**ower **A**nchors and **T**ethers for **C**hildren. Not all vehicles manufactured before September 2002 were equipped with LATCH.

The LATCH system allows a child restraint to be secured in the vehicle without using the vehicle belt system and can **ONLY** be used in vehicles that have the anchor bars installed.

Check your vehicle owners manual to see which seating positions may be equipped with the LATCH system.

Vehicle Belts



If LATCH is not an option, you will use your vehicle's belts. In most cases you will use the lap/shoulder belt combination. There are some vehicle belts that will not work with a child restraint or will require special attention. See next page for specific instructions.

Knowing Your Vehicle Belts

Not all vehicle belts will work with this child restraint. You must determine if your vehicles belts are compatible with this child restraint. If you will use the LATCH system, refer to the LATCH section.

ELR - Emergency Locking Retractor Belts

Definition: These belts only lock in a sudden stop or crash. To see if you have this type of belt, pull on the lap belt, let it return part way, then pull on it again. If it moves freely, it is an ELR belt and the child restraint could work loose during normal driving. Refer to your vehicle owner's manual.

ELR shoulder belts either require a locking clip or cannot be used with any child restraint. **Note: You may use an ELR lap and shoulder belt when using this child restraint as belt-positioning booster; no locking clip is required.**

ELR lap-only belts must be replaced with a manual belt; contact your vehicle dealer. A locking clip will not correct this problem.

Automatic/Passive vehicle seat belts

Automatic (passive) 2-point belt has no lap belt. You must install a lap belt to secure a child restraint. You may also need to install an extra lap belt for an automatic 3-point belt. Refer to the vehicles owner's manual. A locking clip will not correct this problem.


Vehicle belt too short


Contact your vehicle dealer for a seat belt extender.

Belts in center of the door or side panel (A) or middle of the vehicle seat cushion (B).

You must move the child restraint to another seating location. A locking clip will not fix this problem.


See "Locking Clip" section.

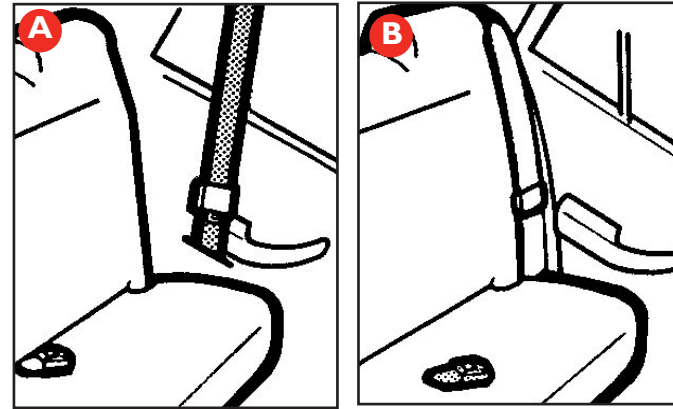

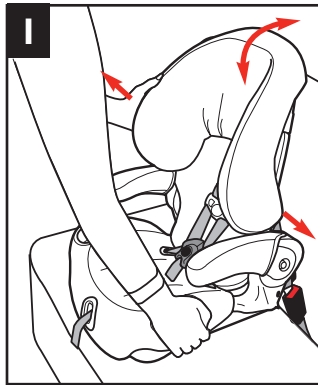

Manual Belts

Manual lap belts are common in the center rear seat and can allow the child restraint to loosen when it is tilted or jarred. After tightening the lap belt securely, tilt and push the child restraint forward and to both sides. If no loosening occurs, your child restraint should be secure.

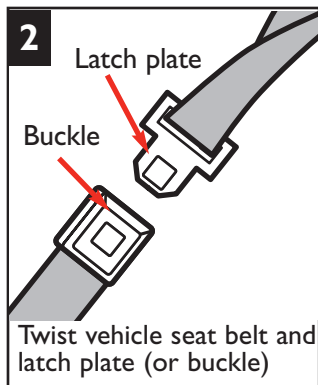

If loosening does occur, try the following: If the buckle plate slides on the belt, turn the buckle plate over. If the buckle slides, turn the buckle. Refasten the vehicle lap belt. The release button should face **out** after twisting so that it is easy to reach in an emergency.

If the lap belt continues to loosen, the child restraint must be moved to another location in the vehicle. A locking clip will not correct this problem; see your vehicle owner's manual.

⚠ WARNING


Failure to check and adjust the manual belt as described on the previous page can result in serious injury or death.

Locking Clip


NOTE: The locking clip is located on the bottom of the seat. You do not need a locking clip when using this seat as a belt-positioning booster.

Remove the locking clip when the vehicle seat belt is not being used with the child restraint. **A locking clip will not fix all types of seat belt problems.**

Before you put your child restraint in the vehicle, buckle the lap/shoulder belt. Pull on the lap belt portion. If it loosens or slips, you must either use a locking clip to hold the seat belt tight or move the child restraint to another seating location.




1 Thread both vehicle lap and shoulder belts through the slot (as shown) and out other side. Buckle. Pull up on shoulder belt until all slack is out and lap belt is tight.




2 Grasp both vehicle belts together just behind the buckle plate and unbuckle. **NOTE:** If the buckle plate ends up behind the child restraint, grasp the belts to the outside of the child restraint, as close to the buckle plate as possible.


34



3 Thread both portions of the vehicle belt onto the locking clip.



4 Position locking clip about 1 in. (2.5 cm) from vehicle belt's buckle plate.




5 Rebuckle belt. Lap belt portion should now be tight. If not, remove locking clip and repeat all steps.


35

Forward-Facing Use: 22-40 lbs. (10.1-18 kg), 34-43" (85.1-110 cm), Over 1 year of age.


Forward-Facing Use

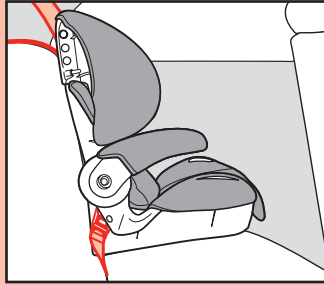

Lap/Shoulder Belt

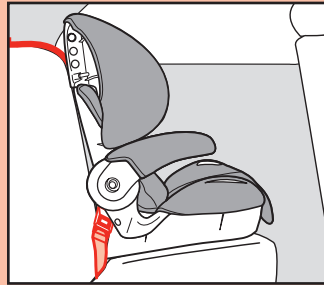

Lap Belt

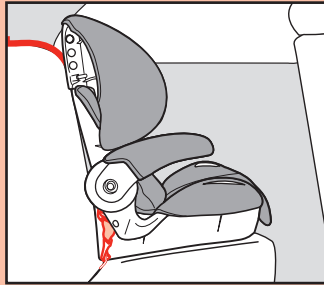

LATCH Belt


Refer to the "Choosing Restraint and Position" section to make sure your child is at the proper weight and height.

⚠ WARNING:

Using this child restraint in any vehicle seat where the lap or LATCH belts cannot be tightened securely and properly or where it can be loosened by pulling on it can result in serious injury or death.

Check vehicle instructions for more information about air bag/child restraint use.

Failure to use the child restraint's headrest when using the backrest can result in serious injury or death.




Do not use this child restraint if the top of your child's head is above the top of the child restraint's headrest.

Forward-Facing Use: 22-40 lbs. (10.1-18 kg), 34-43" (85.1-110 cm), Over 1 year of age.

Forward-Facing Installation with Vehicle Belts:

After deciding whether to use your Vehicle Belts or LATCH, be sure to read the warnings below as they pertain to both systems.

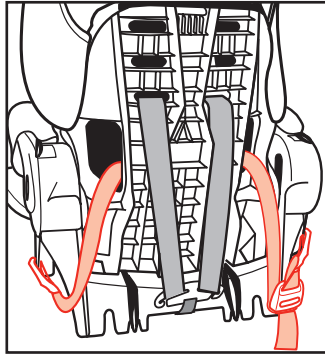


When LATCH is not being used, fasten belt hooks on the sides of the child restraint as shown.

⚠ WARNING:


Loose LATCH hooks can result in serious injury or death.

38



Place child restraint **flush** against the back of the vehicle seat **forward-facing** in the back seat.

Thread the vehicle lap belt or lap/shoulder belt combination through the belt path and out other side. Buckle.




Place one knee in the child restraint and push down firmly while pulling up on belt to tighten. For a manual belt, refer to "Knowing your Vehicle Belt" section.

39

continued on next page.


Forward-Facing Use: 22-40 lbs. (10.1 - 18 kg), 34-43" (85.1-110 cm), Over 1 year of age.



With knee still in child restraint, attach hook to anchor in vehicle. Push down firmly and tighten top anchorage strap.

To adjust top anchorage strap: See “Adjusting Top Anchorage Strap” section.

NOTE: If your vehicle does not have an anchor bracket, tuck the top anchorage strap’s hook under the child restraint.

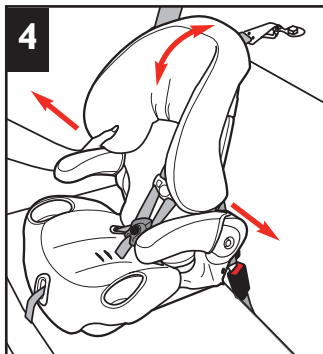


With weakest hand at belt path, tilt and push the child restraint forward and back, and from side to side. If the seat belts do not loosen, your child restraint should be secure.

NOTE: Some “play” from front to back or about an inch from side to side is acceptable. If it moves more, review “Knowing Your Vehicle Belts” and “The Locking Clip” sections.


⚠ WARNING

Using this child restraint in any vehicle seat where the lap belt cannot be tightened securely and properly or where it can be loosened by pulling on it can result in serious injury or death.

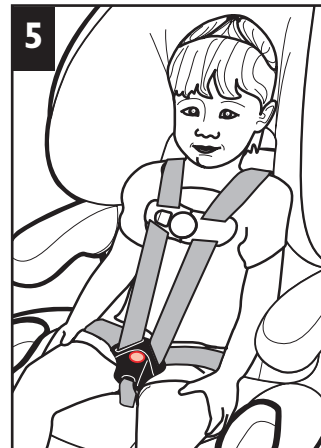


After checking for hot seat and buckles, place your child in the child restraint as described in the “Securing Your Child in the Child Restraint” section.

Forward-Facing Installation with LATCH Belt: Install LATCH Belts



NOTE: Do not use LATCH system along with the adult lap or lap/shoulder belt.


Route LATCH belt through upper slot in side of shell.




Pull one LATCH hook across the back and out the other side.

The LATCH adjuster can be on either side, but the belt should not be twisted.


42



Place child restraint **flush** against the back of the vehicle seat **forward-facing** in the back seat.



Fasten one LATCH belt hook to the anchor in the vehicle seat located in the vehicle seat bight. Repeat for other side of child restraint. See your vehicle owner's manual for locations and more information.




Place one knee in the child restraint and push down firmly while pulling up on the loop to tighten belt.


43

continued on next page.

Forward-Facing Use: 22-40 lbs. (10.1 - 18 kg), 34-43" (85.1-110 cm), Over 1 year of age.



With knee still in child restraint, attach hook to anchor in vehicle. Push down firmly and tighten top anchorage strap. To adjust top anchorage strap: See “Adjusting Top Anchorage Strap” section.




With weakest hand at belt path, tilt and push the child restraint forward and back, and from side to side. If the LATCH belts do not loosen, your child restraint should be secure.

NOTE: Some “play” from front to back or about an inch from side to side is acceptable.


If the child restraint does not remain tight, do not use the child restraint in this seating location with this LATCH system.

⚠ WARNING

LATCH hooks MUST be securely fastened. Failure to do this can result in serious injury or death.



After checking for hot seat and buckles, place your child in the child restraint as described in the “Securing Your Child in the Child Restraint” section.



To remove LATCH: Press down firmly on adjuster side of child restraint and press release button on adjuster to release tension. Unhook LATCH hooks.


Adjusting the Top Anchorage Strap

The top anchorage strap is used for the forward-facing position only.

Most vehicles made after 9/1/99 already have the anchor hardware for a top anchorage strap. Refer to your owner's manual or call your dealer.


Storage of Top Anchorage Strap:

Belt-Positioning Booster position: Place top anchorage strap and anchor hook under the child restraint.



To Attach Top Anchorage Strap:


Put knee in child restraint and push down; attach hook to anchor in vehicle.



Pull loose end to tighten

To Adjust Top Anchorage Strap:

To tighten; pull on free end of top anchorage strap.




Lift up to loosen

To loosen; lift up on top anchorage lock and push lock toward top anchorage hook.

Forward-Facing Use: 22-40 lbs. (10.1 - 18 kg), 34-43" (85.1-110 cm), Over 1 year of age.

Belt-Positioning Booster Use


Make sure your child is at the proper weight and height to use the belt-positioning booster or backless belt-positioning booster.

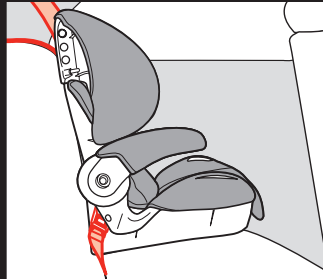

Lap/Shoulder Belt

Belt-Positioning Booster

40-100 lbs
(18.1-45.4 kg)
43-48 in.
(110.1-121.9 cm)
and Over 1 Year Old.

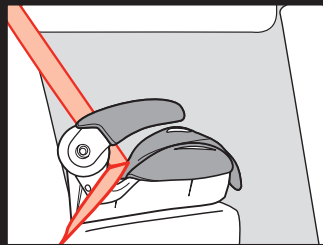


Lap/Shoulder Belt

Backless Belt-Positioning Booster


40-100 lbs
(18.1-45.4 kg)
48-57 in.
(122-144.8 cm)
and Over 1 Year Old.

Remove Harness System

Harness must be removed for use as a Belt-Positioning Booster.



From the back of the restraint, remove harness from splitter plate.




Pull harness adjustment strap as far out as possible.




Pull harness through the harness slots from the front.

Belt-Positioning Booster Use: 40-100 lbs. (18.1-45.4 kg), 43-48" (110.1-121.9 cm), Over 1 year of age.



4 Under the seat, place finger under metal clip on the side harness and lift off harness guide. Do the same for the other side harness.




5 From the front, pull both harness guides free from shell and pad.




6 From under seat push metal clip up and out through slot in bottom of seat then pull the harness free.

50



7 From under seat, push buckle metal clip up and out through slot in bottom of seat.




8 From the front, pull buckle free from shell and pad. Keep harness system for future use.

51

Belt-Positioning Booster Use: 40-100 lbs. (18.1-45.4 kg), 43-48" (110.1-121.9 cm), Over 1 year of age.


Belt-Positioning Booster Installation

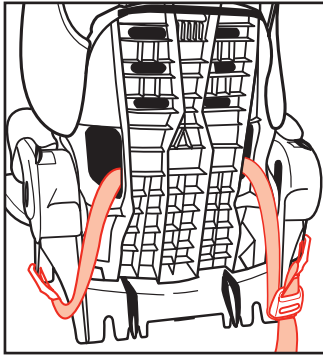

Do not use LATCH when using the belt-positioning booster.
You **MUST** fasten LATCH belt hooks on the sides of the child restraint as shown.


⚠ WARNING:

Loose LATCH hooks can result in serious injury or death.



Place booster seat against the back of the vehicle seat. Tuck the top anchorage hook under the child restraint. Have child sit in seat with his or her back and bottom fully in the seat.


52



Place lap belt across child's thighs. Lock buckle.


NOTE: Make sure the lap and shoulder belt are placed under armrest as shown.

⚠ WARNING



Do not use this booster seat with the backrest if the top of your child's head is above the top of the booster seat's headrest. Convert to the backless belt-positioning booster.

Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat.




Do not use this booster with the backrest if the bottom edge of headrest is lower than the top of the child's shoulders. Convert to the backless belt-positioning booster.

Failure to follow these warnings can result in serious injury or death to your child.

53

continued on next page.

Belt-Positioning Booster Use: 40-100 lbs. (18.1-45.4 kg), 43-48" (110.1-121.9 cm), Over 1 year of age.



Secure the shoulder belt behind the headrest. Make sure the bottom of headrest is above to top of the child's shoulders. The belt should cross the base of the child's neck and lie across the chest (not the face or neck). Pull up on the shoulder belt to tighten. Check periodically to ensure that your child has not moved out of position and loosened the shoulder belt.

⚠ WARNING

Check vehicle instructions for more information about air bag/child restraint use.

Do Not Use only the lap belt when using this seat as a belt-positioning booster without the internal harness.

The shoulder belt must always be adjusted snugly across the child's chest.


NEVER place the shoulder belt under the child's arms.

Failure to follow these warnings can result in serious injury or death to your child.




Remove Backrest for Backless Belt-Positioning Booster Use

Remove harness system (see "Remove Harness System" section).

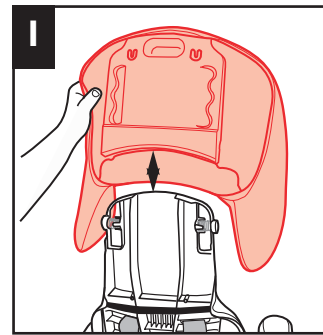


Remove Headrest

Press in on both headrest adjustment buttons and remove headrest.




Remove Backrest


From the bottom of the child restraint, squeeze middle backrest lock in and push backrest down.



3 Push in both outside backrest locks and push backrest out of base.




4 Rotate backrest forward.




5 Push out on one armrest and pull backrest's locking tab out of armrest.

56



6 Pull the other backrest locking tab out of other armrest.
Store headrest, backrest and harness system for future use.




7 Attach elastic straps to the back of the base.

57


Belt-Positioning Booster Use: 40-100 lbs. (18.1-45.4 kg), 48-57" (122-144.8 cm), Over 1 year of age.

Backless Belt-Positioning Booster Installation




1 Place booster seat against the back of the vehicle seat. Have child sit in seat with his or her back and bottom fully in the seat.

⚠ WARNING:



Do not use the base as a belt-positioning booster if the midpoint of your child's head is above the top of the vehicle seat back.



2 Place lap belt across child's thighs. Lock buckle. The shoulder belt should cross the base of the child's neck and across the chest (not the face or neck). Pull up on the shoulder belt to tighten belt snugly.

NOTE: Make sure the lap and shoulder belt are placed under armrest as shown.

Check periodically to ensure that your child has not moved out of position and loosened the shoulder belt.

⚠ WARNING

Check vehicle instructions for more information about air bag/child restraint use.

Do Not Use only the lap belt when using this seat as a belt-positioning booster without the internal harness.




The shoulder belt must always be adjusted snugly across the child's chest.

Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat. Failure to do this can result in serious injury or death.


NEVER place the shoulder belt under the child's arms.

Failure to follow these warnings can result in serious injury or death to your child.


Reinstall Backrest



1 Release the elastic strap that is sewn to the back edge of seat base pad.




2 Push in one backrest locking tab into armrest. Make sure back of backrest is at the back of seat base.



3 Push out on the other armrest to slide in backrest's locking tab into the slot in the armrest.

60




4 Rotate backrest backwards.


Follow the steps in the "Preparing Child Restraint" section for complete backrest and headrest assembly.

61


Reinstall Harness System



1 Insert metal clip of the buckle down through the pad and shell.




2 From under seat, pull metal clip down through slot in bottom of seat. From the front, pull buckle tight.



3 Push harness clip down through slot in the pad and shell.


62



4 While pulling up on strap, slide harness guide into slot until it clicks in place. Do the same for the other side harness.



5 Rethread harness into harness slots. Make sure harness does not twist.



6 Refasten harness to splitter plate. Make sure harness does not twist.

63


⚠ WARNING

Failure to reattach the harness correctly, can result in serious injury or death.


Removing Seat Pad for Cleaning

Remove harness as described in the “Belt-Positioning Booster” section.

Remove headrest and backrest as described in the “Remove Backrest for Backless Belt-Positioning Booster Use” section.




1 Remove the elastic straps from back of headrest.




2 From the front of headrest, pull pad off.


64



3 Remove pad from backrest. Start by sliding pad off of backrest's locking tab.




4 Slide pad off of top of backrest.




5 Remove pad from seat base. Start by unhooking the elastic on back of seat base.

65

continued on next page.



Pull pad off around cup/snack holder and remove pad.



If your model has armrest pads, undo the elastic straps from tops of armrests and pull armrest pads off.

Hand wash with warm sudsy water, rinse clean and air dry. Do not use bleach or other harsh cleaners. Do not dry clean.

Spot clean harness straps and armrests. Do not machine wash.

Replace Seat Pad

Replace seat pad by reversing order;

Seat Base Pad: Starting from front of the child restraint, slip pad on seat base. Attach the elastic straps from middle of pad to back of seat base.

Backrest Pad: Starting from the top, slide on narrow end of pad. Attach sides of pad to the backrest's locking tabs.

Headrest Pad: Starting from the bottom, slip on pad and pull over top of headrest. Attach the elastic straps to the back of headrest.

Assemble backrest to seat base (see "Reinstalling Backrest" section). Assemble headrest to backrest (see "Preparing Child Restraint" section). Rethread harness system (see "Reinstall Harness System" section).

Warranty

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:

This product is warranted against defective materials or workmanship for one year from the date of original purchase.

An original receipt is required to validate your warranty. DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may contact us at www.djgusa.com, fax us at 1-800-207-8182 24 hours a day, write to DJG, Consumer Relations Department, P.O. Box 2609, Columbus, IN 47202-2609, or call 1-800-544-1108 from 7:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 7:00 a.m. to 4:30 p.m. on Friday. **Proof of purchase is required and shipping charges are the responsibility of the consumer.**

Warranty Limitations:

This warranty does not include damages which arise from misuse or abuse of this product.




Limitation of Damages:

The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

Limitation of warranties and other warranty terms and state law rights:

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.

PLEASE COMPLETE AND MAIL THE PRE-ADDRESSED OWNER REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE TO EXPEDITE WARRANTY CLAIMS AND TO VERIFY THE ORIGINAL DATE OF PURCHASE.



Replacement Parts Order Form

Complete the form below. Your model number with color code and manufacture date code **MUST** be included on the form to ensure proper replacement parts. Your model number with color code and the date code can be found on a sticker on the side of child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the next page.

Return the form with payment to:

Dorel Juvenile Group, Inc.
Consumer Relations Department
P.O. Box 2609
Columbus, IN 47202-2609

Fax orders to: 1-800-207-8182

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area below to charge to Visa or Mastercard. We do not accept personal checks or Discover Card. All outside of U.S. and Canada **MUST** use credit card.

Ship To (Please Print): _____

Name: _____

Address: _____

City: _____

State/Province: _____ Zip _____

Telephone: _____

Email Address: _____