

101201

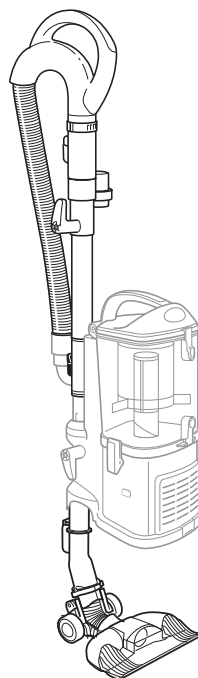
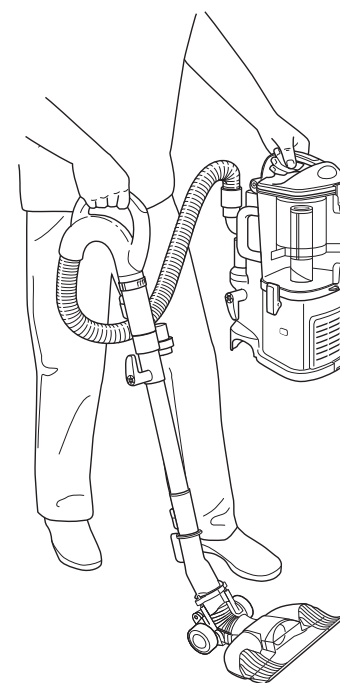
Shark**Bare Floor Nozzle**
Assembly Instructions**Navigator™**
Lift-Away™

- 1** From the Upright Vac mode, press the release button on the lower side of the canister and remove the motorized floor brush. Place the bare floor nozzle on a level floor surface, align the tube of the floor nozzle with the tube on the detachable canister and click into place. (Fig. 1)

OR

With the canister removed, insert the extension wand and handle directly onto the bare floor nozzle. (Fig. 2)

- 2** Press the On/Off switch to the "I" position to turn the suction motor on.

**Fig. 1****Fig. 2**

Ideal for bare floor cleaning and large and small particle pick up. Low profile for easy access to any area.



TOLL FREE: 1-800-798-7398

www.sharkclean.com

K



PMS 2592

XSN350W
Care Instructions
270.9gsm white offset cover stock