
LICHTOLIER® Performance Recessed CFL Downlighting 1101FDIC

Page 1 of 1

6 34" Aperture, 1 Light, Compact Fluorescent, IC AirSeal®, Frame-In Kit

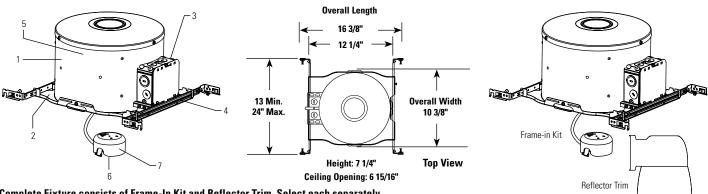

Uniframe™	Uniframe™ Compact Fluorescent Performance Series Reflector Trims						
Frame-In Kit	Horizontal Open	Horizontal Wall Wash - Single	Horizontal We Lensed / Diffu		Horizontal Cross Blade		
101FDICMX1** Advance Mark 10- 120V) 101FDICMX2** Advance Mark 10- 277V)	1101HCL 1101HCD 1101HWH	1101HCLSW 1101HCDSW 1101HWHSW	Clear Lens 1101HCLC 1101HCDC 1101HWHC	Fresnel 1101HCLF 1101HCDF 1101HWHF	1101HACB 1101HWHCB		
26w Quad/Triple GX24q-3 Base 120v — 0.26amp max 277v — 0.11amp max	Univers	al Carias Defless	Opal Lens 1101HCLO 1101HCDO 1101HWHO	faranca Trim (Chan Chant for I	Jacommondad	I ampina)
32w Triple	Universal Series Reflector Trims (Reference Trim Spec Sheet for Recommended Lamping) Cone Satin Cone Baffle Wall Wash Wet Location Cross Blade						
GX24q-3 Base 120v – 0.32amp max 277v – 0.14amp max	1112* 1113* 1113BK*	1145 1146 / 1146CD 1143	1108* 1110*	1105* 1105BNM 1105WH	1195 1196 1196CD	1121 1124 1134	1132
42w Triple GX24q-4 Base 120v — 0.41amp max	1113WH 1113CD*	1144 / 1144CD		1176 1176WH		1177SH 1178SH 1190	

Features

277v - 0.18amp max

**Add N to catalog number for preset nails

- 1. Housing: .028" (#21ga.) aluminum. UL listed for direct contact with thermal insulation. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF (or 75pa), which complies with Model Energy Code (Section 602.3.3) and Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling. Access door for inspection of junction box.
- 2. Mounting Frame: .032 (#22 ga.) galvanized steel. Accommodates ceilings up to 1 1/2" thick. 3/8" deep integral lip. Locks into position along length of mounting bars with locking screw and bendable slot. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out roto-clips hold reflector flush to ceiling.
- 3. Junction Box: 2" X 4" X 3 1/2" (22 cu. in) .032" (#22 ga.) galvanized steel. UL listed for maximum of 8 (#12 ga.) 90°C through branch circuit conductors.
- 4. Mounting Bars: .059" (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O.C. joist spacing. Bars can accommodate 12" O.C joist spacing after a slight field modification (see Instruction Sheet). Features integral self tapping phillips screws for secure attachment to wood or metal construction. Attaches to T-bar ceilings without the need of accessories.
- 5. Ballast: Mounted inside housing. 120V or 277V UL Listed Electronic Dimming Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- 6. Socket: Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- 7. Socket Housing: .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

Options & Accessories

Extra-Thick Ceiling

Mounting Ring: 1967B - 1 1/4" to 2" thick ceilings

Labels

cULus Listed (Type I.C., Suitable for Damp Location), I.B.E.W.

Complies with Air Leakage Requirements stated in the Model Energy Code and the Washington State Energy Code.

*Add NM suffix to catalog number

for Natural Metal flange and finish.

AirSeal® is a registered trademark of Lightolier

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • C0608

