

Electrolux Benefit Cabinets

Dual temperature - 1300 lt

The range consists of 1 fan assisted model of 600 litres refrigeration cabinets that offer excellent standards in terms of performance and efficiency. These models come in fridge/freezer version in 304 AISI and is available with full doors.



726465

- Internal and external structure in 304 AISI stainless steel, external base, top and back in galvanized steel. 150 mm height-adjustable feet.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Completely automatic defrosting and automatic evaporation of defrost water.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- Excellent forced air cooling system that ensures the utmost

uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.

- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- Self-closing door, positioned in less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure.
- The pressed stainless steel recessed door handle without joints makes opening the cabinet


extremely easy. All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.

- Stainless steel feet (plastic interior).
- A wide range of optional accessories are available.
- CFC and HCFC free.



Electrolux

726465

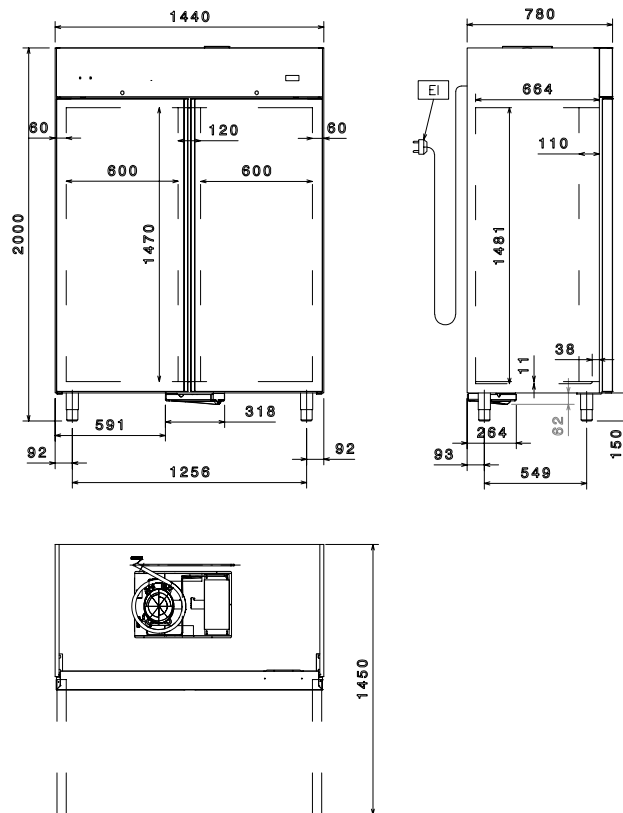

	RS13DFX2F 726465
LEGEND	
EI - Electrical connection	230 V, 1, 50
TECHNICAL DATA	
Operating temperature	
first compartment - min/max °C	-2 / 10
second compartment - min/max °C	-22 / -15
Operating mode	Ventilated
Gross capacity (D.I.N. 8952) - l.	650, 650
External dimensions - mm	
width	1440
depth/with open doors	788, 1440
height	2000
Door hinges	1 Left+1 Right
N° and type of grids (included)	6, GN 2/1
Compressor power - HP	1/5
N° defrost in 24 hrs.	4/20'
Refrigerant type	R134a
Refrigerant quantity - g.	130, 300
Refrigeration power - W	752
Power - kW	
installed-electric	0.99
Net weight - kg.	250
Power supply - V, phases, Hz	230 V, 1, 50
INCLUDED ACCESSORIES	
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	6
2/1 GN GREY "RILSAN" GRID	6
ACCESSORIES	
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539
2/1 GN AISI 304 S/S GRID	881067
2/1 GN GREY "RILSAN" GRID	880720
KIT HACCP EKIS	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457

Electrolux Benefit Cabinets

Dual temperature - 1300 lt

HAEC020

2009-10-06

Subject to change without notice