

# Electrolux Benefit Cabinets

## Digital refrigerators - 600 lt

The models detailed on this sheet are 600 liter fan assisted refrigerators that offer excellent standards in terms of performance and efficiency. These models come in 0°C and -2°C versions with a choice of materials (304 AISI, 430 AISI or white painted steel) and solid doors, either full or half height. Model RS06DX2F is constructed with two separate cells (320+320 litres) with different temperature ranges and model RS06RX1FR has a remote refrigeration unit.



726317

- External panels in 304 AISI, stainless steel or white control galvanized steel. Galvanized steel back panel and stainless steel bottom panel as standard on all models.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Completely automatic defrosting and automatic evaporation of defrost water (304 AISI models), manual emptying of defrost water (stainless steel models).
- Internal panels and door in 304 AISI or stainless steel.

- 150 mm height adjustable feet.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.

- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.



**Electrolux**

**Electrolux Benefit Cabinets**  
**Digital refrigerators - 600 lt**

- Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy.

- All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- Feet with stainless steel finish.
- A wide range of optional accessories are available.

- Extremely quiet operation at 51 Db(A).
- CFC and HCFC free.
- All models comply with the standards required by the main international approval bodies and are H marked.

	RS06NX1F 726455	RS06RX1F 726317	RS06N41F 728638	RS06PX1F 726452	RS06P41F 726454	RS06PW1F 726473	RS06RX2H 726689	RS06DX2F 726319	RS06RX1FR 727103
<b>TECHNICAL DATA</b>									
Operating temperature									
first compartment - min/max °C	-2 / 10	-2 / 10	-2 / 10	0 / 10	0 / 10	0 / 10	-2 / 10	-2 / 10	-2 / 10
second compartment - min/max °C								-2 / 10	
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of stainless steel									
external	Stainless Steel AISI 304 Scotch Brite	304 AISI	Stainless Steel	304 AISI	Stainless Steel	Prepainted Steel	Stainless Steel AISI 304 Scotch Brite	304 AISI	304 AISI
internal	304 AISI	304 AISI	Stainless Steel	304 AISI	Stainless Steel	Stainless Steel	Stainless Steel AISI 304 Scotch Brite	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.	600	600	600	600	600	600	600	300, 300	600
Cooling unit	Built-In	Built-In	Built-In	Built-In	Built-In	Built-In	Built-In	Built-In	Remote
External dimensions - mm									
width	720	720	720	720	720	720	720	720	720
depth/with open doors	788, 1440	788, 1440	788, 1440	788, 1450	788, 1440	788, 1440	788, 1450	788, 1440	788, 1440
height	2000	2000	2000	2000	2000	2000	2000	2000	2000
Internal dimensions - mm									
width	600	600	600	600	600	600	600	600	600
depth	665	665	665	665	665	665	665	665	665
height	1480	1480	1480	1480	1480	1480	1470	1480	1480
Min/Max internal humidity - %	68	68	68	85	85	85	68	85	68
Door hinges	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side
N° and type of grids (included)	3, GN 2/1	3, GN 2/1	3, GN 2/1	3, GN 2/1	3, GN 2/1	3, GN 2/1	3, GN 2/1	4, GN 2/1	3, GN 2/1
N° defrost in 24 hrs.	4/30'	4/20'	4/20'	4	4	4	4/20'	4/20'	4/20'
Refrigerant type	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	130	130	130	140	140	140	130	190, 180	
Refrigeration power - W	663	663	663	523	523	523	663	523	743
Power - kW									
installed-electric	0.33	0.33	0.33	0.31	0.3	0.31	0.33	0.6	0.155
Internal light	●								
Net weight - kg.	126	126	126	126	126	126	126	139	126
Power supply - V, phases, Hz	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50
<b>INCLUDED ACCESSORIES</b>									
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	3	3	3	3	3	3			3
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.							3	4	
2/1 GN GREY "RILSAN" GRID	3	3	3	3	3	3	3	4	3
<b>ACCESSORIES</b>									
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456	881456	881456	881456	881456	881456			881456
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.							880557	880557	
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539	880539	880539	880539	880539	880539	880539
2/1 GN AISI 304 S/S GRID	881067	881067	881067	881067	881067	881067	881067	881067	881067
2/1 GN GREY "RILSAN" GRID	880720	880720	880720	880720	880720	880720	880720	880720	880720
ENERGY FREE ALARM DEVICE		881089	881089	881089	881089	881089	881089	881089	881089
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205	880205	880205	880205	880205
KIT TO FIT 11 PASTRY TRAYS (400X600 MM)	881031	881031	881031	881031	881031	881031	881031		881031
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451	881451		881451	881451			881451	881451
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457	881457	881457	881457	881457
REMOTE UNIT -2/+10°C FOR 550/650 L									881463


HAEA010

2009-11-09

Subject to change without notice

**Electrolux Benefit Cabinets**  
Digital refrigerators - 600 lt

726455, 726319, 726473, 726454, 726452, 728638, 726317

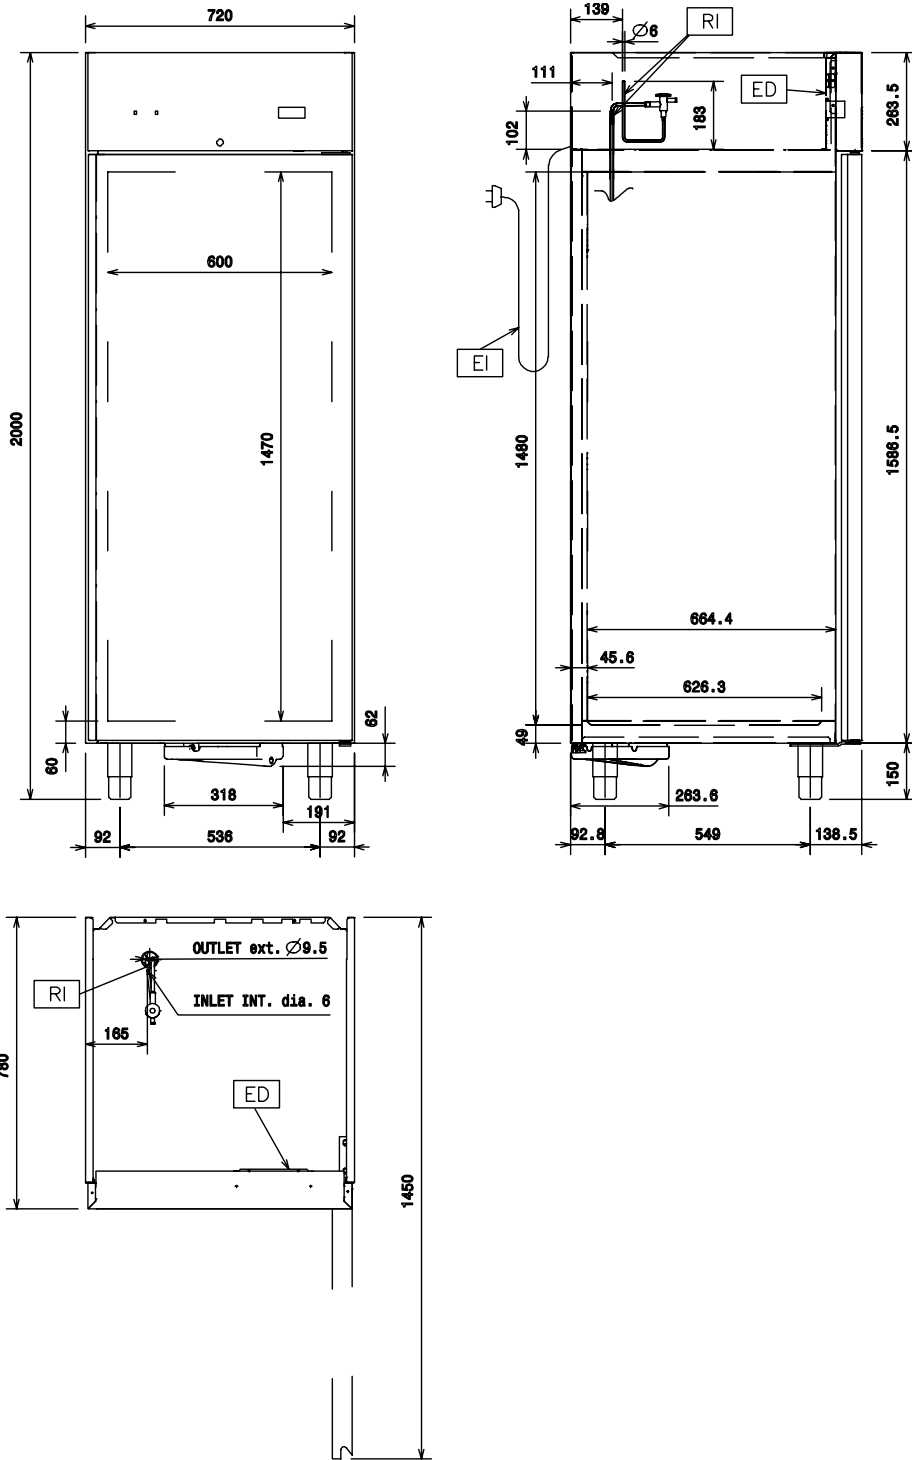

LEGEND	RS06NX1F 726455	RS06RX1F 726317	RS06N41F 728638	RS06PX1F 726452	RS06P41F 726454	RS06PW1F 726473	RS06DX2F 726319
EI - Electrical connection	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50


HAEA010

2009-11-09

Subject to change without notice

Electrolux Benefit Cabinets  
Digital refrigerators - 600 lt

726689

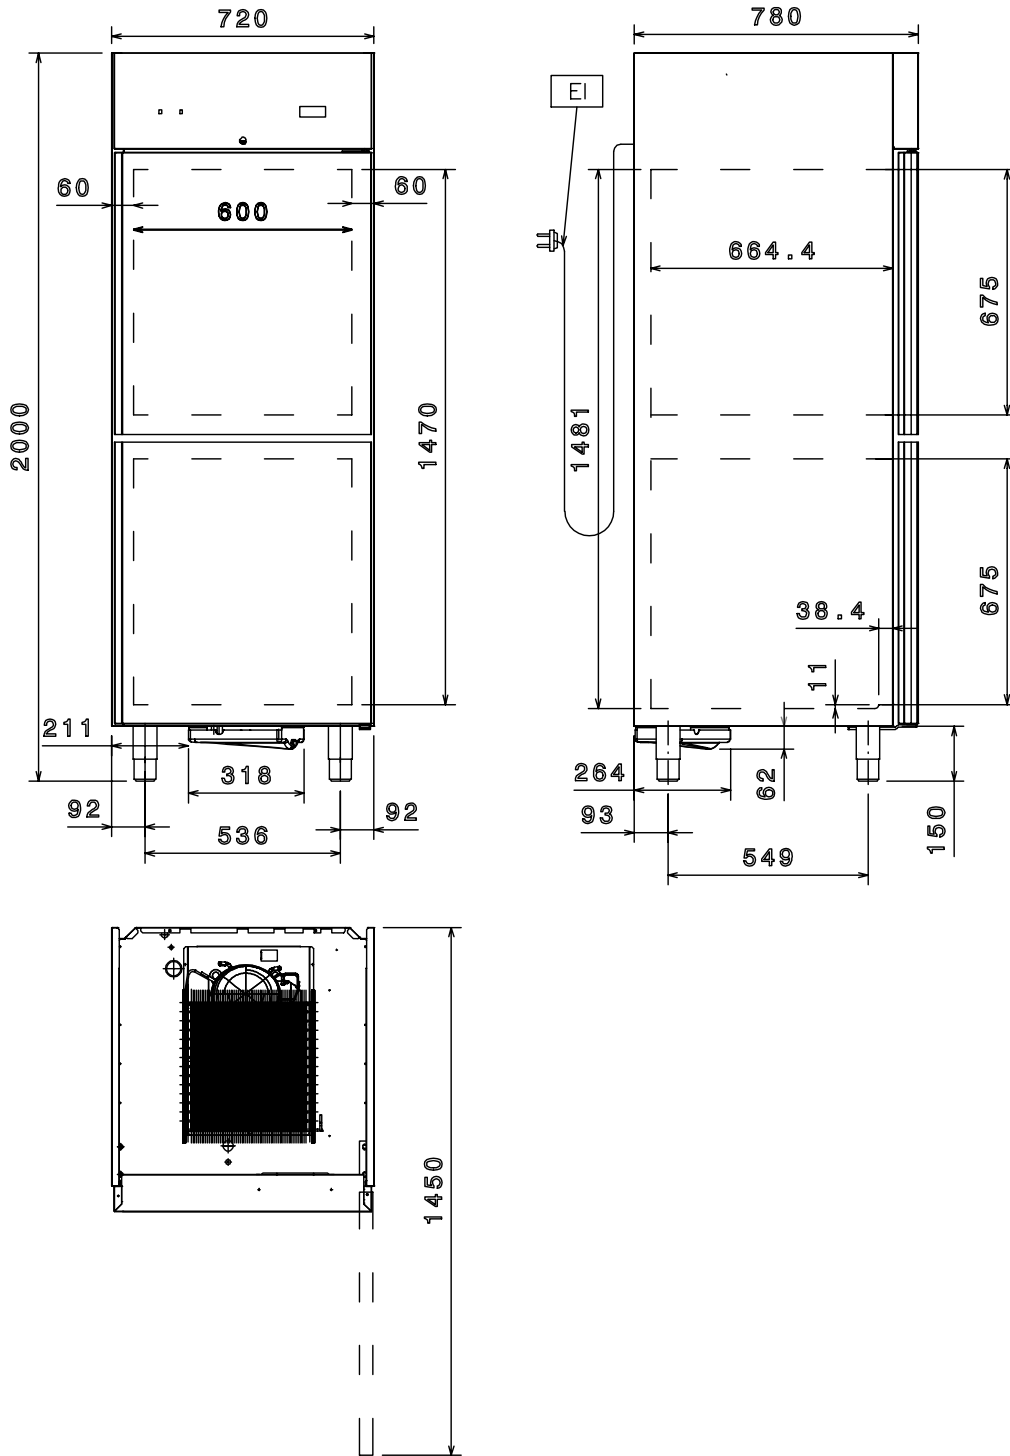

<b>LEGEND</b> EI - Electrical connection	RS06RX2H 726689
	230 V, 1, 50

HAEA010

2009-11-09

Subject to change without notice

