

Electrolux benefit counters

265 liter

The Electrolux range of benefit counters combines the convenience of worktop space with cold storage. The models detailed on this sheet are 265 liter counters with built-in refrigerating units and available with various combinations of doors and drawers.



726140

CONSTRUCTION

- Models RCSN2M2, RCSN2M2T, RCSN2M12 and RCSN2M2U have internal and external doors, front and side panels and 50mm thick removable worktop (except models without top) in 304 AISI stainless steel.
- Only on model RCSN2M24, internal and external structure, bottom, doors, front and side panels, base and 50mm thick removable worktop in stainless steel.
- External back panel in galvanized steel.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.

- Legs (150 mm high) in 304 AISI stainless steel with plastic interior and adjustable in height.
- CFC and HCFC free.
- All models comply with the standards required by the main international approval bodies and are H marked.

PERFORMANCES

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.

- Operating temperature: -2/+10°C.
- Refrigerant gas R404a.
- Possibility to install on socklet.
- Kit 1/2 drawers available as accessory.
- The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.



Electrolux

**Electrolux benefit counters
265 liter**

	RCSN2M2 726139	RCSN2M2T 726668	RCSN2M12 726140	RCSN2M2U 726182	RCSN2M24 727006
TECHNICAL DATA					
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	265	265	265	265	265
Cooling unit	Built-In	Built-In	Built-In	Built-In	Built-In
Control type	Digital	Digital	Digital	Digital	Digital
External dimensions - mm					
width	1238	1234	1238	1238	1238
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102	700, 1102
height	850	800	850	950	850
Worktop type	Stainless Steel	none	Stainless Steel	Stainless Steel with Splashback	Stainless Steel
Top material	304 AISI	Galvanized Steel	304 AISI	304 AISI	Stainless Steel
Min/Max internal humidity - %	55	55	55	55	55
N° of drawers			2x1/2		
Door hinges	1 Left+1 Right	1 Left+1 Right	Right Side	1 Left+1 Right	1 Left+1 Right
N° and type of grids (included)	2, GN 1/1	2, GN 1/1	1, GN 1/1	2, GN 1/1	2, GN 1/1
Compressor power - HP	1/4	1/4	1/4	1/4	1/4
N° defrost in 24 hrs.	every 6 hours	every 6 hours	every 6 hours	every 6 hours	every 6 hours
Refrigerant type	R404a	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	130	130	130	130	130
Refrigeration power - W	343	343	343	343	343
Refrigerant power					
at evaporation temperature - °C	-23	-23	-23	-23	-23
Power - kW					
installed-electric	0.34	0.34	0.34	0.34	0.34
Noise level - dBA	58.5	58.5	58.5	58.5	58.5
Net weight - kg.	119	114	126	120	119
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
No top		●			
Splashback			●		
INCLUDED ACCESSORIES					
1/1 GN GREY "RILSAN" GRID	2	2	1	2	2
ACCESSORIES					
KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES	880139	880139	880139	880139	880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS	880025	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF.TABLES	880046	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205
LOCK KIT	880024	880024	880024	880024	880024
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140		880140	880140	880140
STRUCTURE TO SUPPORT 3 GRIDS(RIGHT+LEFT)	880047	880047	880047	880047	880047
TWO ½ DRAWER KIT	880023	880023	880023	880023	880023


HBAD010

2009-10-06

Subject to change without notice

**Electrolux benefit counters
265 liter**

726139, 727006, 726182, 726140

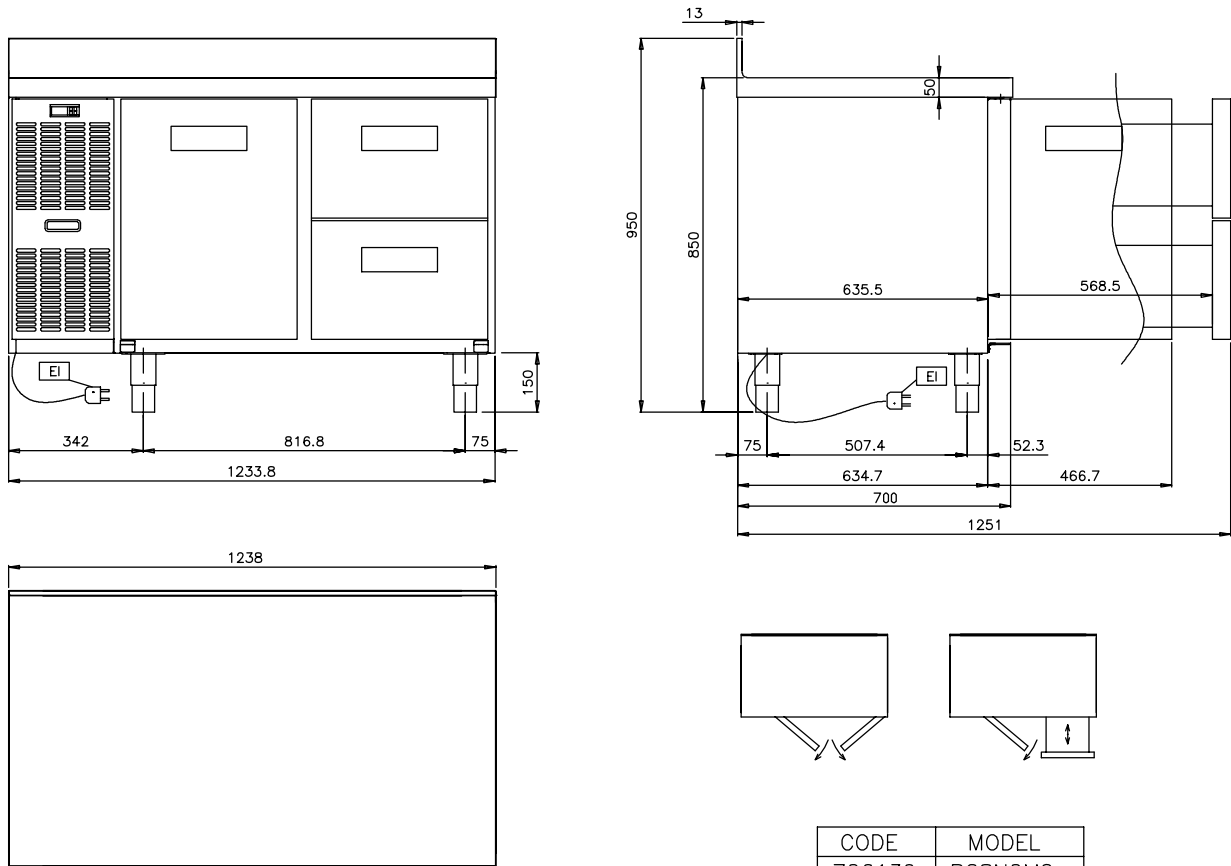

CODE	MODEL
726139	RCSN2M2
726140	RCSN2M12
726182	RCSN2M2U
727006	RCSN2M2

HBAD010



2009-10-06

Subject to change without notice

LEGEND	RCSN2M2 726139	RCSN2M12 726140	RCSN2M2U 726182	RCSN2M24 727006
	EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50

Electrolux benefit counters
265 liter

726668

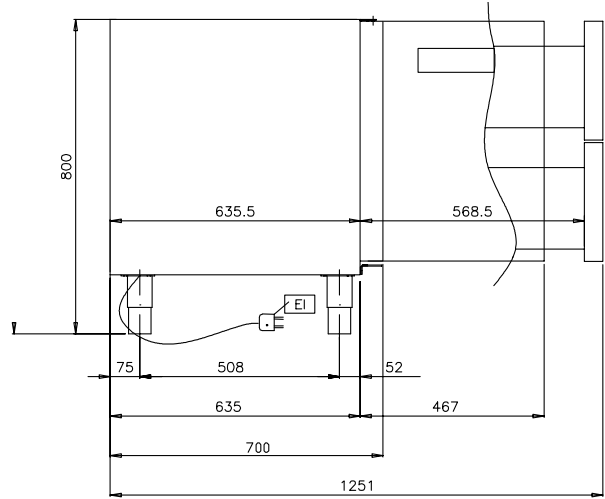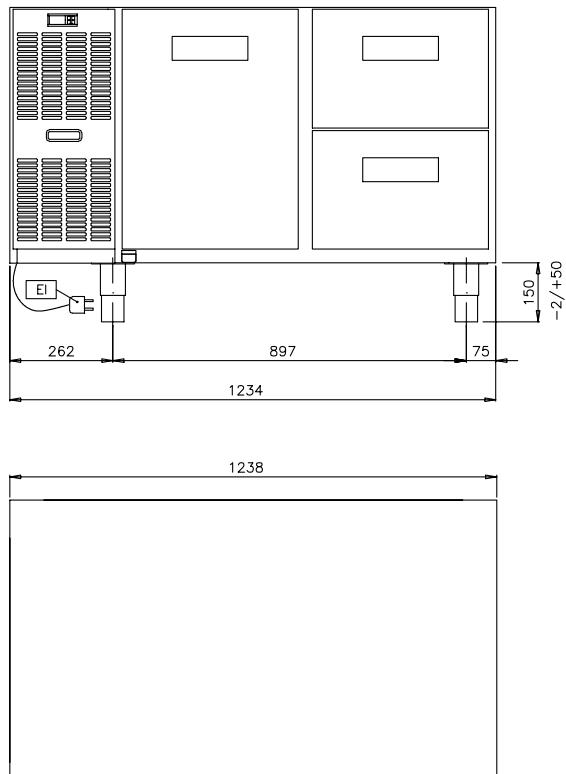

LEGEND EI - Electrical connection	RCSN2M2T 726668
	230 V, 1N, 50

HBAD010

2009-10-06

Subject to change without notice