

Electrolux HD-Line

Dual freezers/refrigerators - 650 lt

The Electrolux HD-Line offers one of the most comprehensive choices of refrigerated storage cabinets available. Manufactured internally and externally in 304 AISI stainless steel, operating over refrigeration or freezer temperature ranges, with solid or glass doors, and in a choice of either 650 litres or 1400 litres capacity. The 4 refrigerator and refrigerator/freezer models detailed on this leaflet have a capacity of 650 litres.



Model 728416

EASY TO INSTALL

- Mounted on adjustable stainless steel feet, with castors available as an option.
- Choice of doors to suit varying kitchen requirements.
- Refrigeration operating temperatures that can be adjusted from $-2\text{ }^{\circ}\text{C}$ to $+10\text{ }^{\circ}\text{C}$ to suit both meat and dairy storage requirements. Freezer temperature can be adjusted from $-15\text{ }^{\circ}\text{C}$ to $-24\text{ }^{\circ}\text{C}$.
- Suitable for ambient temperatures up to $+43\text{ }^{\circ}\text{C}$.

EASY TO CLEAN

- Constructed from the highest quality AISI 304 stainless steel with radiused corners to the interior base, which is pressed from a single sheet.

- Sides and back are formed from a single sheet of stainless steel to avoid dirt traps.
- Evaporator unit is inset into the top of the refrigerated chamber to provide an obstruction free interior.

EASY TO USE

- Forced air circulation for rapid cool down and even temperature uniformity.
- Accommodates GN 2/1 containers or shelves on anti-tilt runners.
- External digital temperature display.
- Interior light
- Lockable door.
- Refrigerators feature automatic defrost and are fitted with a defrost outlet pipe.

EASY TO MAINTAIN

- Heavy-duty construction that avoids use of any plastic parts.
- Two refrigeration units (compressor, condenser and evaporator) that can be removed in a single piece from either the top or back.
- Evaporator cover is easily removable for maintenance.


EASY ON THE ENVIRONMENT

- 20% reduction in energy consumption compared to previous models.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection.
- Refrigerants type: R134a and R404a.



Electrolux

728416, 728418, 728417

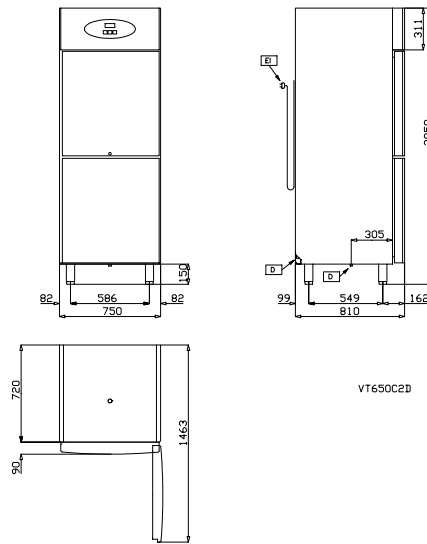

Electrolux HD-Line

	RH06DD2F 728416	RH06DD2FR 728417	RH06DFD2F 728418
LEGEND			
D - Water drain	1/2"	1/2"	
ED - Remote electrical connection		●	
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
RI - Remote refrigeration connection		●	
TECHNICAL DATA			
Operating temperature			
first compartment - min/max °C	-2 / 10	-2 / 10	-2 / 10
second compartment - min/max °C	-2 / 10	-2 / 10	-24 / -15
Operating mode	Ventilated	Ventilated	Ventilated
External material			
panels	304 AISI	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.	330, 330	330, 330	330, 330
Cooling unit	Built-In	Remote	Built-In
Control type	Digital	Digital	Digital
External dimensions - mm			
width	750	750	750
depth/with open doors	810, 1463	810, 1463	810, 1463
height	2050	2050	2050
Min/Max internal humidity - %	75/90; 75/90	75/90; 75/90	75/90; /
Door hinges	Right Side	Right Side	Right Side
N° and type of grids (included)	4, GN 2/1	4, GN 2/1	4, GN 2/1
Compressor power - HP	1/5		1/5
Second Unit - Compressor power -HP			1/2
N° defrost in 24 hrs.	4/20'	4/20'	4/20'
Second Unit - N° defrost in 24 hrs.			4/30'
Refrigerant type	R134a	R134a	R134a
Second Unit - Refrigerant type			R404a
Refrigerant quantity - g.	200, 160		200, 180
Refrigeration power - W	250		450
Second Unit - Refrigerant power - W			628
Refrigerant power			
at evaporation temperature - °C	-10	-10	-10
Power - kW			
installed-electric	0.66	0.63	0.825
Net weight - kg.	168	143	168
INCLUDED ACCESSORIES			
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	4	4	4
2/1 GN GREY "RILSAN" GRID	4	4	4
ACCESSORIES			
1/1 GN RILSAN STEEL WIRE BASKET H=150 MM	881043	881043	881043
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456	881456	881456
2/1 GN AISI 304 S/S GRID	881067	881067	881067
2/1 GN CHROME BASKET+2 RUNNERS H200	881468	881468	881468
2/1 GN GREY "RILSAN" GRID	880720	880720	880720
2/1 GN GREY RILSAN GRID W/ 2 RUNNERS	881454	881454	881454
2/1 GN PVC CONTAINER W/LID AND 2 RUNNERS	881462	881462	881462
4 SWIVELLING WHEELS (2 W/ BRAKE)	880178	880178	880178
GN 1/1 PLASTIC CONTAINER+FALSE BOTTOM	880705	880705	880705
GN 2/1 WIRE BASKET-H-150 MM+SIDE RUNNERS	881467	881467	881467
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133
KIT HACCP EKIS	922166	922166	922166
KIT PLINCH TO INSTALL HD REF. 550/650L	880206	880206	880206
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451	881451	881451
PERFORATED SHELF GN 2/1	881042	881042	881042
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457
REMOTE UNIT -2+10°C FOR 550/650 L		881463	
SET OF 8-1/1 GN PVC CONTAINERS FOR FISH	881461	881461	881461

Dual freezers/refrigerators - 650 lt

HAB030

2009-10-16

Subject to change without notice