

## 290 lt refrig. counters - upstand

The Electrolux range of refrigerated counters combines the convenience of worktop space with cold storage located below. This range of counters is constructed in 304 AISI stainless steel to meet the highest hygiene standards. The range is comprised of three sizes of counters, with built-in or remote compressor units, in various door or drawer configurations and in refrigerator or freezer versions. The models detailed on this sheet are refrigerated counters with two sections and operate with a temperature range of  $-2^{\circ}\text{C}$  to  $+10^{\circ}\text{C}$ .



726553

### EASY TO INSTALL

- Mounted on legs with height adjustment.
- Built-in compressor to suit operating conditions.
- Suitable for use in ambient temperatures of up to  $43^{\circ}\text{C}$ .

### EASY TO CLEAN

- Constructed in 304 AISI stainless steel to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on stainless steel legs to provide 150 mm clearance for easy floor cleaning.
- Worktop fitted with rounded edge on models RCDR2M20UX and RCDR2M12X.

### EASY TO USE

- Adjustable temperature range from  $-2^{\circ}\text{C}$  to  $+10^{\circ}\text{C}$  to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Worktop in 304 AISI stainless steel 50 mm in thickness.
- Integrated rear upstand.

### EASY TO MAINTAIN

- Access to all components from the front.

### EASY ON THE ENVIRONMENT

- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).
- 60 mm insulation thickness for energy saving.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models comply with the standards required by the main international approval bodies and are H marked.



**Electrolux**

**Electrolux HD-Line  
290 lt refrig. counters - upstand**

	<b>RCDR2M20U 726553</b>	<b>RCDR2M12U 726554</b>	<b>RCDR2M04U 726555</b>	<b>RCDR2M13U 727076</b>
<b>TECHNICAL DATA</b>				
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	291	291	291	291
Cooling unit	Built-In	Built-In	Built-In	Built-In
External dimensions - mm				
width	1274	1274	1274	1274
depth/with open doors	700, 1110	700, 1110	700, 1110	700, 1110
height	950	950	950	1000
Worktop type	Stainless Steel with Splashback	Stainless Steel with Splashback	Stainless Steel with Splashback	Stainless Steel with Splashback
Top material	304 AISI	304 AISI	304 AISI	304 AISI
Min/Max internal humidity - %	80/95	80/95	80/95	80/95
N° of drawers		2x1/2	4x1/2	3x1/3
Door hinges	1 Left+1 Right	Right Side		Left
N° and type of grids (included)	2, GN 1/1	1, GN 1/1		1, GN 1/1
Compressor power - HP	1/4	1/4	1/4	1/4
N° defrost in 24 hrs.	3/15'	3/15'	3/15'	3/15'
Refrigerant type	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	220	220	220	220
Refrigeration power - W	378	378	378	378
Refrigerant power				
at evaporation temperature - °C	-10	-10	-10	-10
Power - kW				
installed-electric	0.34	0.34	0.34	0.34
Net weight - kg.	120	127	136	120
<b>INCLUDED ACCESSORIES</b>				
1/1 GN GREY "RILSAN" GRID	2	1		1
<b>ACCESSORIES</b>				
1/1 GN GREY "RILSAN" GRID	881435	881435	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539	880539
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133	880133
KIT 1 BOTTLER+1 DRAWER FOR REFR.COUNTER		881516	881516	881516
KIT 1 DOOR FOR REFRIGER.COUNTER		881517	881517	881517
KIT 2 DRAWERS 1/2+RACK-HD REF.COUNTERS		881514	881514	881514
KIT 3 DRAWERS 1/3+RACK-HD REF.COUNTERS		881515	881515	881515
KIT HACCP EKIS	922166	922166	922166	922166
LOCK FOR REFRIGERATED COUNTERS	881499	881499	881499	881499
PLASTIC CONTAINER GN 1/1 H=100 MM		811451	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457


HBAB020

2009-10-22

Subject to change without notice

**Electrolux HD-Line  
290 lt refrig. counters - upstand**

726553, 726555, 726554

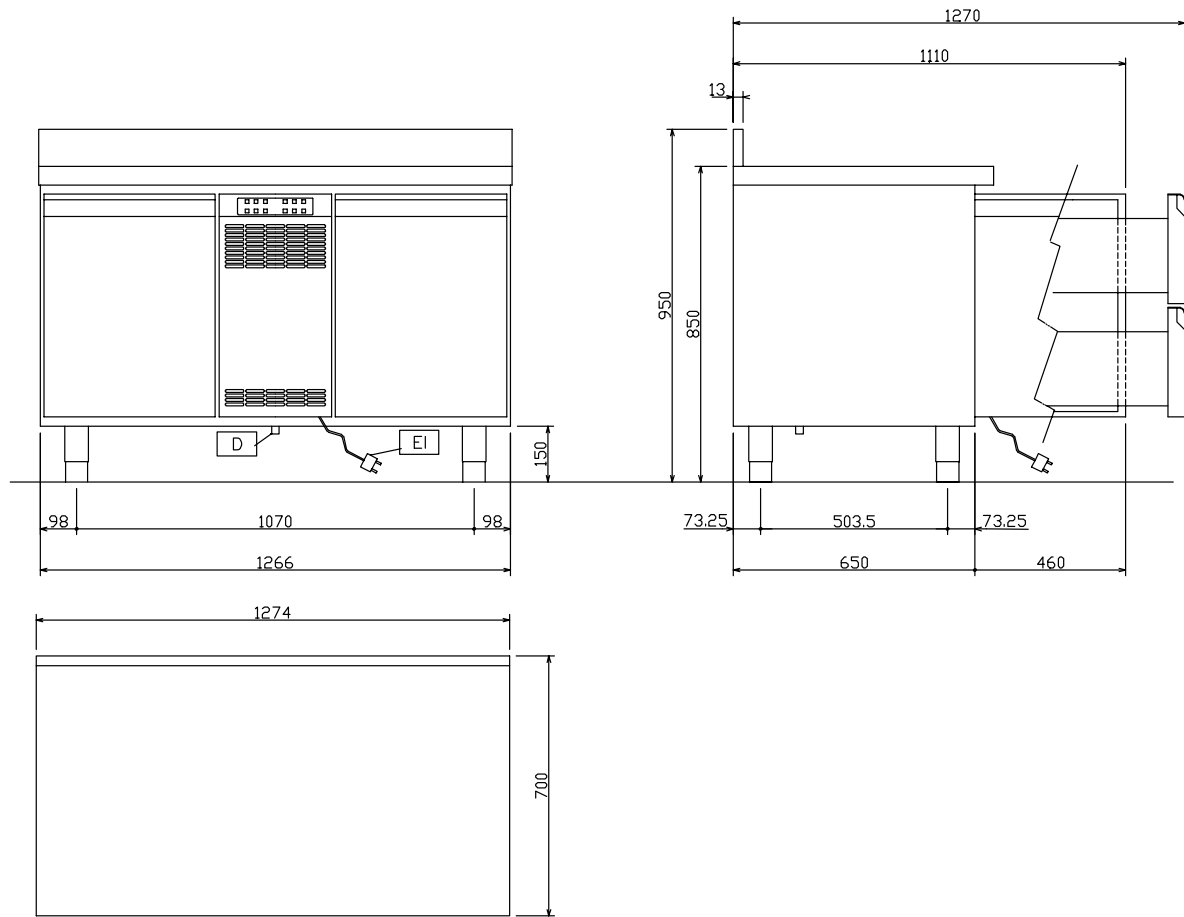

HBAB020

2009-10-22

LEGEND	RCDR2M20U 726553	RCDR2M12U 726554	RCDR2M04U 726555
	D - Water drain	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50

Subject to change without notice