

590 l refrigerated counters

The Electrolux range of refrigerated counters combines the convenience of worktop space with cold storage located below. This range of counters is constructed in 304 AISI stainless steel to meet the highest hygiene standards. The range is comprised of three sizes of counters, with built-in or remote compressor units, in various door or drawer configurations and in refrigerator or freezer versions. The models detailed on this sheet are refrigerated counters with 4 sections and operate at a temperature range of -2°C to $+10^{\circ}\text{C}$.



726572

EASY TO INSTALL

- Mounted on legs with height adjustment.
- Built-in or remote compressor to suit operating conditions.
- Suitable for use in ambient temperatures of up to 43°C .

EASY TO CLEAN

- Constructed in 304 AISI stainless steel to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on stainless steel legs to provide 150 mm clearance for easy floor cleaning.

EASY TO USE

- Adjustable temperature range from -2°C to $+10^{\circ}\text{C}$ to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Worktop in 304 AISI stainless steel 50 mm in thickness.

EASY TO MAINTAIN

- Access to all components from the front.

EASY ON THE ENVIRONMENT

- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).
- 60 mm insulation thickness for energy saving.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models comply with the standards required by the main international approval bodies and are H marked.



Electrolux

**Electrolux HD-Line
590 lt refrigerated counters**

	RCDR4M40 726571	RCDR4M32 726572	RCDR4M40R 726575	RCDR4M32R 726576	RCDR4M24 726199	RCDR4M16 726200	RCDR4M08 726201	RCDR4M40T 727082	RCDR4M33T 727083	RCDR4M26T 727085
TECHNICAL DATA										
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	590	590	590	590	590	590	590	590	590	590
Cooling unit	Built-In	Built-In	Remote	Remote	Built-In	Built-In	Built-In	Built-In	Built-In	Built-In
External dimensions - mm										
width	2244	2244	2244	2244	2244	2244	2244	2244	2244	2244
depth/with open doors	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110
height	850	850	850	850	850	850	850	800	850	800
Worktop type	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	none	none	none
Top material	304 AISI	304 AISI	304 AISI	304 AISI	304 AISI	304 AISI	304 AISI			
Min/Max internal humidity - %	80/95	80/95	80/95	80/95	80/95	80/95	80/95	80/95	80/95	80/95
N° of drawers	2	2	2	2	4	6	8		3x1/3	6x1/3
Door hinges	2 Left+2 Right	2 Left+1 Right	2 Left+2 Right	2 Left+1 Right	2 Left+1 Right	2 Left+1 Right	2 Left+1 Right	2 Left+1 Right	2 Left+1 Right	Left
N° and type of grids (included)	4, GN 1/1	3, GN 1/1	4, GN 1/1	3, GN 1/1	3, GN 1/1	3, GN 1/1		4, GN 1/1	3, GN 1/1	2, GN 1/1
Compressor power - HP	1/4	1/4			1/4	1/4	1/4	1/4	1/4	1/4
N° defrost in 24 hrs.	3/15'	3/15'	3/15'	3/15'	3/15'	3/15'	3/15'	3/15'	3/15'	3/15'
Refrigerant type	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	290	290			290	290	290	290	290	290
Refrigeration power - W	378	378			378	378	378	378	378	378
Refrigerant power										
at evaporation temperature - °C	-10	-10	-10	-10	-10	-10	-10	-10	-10	-10
Power - kW										
installed-electric	0,38	0,38	0,038	0,038	0,38	0,38	0,38	0,38	0,38	0,38
Net weight - kg.	186	194	174	182	196	198	200	186	186	186
INCLUDED ACCESSORIES										
1/1 GN GREY "RILSAN" GRID	4	3	4	3	2	1		4	3	2
ACCESSORIES										
1/1 GN GREY "RILSAN" GRID	881435	881435	881435	881435	881435	881435	881435	881435	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG. TABLES	880539	880539	880539	880539	880539	880539	880539	880539	880539	880539
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119	880119	880119	880119	880119	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132	880132	880132	880132	880132	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133	880133	880133	880133	880133	880133	880133	880133
KIT 1 BOTTLER-1 DRAWER FOR REFR.COUNTER	881516	881516	881516	881516	881516	881516	881516	881516	881516	881516
KIT 1 DOOR FOR REFRIGER.COUNTER	881517	881517	881517	881517	881517	881517	881517	881517	881517	881517
KIT 2 DRAWERS 1/2+PACK-HD REF.COUNTERS	881514	881514	881514	881514	881514	881514	881514	881514	881514	881514
KIT 3 DRAWERS 1/3+PACK-HD REF.COUNTERS	881515	881515	881515	881515	881515	881515	881515	881515	881515	881515
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166	922166	922166	922166	922166
LOCK FOR REFRIGERATED COUNTERS	881499	881499	881499	881499	881499	881499	881499	881499	881499	881499
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451	811451	811451	811451	811451	811451	811451	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040	881040	881040	881040	881040	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038	881038	881038	881038	881038	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457	881457	881457	881457	881457	881457
REMOTE UNIT -2+10°C FOR 550/650 L			881463	881463						
WORKTOP FOR REFR.COUNTER-4 COMPARTMENTS								880258	880258	880258
WORKTOP+UPSTAND FOR REF.COUNTER-4 COMP.								880261	880261	880261


HBAB070

2009-10-21

Subject to change without notice

**Electrolux HD-Line
590 lt refrigerated counters**

726571, 726576, 726575, 726572

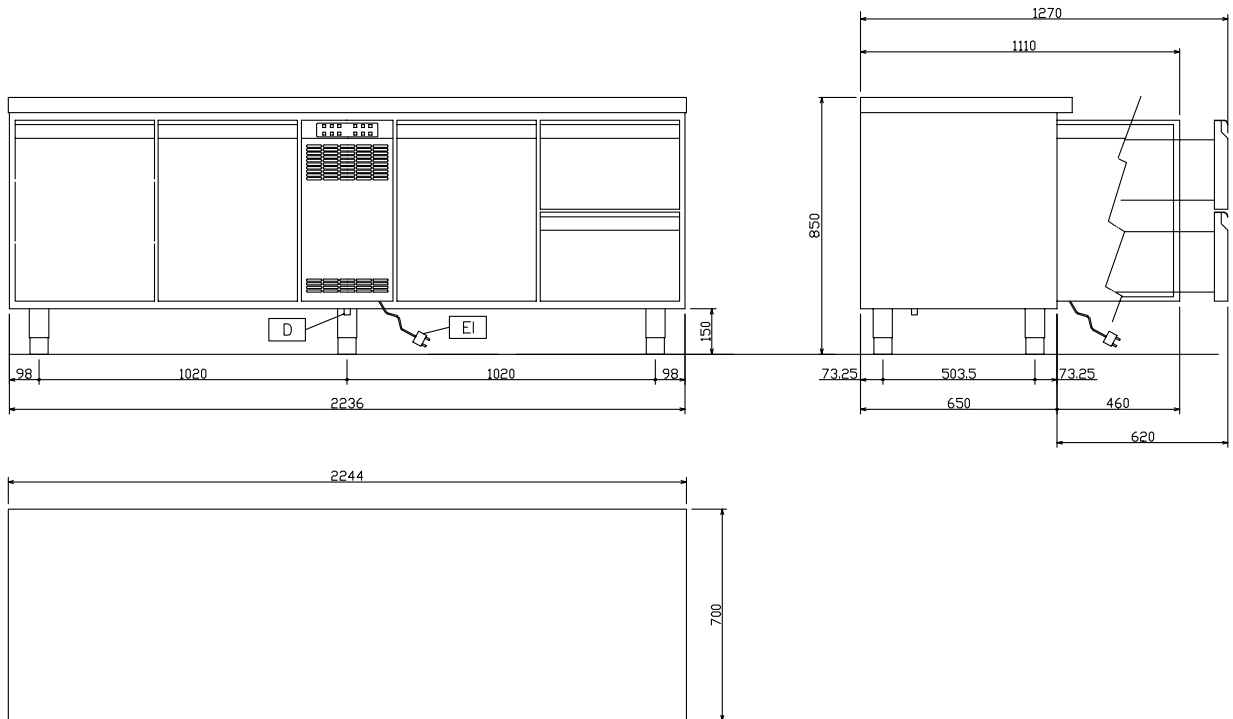

HBAB070

2009-10-21

Subject to change without notice

LEGEND	RCDR4M40 726571	RCDR4M32 726572	RCDR4M40R 726575	RCDR4M32R 726576
D - Water drain	16mm	16mm	16mm	16mm
ED - Remote electrical connection			●	●
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50