

Under-Counter Refrigerator Drawers

EI24RD65HS

Featuring IQ-Touch^{MC} Electronic Controls



Perfect Set[®] Temperature Control

Set a temperature anywhere between 34 and 45 degrees — the Refrigerator Drawers will hold it to within one degree of variance.



Luxury-Glide[®] System

Opening or closing a drawer is smooth and easy — all it takes is the touch of a finger.



Luxury-Design[®] Lighting

Our ramp-up designer LED lighting is as beautiful as it is functional.



Large Capacity

Even large enough for two-litre bottles and large serving trays.

24" FRESH FOOD REFRIGERATOR DRAWER

ENERGY STAR [®]	Yes
Sabbath Mode (Star-K [®] Certified)	Yes
Capacity	6.0 Cu. Ft.
Configuration	2 Drawers
Installation Type	Built In

Features

IQ-Touch [™] Electronic Controls	Yes
Fully Integrated Control Panel	Yes
Blue LED Display	Yes
Luxury-Glide [®] Full-Extension Self-Closing Drawers	Yes
Luxury-Design [®] Lighting	Yes
Perfect Set [®] Controls	Yes
PureAdvantage [®] Air Filtration	Yes
Electronic Control Lock	Yes
Display Temp Mode (°C or °F)	Yes
Door Ajar Acoustic Alarm	Yes
High-Temperature Acoustic Alarm	Yes
Power Failure Acoustic Alarm	Yes
Mute Sound Control	Yes
Power-On/Off Control	Yes
Vacation Mode	Yes
Sabbath Mode (Star-K [®] Certified)	Yes
Holds 12" Bottle (Upper and Lower Drawer)	Yes
Storage Shelf (Lower Drawer)	Yes
Frost-Free Performance	Yes
Dynamic Condenser	Yes

Additional Features

Signature Soft-Arc Drawer Front and Handle Design	Yes
Adjustable Leveling Legs	4

Accessories

Storage Pans	Optional
Adjustable Slide-and-Divide Divider (Upper Drawer)	Optional

Colour / UPC (0-12505-)

Stainless Steel (S)	67365-8
---------------------	---------

Specifications


Cavity Dimensions –	
Height (Upper Drawer)	12-3/64"
Height (Lower Drawer)	12-3/16"
Width	18-1/16"
Depth	18-9/32"
Product Dimensions –	
Height	34" – 35"
Width	23-13/16"
Depth (to Center of Arc)	24-1/4"
Depth (Fully Extended Including Handle)	42-3/4"
Temperature Range	34° F - 45° F
Electrical Cable	Yes
Power Supply Connection Location	Right Bottom Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts [†]	0.16
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	150 Lbs.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxappliances.ca. Specifications subject to change.



Under-Counter Refrigerator Drawers

EI24RD65HS

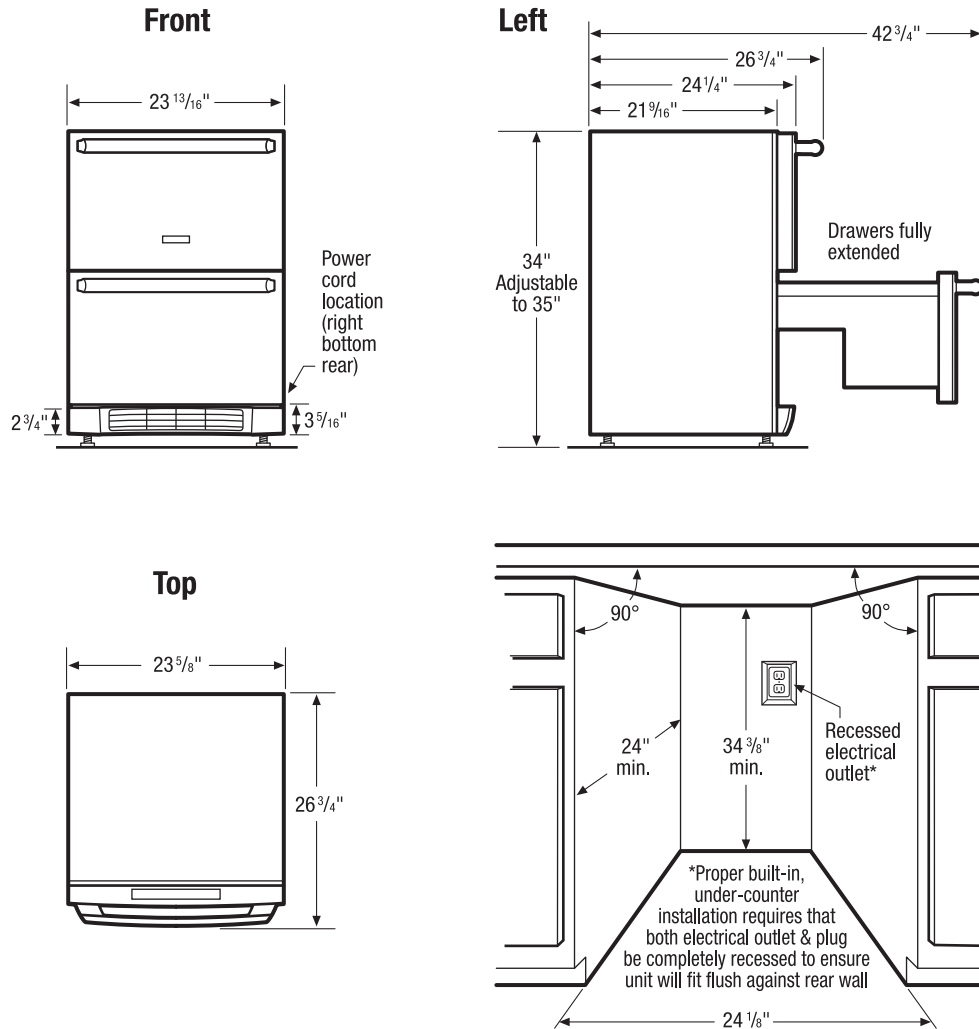

Refrigerator Drawer Specifications

- Product Weight – 128 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- Electrical cable supplied.
- Always consult local and/or national electric codes.
- Can be used freestanding, or built-in under counter.
- Does not require additional airspace for top, sides or rear when used in built-in application. Increase unit dimensions by at least 1/4" for recommended rough opening.
- Front grille MUST remain unobstructed for proper ventilation.
- Must be positioned on flat, level surface, capable of supporting entire weight when fully loaded.

- Leveling legs supplied to adjust height and level unit.
- Do not position unit near any heat source to ensure optimum performance.
- Allow 18" minimum for handle clearance with drawers fully extended.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca or supplied with product for detailed instructions.

Electrolux Major Appliances, N.A.

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EI24RD65HS 03/11

© 2011 Electrolux Major Appliances, NA



High standards of quality at Electrolux Major Appliances mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Printed in Canada