



ATMC-D SERIES

Air-Thru Dual Access Milk Coolers



Features the lowest entry point in the industry allowing easier access for small children and for stocking product

MODELS

- ATMC-84DSS
- ATMC-124DSS
- ATMC-164DSS

ATMC-124DSS

FEATURES

CONSTRUCTION

- Dual access
- Stainless steel interior and exterior
- Cabinet is insulated with foamed-in-place polyurethane
- Four easy roll swivel casters, two locking
- Epoxy-coated heavy-duty floor racks
- NSF-listed drain
- NSF-listed thermometer

DOOR

- Door is insulated and has gaskets
- Chrome-plated hinges

- Fold-back door locks to safely stay open during use
- Key locks

REFRIGERATION

- Air-thru evaporator
- Self-contained design
- Refrigerant: R-134a
- Easily accessed modular refrigeration system flush mounted on side of cooler with all components outside the milk storage compartment
- Large cooling capacity to maintain the required storage temperature

- Condensate evaporator
- Operating temperature: 38°F (3°C)

WARRANTY

- Standard limited one year compressor, 18 month labor and one year limited parts

CAPACITY

| MODEL | CASES WITH CARTONS | | | | LOOSE CARTON (WITHOUT CASES) | |
|-------------|--------------------|---------|------------------|---------|------------------------------|--------|
| | 13" x 13" x 11"H | | 19" x 13" x 11"H | | 1/2 PINT | 1 PINT |
| | CASES | CARTONS | CASES | CARTONS | | |
| ATMC-84DSS | 8 | 352 | 4 | 288 | 864 | 432 |
| ATMC-124DSS | 12 | 528 | 8 | 576 | 1368 | 684 |
| ATMC-164DSS | 16 | 704 | 12 | 864 | 1800 | 900 |

OPTIONS

- Extended four year compressor warranty




ATMC-D SERIES

AIR-THRU DUAL ACCESS MILK COOLERS


TECHNICAL SPECIFICATIONS

| MODEL | DIMENSIONS (in.) | | | DIMENSIONS (mm) | | | VOLTS | AMPS | UNIT H.P. | NO. OF FLOOR RACKS | CAP. CU. FT. | SHIP CU. FT. | SHIP WT. (LB/KG) |
|-------------|------------------|--------------------------------|----|-----------------|-----|-----|-------|------|-----------|--------------------|--------------|--------------|------------------|
| | L | D | H* | L | D | H* | | | | | | | |
| ATMC-84DSS | 47 | 34 ¹ / ₈ | 37 | 1194 | 845 | 940 | 115 | 7.1 | 1/3 | 2 | 13.0 | 43.3 | 250/114 |
| ATMC-124DSS | 61 | 34 ¹ / ₈ | 37 | 1549 | 845 | 940 | 115 | 7.1 | 1/3 | 3 | 19.9 | 55.1 | 300/136 |
| ATMC-164DSS | 75 | 34 ¹ / ₈ | 37 | 1905 | 845 | 940 | 115 | 7.1 | 1/3 | 4 | 25.6 | 67.1 | 350/159 |


*Height includes casters.

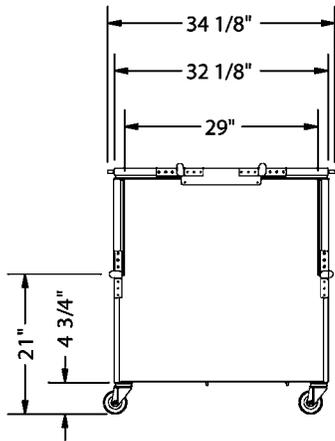


SIDE VIEW - ALL

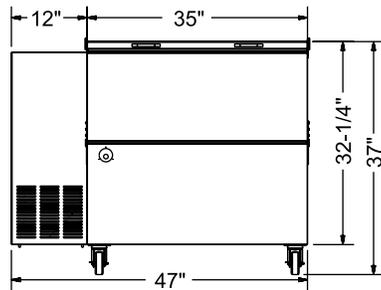

ATMC-82D ELEVATION VIEW

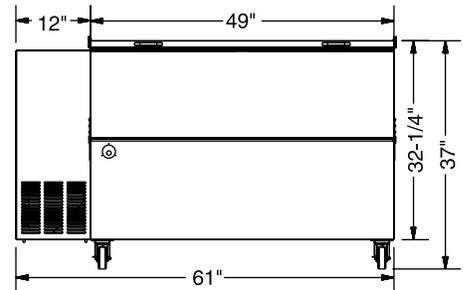

ATMC-122D ELEVATION VIEW

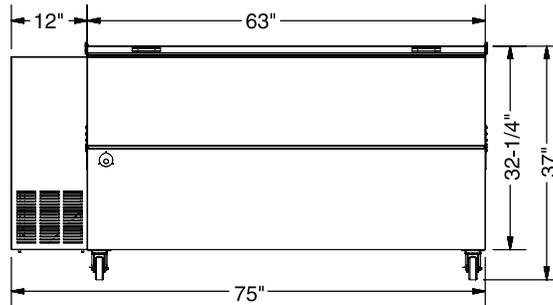

ATMC-162D ELEVATION VIEW

LISTINGS



HOOKUP

Via plug in, 8 foot long flexible three wire 16/3 cord with molded plug.



BID SPECIFICATIONS

Item no. ATMC- _____DSS
Provide _____ () Air-Thru Dual Access Milk Cooler(s), Master-Bilt model no. ATMC- _____DSS.

Milk cooler to be constructed of stainless steel on both interior and exterior and will be insulated with foamed-in-place polyurethane. It will be equipped with four swivel casters, two of which will be locking. Epoxy-coated heavy-duty floor

racks will also be standard as will an NSF-listed drain and thermometer.

Doors to be insulated and will have gaskets and chrome-plated hinges. In addition, doors will fold back and lock to safely stay open during use and will feature key locks.

The refrigeration system will feature an exclusive air-thru, self-contained design and will have a condensate evaporator.

The system will be a modular type flush mounted on side of cooler with all components outside the milk storage compartment. The refrigerant will be R-134a and the operating temperature will be 38°F (3°C).

Cooler to have standard limited one year compressor, 18 month labor and one year limited parts warranty.

Cooler to be UL and C-UL listed and UL EPH classified.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

