

Bluetooth StageUser Manual



Dear User.

Thank you for purchasing BRIK Bluetooth Stage.

Please read this User Manual before operating the machine to ensure its best performance and your safety.

Instructions:

Installing Antenna

• Put the antenna into the socket on the rear panel and rotate the antenna clockwise until contacting bearing. Turn the antenna to a vertical position.

Connecting Amplifier / D-A Converter


- Connect the Analog Output socket to a line input on an amplifier.
- Connect the Digital Output socket to a coaxial input on a digital-analog converter.
- Use Output switch on the front panel to choose the output function.

Connecting Power

- Before connecting, check the label to ensure the local power supply is compliant, and then connect the low voltage plug from the power supply to the 12V In socket and switch the machine on.
- Only use approved BRIK power supply. The use of other adaptors or supplies could seriously damage this item.

Pairing Bluetooth

- Access the Bluetooth menu of your audio device (PC, Mobile Phone, MP3 Player, etc.) that supports the A2DP format, turn on Bluetooth function, and make a Bluetooth search.
- Once the Bluetooth search is complete, please select BRIK from the list of available devices and enter password/pin code 0000. Now, the Bluetooth Stage is being successfully paired to your audio device and will start functioning once the music is played. The LED indicator will be on when the Bluetooth Stage is being paired and will be off when it is no longer being paired.
- Please stop pairing first, change the **Output** selection, and then pair bluetooth again to complete the output selection changing process.

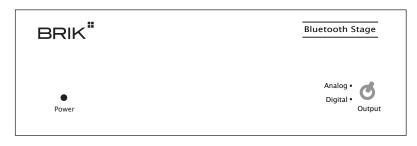

Specifications:

OUTPUT SELECTION

AUDIO FUNCTION FRENQUENCY RESPONSE S/N THD CROSSTALK **OUTPUT LEVEL**

AVAILABLE DISTANCE DIMENSION WFIGHT

Analog Digital - Coaxial 44.1K & 48K 16 Bit Stereo 40 Hz ~ 15K Hz

> 70 dB < 0.1 % > 55 dB

2V rms ±0.2V 50M Maximum

W 140 x H 48 x D160 mm


1000 a

NOTE

- BRIK Bluetooth Stage operates in accordance with its specifications within environment temperature 40 degrees Celsius.

WARNING

- Never open the case of this item as this will invalidate the guarantee. There are no user adjustments inside. Please refer all service work to an authorized BRIK agent.
- This item shall not be exposed to dripping or splashing liquid, and that no objects filled with liquids, such as vases, shall be placed on the apparatus.

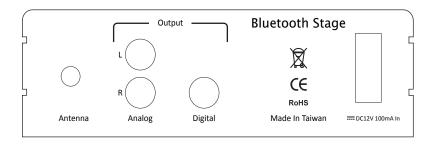



CE X RoHS

The information was correct at the time of going to press. The manufacturer reserves the rights to make changes to the technical specification without prior notice.

The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons releases the manufacturer from any liability over and above the lawful rights of the customer.