


NetTalk Phone Adaptor Installation Guide


1.	To install the DIY programme	2
2.	To open the NetTalk Telephony Service Welcome page.....	3
3.	To select actions in Main page	3
4.	To install the NetTalk Phone Adaptor	4
4.1.	Step 1.....	4
4.2.	Step 2.....	4
4.3.	Step 3.....	5
4.4.	Step 4.....	5
4.5.	Step 5.....	6
4.6.	Step 6.....	6
4.6.1.	PPPoE Settings	6
4.6.2.	DHCP Settings	7
4.6.3.	Fixed IP Settings	8
4.7.	Step 7.....	8
4.8.	Exit the setup programme	9
4.9.	To install your Broadband/Wireless router	9
5.	To test your NetTalk Phone Adaptor	10

1. To install the DIY programme

- Download the setup file <http://www.newworldtel.com/telephony/download/>
- Run the Setup file to install the NetTalk DIY programme in your PC

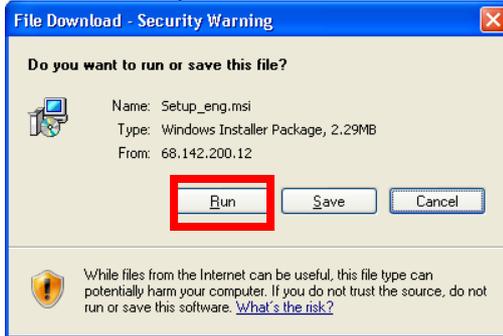

- Simply follow the below steps to complete the installation

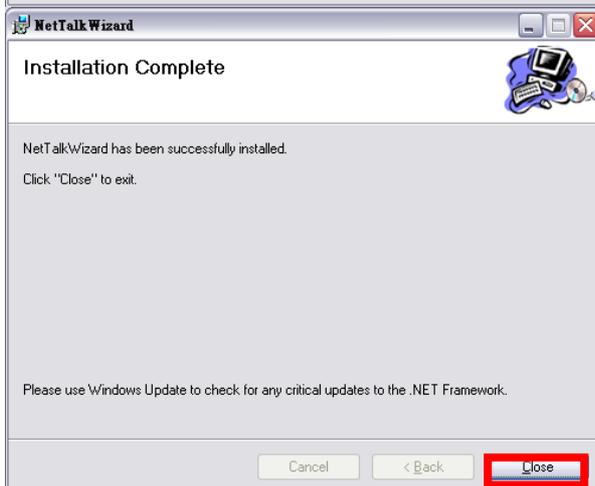


2. To open the NetTalk Telephony Service Welcome page

- Double click the  DIY icon to start
- Select the user language in the welcome page
- Choose the display language and click "Next" to continue



3. To select actions in Main page

- To install the NetTalk Phone Adaptor, click the "Install" button
- To check the NetTalk Phone Adaptor, click the "Diagnosis" button
- To read user manual, click "Read User Manual"
- To install Acrobat Reader, click "install Acrobat Reader"
- To seek technical support, click "Technical support"
- To go back to language selection, click the "Home" button
- To exit the setup programme, click the "Exit" button

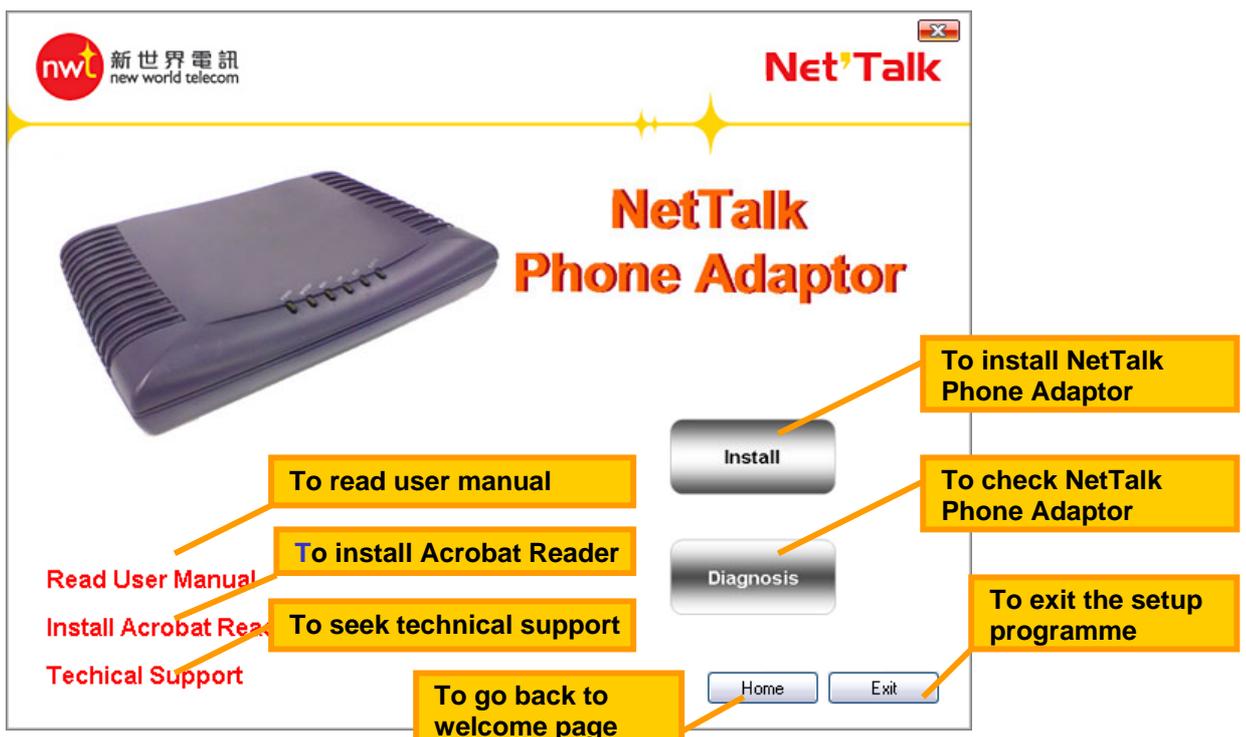

4. To install the NetTalk Phone Adaptor

4.1. Step 1

Disconnect the LAN cable connecting to PC and leave the modem aside temporarily and then click "Next" to go to continue

The screenshot shows the NetTalk software interface. At the top left is the nwt logo with the text "新世界電訊 new world telecom". At the top right is the "NetTalk" logo. A yellow box highlights the instruction: "Step 1: Disconnect the LAN cable connecting to PC and leave your modem aside temporarily." Below this, a diagram shows a PC with a blue LAN cable connected to a modem. A yellow arrow points to the right, where the PC and modem are shown without the cable connected. A yellow callout box points to the "Next" button with the text "Click 'Next' to continue". A "Remark:" section states: "If you are currently using a Broadband or Wireless router. Please disconnect it now and follow the last step to reconnect it." At the bottom are "Back", "Next", and "Cancel" buttons, with "Next" highlighted by a yellow box.


4.2. Step 2

Connect the power cable to the NetTalk Phone Adaptor and then plug in the power adaptor to a power socket and then click "Next" to continue

The screenshot shows the NetTalk software interface. At the top left is the nwt logo with the text "新世界電訊 new world telecom". At the top right is the "NetTalk" logo. A yellow box highlights the instruction: "Step 2: Connect the power cable to the NetTalk Phone Adaptor and then plug in the power adaptor to a power socket". Below this, a diagram shows a PC connected to a NetTalk Phone Adaptor. A yellow arrow points to the right, where the Phone Adaptor is shown with a power cable plugged into it. A callout box points to the power LED on the front panel of the adaptor, stating: "The Power's LED in the front panel will be ON". A yellow callout box points to the "Next" button with the text "Click 'Next' to continue". At the bottom are "Back", "Next", and "Cancel" buttons, with "Next" highlighted by a yellow box.


4.3. Step 3

Connect a LAN cable to the LAN port of the NetTalk Phone Adaptor and the LAN port of your PC and then click "Next to continue

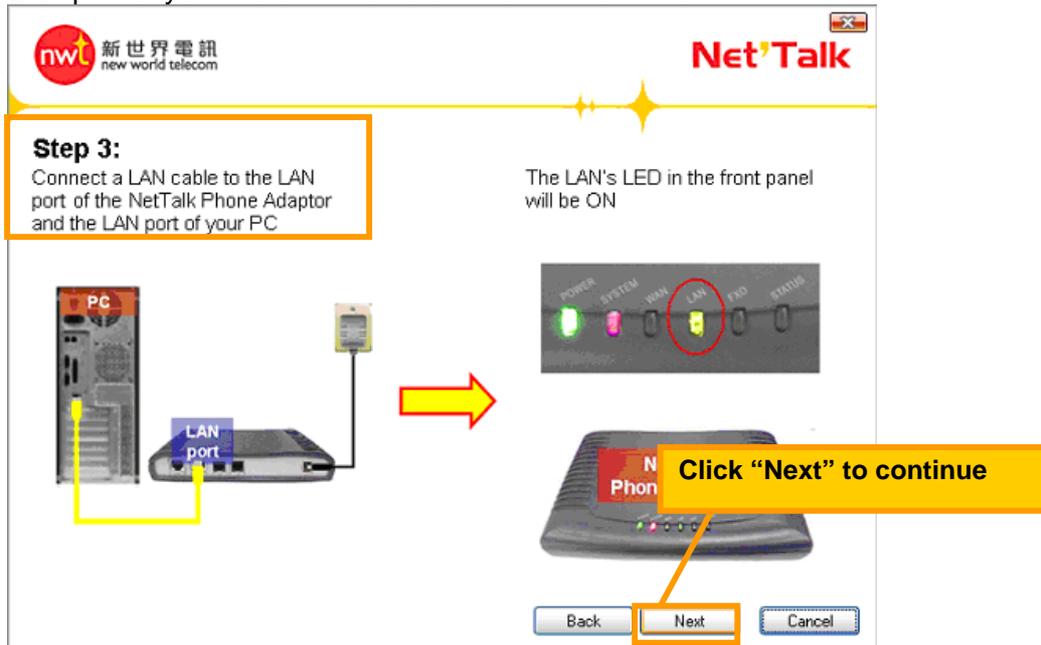


4.4. Step 4

Reconnect the LAN cable from your modem to the WAN port of the NetTalk Phone Adaptor and then click "Next" to continue

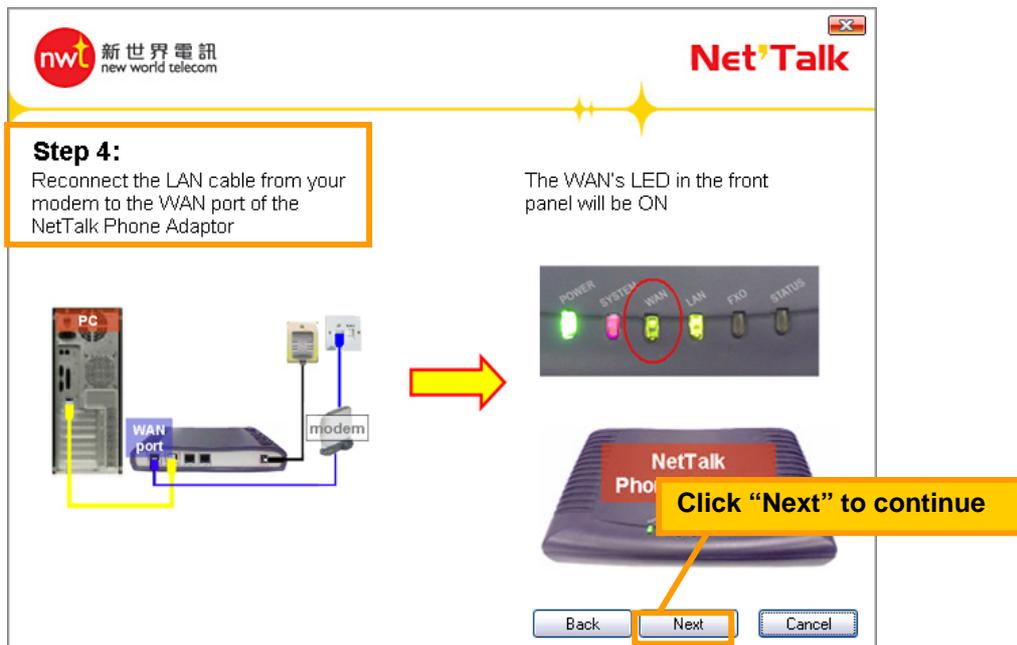

4.5. Step 5

Select the connection method provided by your service provider and then click "Next" to continue

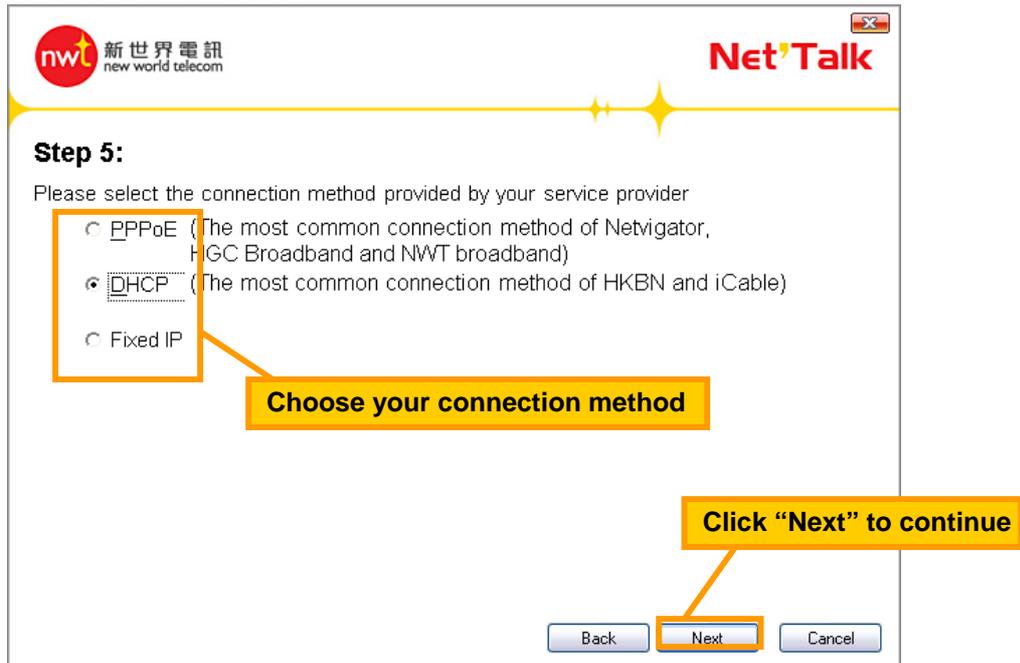


The screenshot shows the NetTalk interface for Step 5. At the top left is the NWT logo (新世界電訊 new world telecom) and at the top right is the NetTalk logo. The main heading is "Step 5:" followed by the instruction "Please select the connection method provided by your service provider". There are three radio button options: "PPPoE (The most common connection method of Netigator, HGC Broadband and NWT broadband)", "DHCP (The most common connection method of HKBN and iCable)", and "Fixed IP". The "DHCP" option is selected. A yellow box highlights the radio buttons with the text "Choose your connection method". At the bottom, there are three buttons: "Back", "Next", and "Cancel". The "Next" button is highlighted with a yellow box and the text "Click 'Next' to continue".

4.6. Step 6

4.6.1. PPPoE Settings

Enter your PPPoE Login ID and Password and then click "Next" to continue

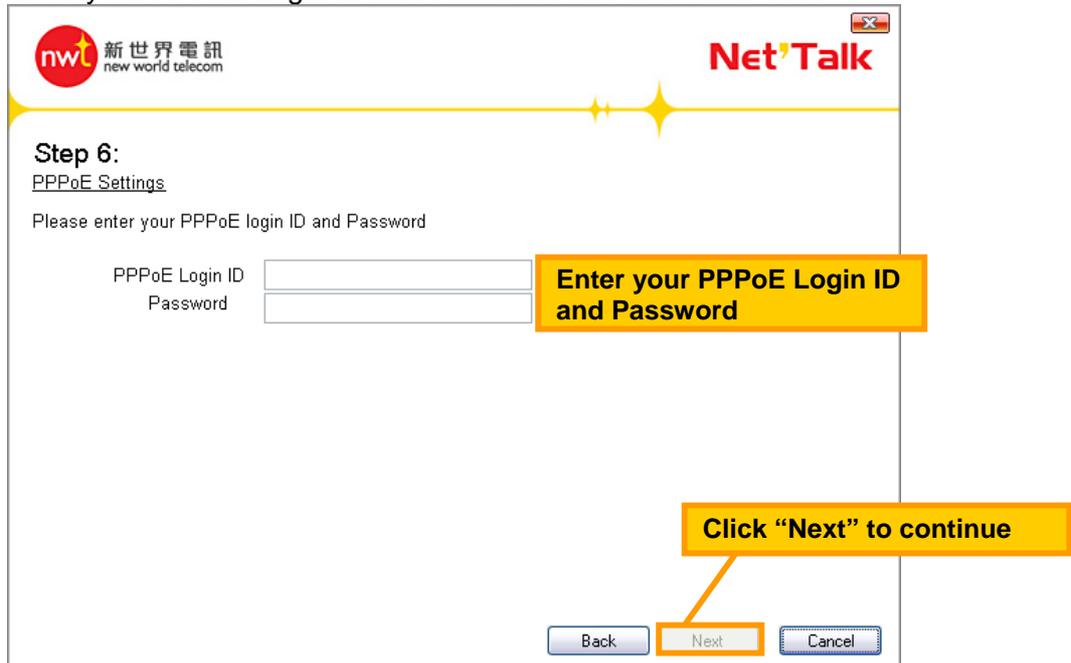

The screenshot shows the NetTalk interface for Step 6. At the top left is the NWT logo (新世界電訊 new world telecom) and at the top right is the NetTalk logo. The main heading is "Step 6:" followed by the sub-heading "PPPoE Settings" and the instruction "Please enter your PPPoE login ID and Password". There are two input fields: "PPPoE Login ID" and "Password". A yellow box highlights both input fields with the text "Enter your PPPoE Login ID and Password". At the bottom, there are three buttons: "Back", "Next", and "Cancel". The "Next" button is highlighted with a yellow box and the text "Click 'Next' to continue".

4.6.2. DHCP Settings

Wait until the settings has been saved and NetTalk Phone Adaptor to be activated and then click "Next" to continue



4.6.3. Fixed IP Settings

Enter your IP address information and then click "Next" to continue

Step 6:
Fixed IP address settings

Please enter your IP address information

IP Address

Subnet mask

Default Gateway

Preferred DNS Server

Alternate DNS Server

Back Next Cancel

1. Enter your IP address information

2. Click "Next" to continue

4.7. Step 7

Wait for system check to be completed and then click "Next" to continue

Step 7:

- ✓ Connectivity Check
- ▶ Internet Connection Check
- NetTalk Phone Adaptor Check


Progress bar: [|||||]

Back Next Cancel

Click "Next" to continue

4.8. Exit the setup programme

Click "Finish" to exit the setup programme and enjoy using NWT NetTalk Telephony Service.

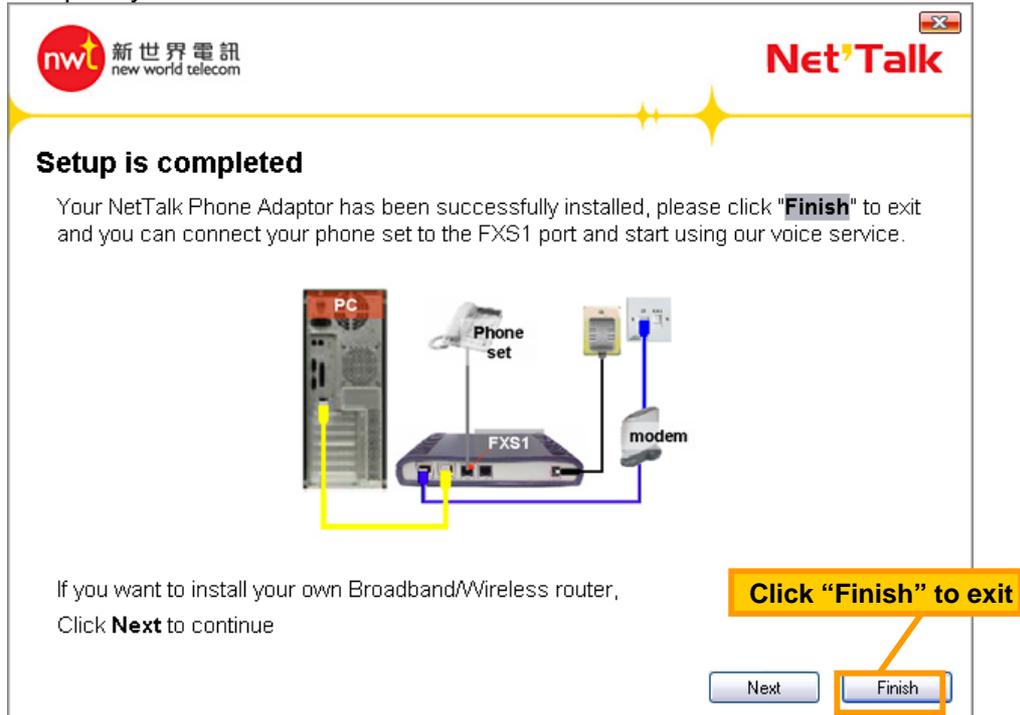

Setup is completed

Your NetTalk Phone Adaptor has been successfully installed, please click "**Finish**" to exit and you can connect your phone set to the FXS1 port and start using our voice service.


If you want to install your own Broadband/Wireless router, Click **Next** to continue

Click "Finish" to exit

Next Finish

4.9. To install your Broadband/Wireless router

If you have your own broadband or wireless router, please carry out the steps as instructed and then Click "Finish" to exit

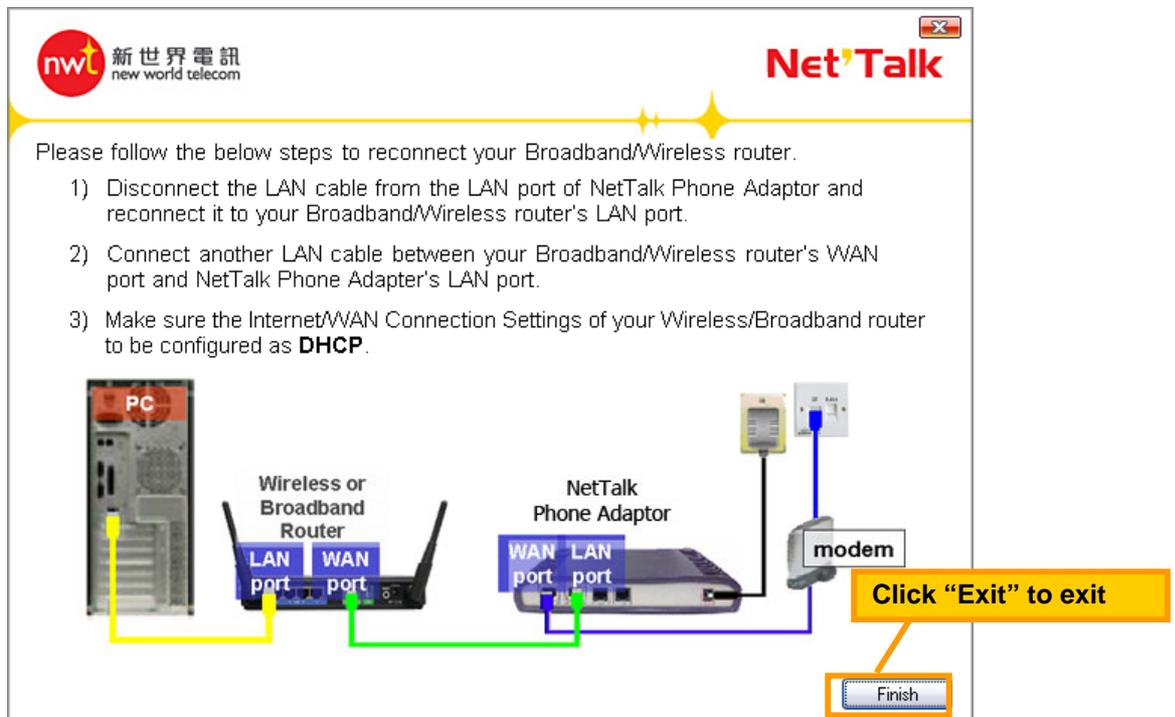

Please follow the below steps to reconnect your Broadband/Wireless router.

- 1) Disconnect the LAN cable from the LAN port of NetTalk Phone Adaptor and reconnect it to your Broadband/Wireless router's LAN port.
- 2) Connect another LAN cable between your Broadband/Wireless router's WAN port and NetTalk Phone Adaptor's LAN port.
- 3) Make sure the Internet/WAN Connection Settings of your Wireless/Broadband router to be configured as **DHCP**.

Click "Exit" to exit


Finish

5. To test your NetTalk Phone Adaptor


Click "Diagnosis" button to start



Wait for checking to be completed

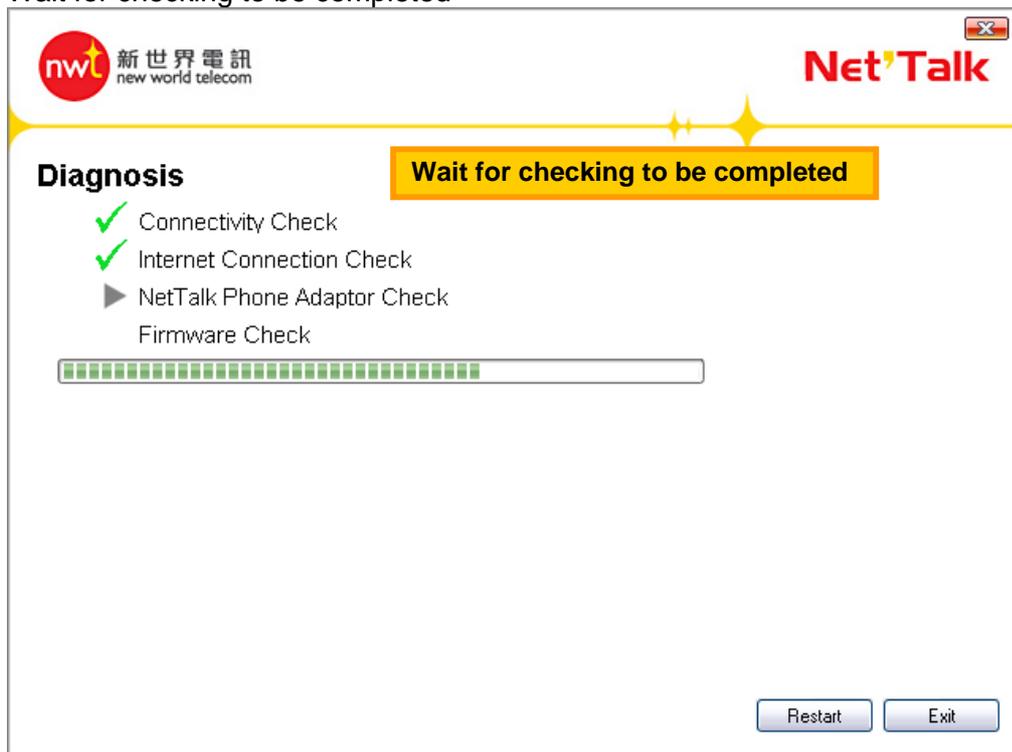

Click "Restart" to check again or click "Exit" to quit

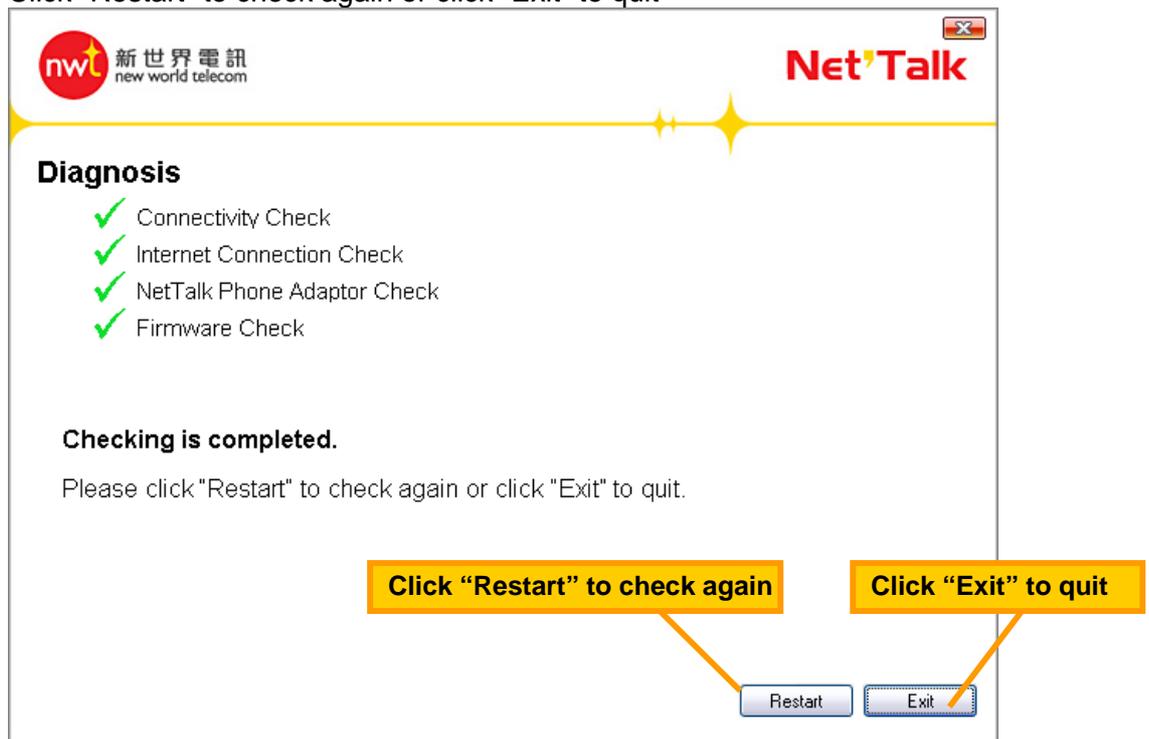

- END -