

Blast Chiller

Main Features

SMART CHILL - Variable air velocity.

RR36 - 36kg Blast Chill capacity per cycle.

RR50 - 50kg Blast Chill capacity per cycle. Food product is required to be correctly portioned in Gastronorm pans.

- Removable and adjustable shelf runners able to accept Gastronorm pans.
- Temperature display in °C.
- Mode selection timer or four point Frigiprobe by internal food temperature.
- Automatic preservation mode at the end of cycle.
- Defrost feature removes ice from evaporator.
- R404A refrigerant - CFC free.
- Self-closing door magnetically seals. Door remains open past 90°C for convenient loading and unloading.
- Internal coved corners, removable door gasket.
- Water protection index rating IP459.
- Adjustable legs for levelling.
- Temperature recorder with printer (optional).

RR36A Air cooled condensing unit

RR36S Remote condensing unit version
(Remote condensing unit not included.)

RR50A Air cooled condensing unit

RR50S Remote condensing unit version
(Remote condensing unit not included.)

Description

Foodservice & Bakery Reach-In Blast Chiller/Freezer designed to accept Gastronorm 1/1 pans.

SMARTCHILL



RR36A Blast Chill




RR50A Blast Chill

MOFFAT
FRIGINOX
FAST CHILL/FREEZE




**The Smarter
Way to Chill**

Specifications

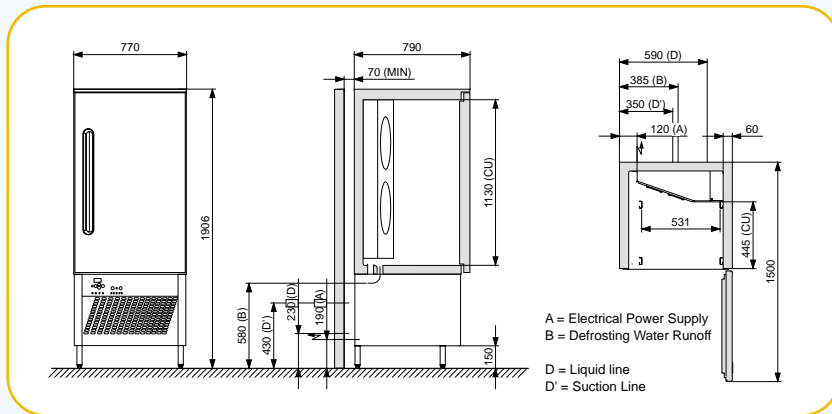

RR36A, RR36S

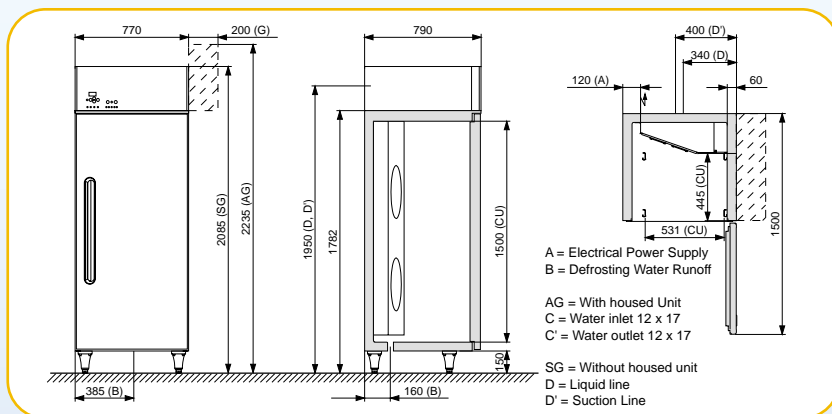

RR50A, RR50S

Refrigeration Equipment RR36S only

- Complete remote condensing unit. Suitable for local conditions.
- Condensing capacity upright Blast Chiller 1500/3000W for the respective evaporation temperatures of -20/0°C.
- Remote condensing unit with 'pump down' control.

Refrigeration Equipment RR50S only

- Complete remote condensing unit. Suitable for local conditions.
- Condensing capacity upright Blast Chiller 2100/4700W for the respective evaporation temperatures of -20/0°C.
- Remote condensing unit with 'pump down' control.

RR36A, RR36S

Dimensions

W 770mm x D 790mm x H 1906mm

Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 36kg

Electrical rating

230 - 240Vac 1P+N+E 50Hz
A 2230W; S 380W

Refrigerant type

R404A

Standard pan capacity

10 GN 1/1 capacity

Clearances

Top 70mm; Side 70mm

RR50A, RR50S

Dimensions

W 770mm x D 790mm x H 2235mm

Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 50kg

Electrical rating

230 - 240Vac 1P+N+E 50Hz
A 3400W; S 580W

Refrigerant type

R404A

Standard pan capacity

14 GN 1/1 capacity


Clearances

Top 70mm; Side 70mm



Disclaimer:

All unit capacities are based on subjective testing. Moffat accepts no liability for production values.



www.moffat.com.au

**Australia
Moffat Pty Ltd**

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
Email vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
Email nswsales@moffat.com.au

South Australia
Telephone 08-8274 2116
Email dmiller@moffat.com.au

Queensland
Telephone 07-3630 8600
Email qldsals@moffat.com.au

Western Australia
Telephone 08-9305 8855
Email jberent@moffat.com.au

**New Zealand
Moffat Ltd**

Christchurch
Telephone 03-389 1007
Email sales@moffat.co.nz
www.moffat.co.nz

Auckland
Telephone 09-574 3150
Email sales@moffat.co.nz