

# Blast Chiller & Freezer

## Main Features

SMART CHILL - Variable air velocity.

TSR-11SC - 15kg Blast Chill capacity per cycle or 11kg Blast Freeze capacity per cycle.

TSR-11SD - 15kg Blast Chill capacity per cycle or 11kg Blast Freeze capacity per cycle.

Food product is required to be correctly portioned in Gastronorm pans/bakery trays.

- Removable and adjustable shelf runners able to accept Gastronorm pans and Euro standard 600mm x 400mm bakery trays.
- Temperature display in °C.
- Mode selection timer or four point Frigiprobe by internal food temperature.
- Automatic preservation mode at the end of cycle.
- Defrost feature removes ice from evaporator.
- R404A refrigerant - CFC free.
- Self-closing door magnetically seals. Door remains open past 90°C for convenient loading and unloading.
- Internal coved corners, removable door gasket.
- Water protection index rating IP459.
- Adjustable legs for levelling.

## TSR-11SC Air cooled condensing unit without worktop

(Remote condensing unit not included.)

## TSR-11SD Air cooled condensing unit with Stainless steel worktop and splashback

(Remote condensing unit not included.)

## Description

Foodservice & Bakery Reach-In Blast Chiller/Freezer designed to accept Gastronorm 1/1 pans or Euro 600mm x 400mm bakery racks.

**MOFFAT**  
**FRIGINOX**  
FAST CHILL/FREEZE




TSR-11SD Blast Chill/Freeze

**SMARTCHILL**

**The Smarter  
Way to Chill**


# Specifications

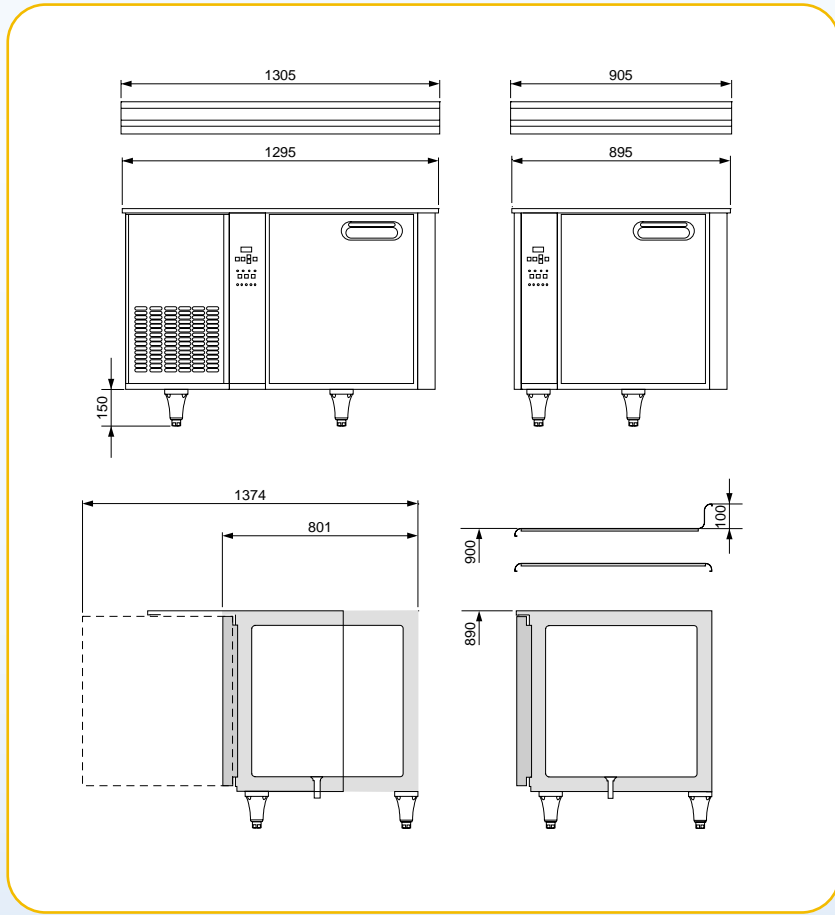

## TSR-11SC, TSR-11SD

### Refrigeration Equipment

- Complete remote condensing unit. Suitable for local conditions.
- Condensing capacity upright Blast Chiller 530/2000W for the respective evaporation temperatures of -40/-20°C.
- Remote condensing unit with 'pump down' control.



## TSR-11SC

### Dimensions

W 1305mm x D 801mm x H 900mm

### Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 15kg  
Blast freezing from +70°C to -18°C temperature, capacity per cycle 11kg

### Electrical rating

230 - 240Vac 1P+N+E 50Hz 850W

### Refrigerant type

R404A

### Standard pan capacity

4 GN 1/1 capacity  
8 Euro 600mm x 400mm  
Please specify when ordering

### Clearances

Top 70mm; Side 70mm

## TSR-11SD

### Dimensions

W 1305mm x D 801mm x H 900mm

### Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 15kg  
Blast freezing from +70°C to -18°C temperature, capacity per cycle 11kg

### Electrical rating

230 - 240Vac 1P+N+E 50Hz 850W

### Refrigerant type

R404A

### Standard pan capacity

4 GN 1/1 capacity  
8 Euro 600mm x 400mm  
Please specify when ordering

### Clearances

Top 70mm; Side 70mm

### Disclaimer:

All unit capacities are based on subjective testing. Moffat accepts no liability for production values.



www.moffat.com.au

Australia  
Moffat Pty Ltd

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
Email vsales@moffat.com.au  
www.moffat.com.au

New South Wales  
Telephone 02-8833 4111  
Email nswsales@moffat.com.au

South Australia  
Telephone 08-8274 2116  
Email dmiller@moffat.com.au

Queensland  
Telephone 07-3630 8600  
Email qldsals@moffat.com.au

Western Australia  
Telephone 08-9305 8855  
Email jberent@moffat.com.au

New Zealand  
Moffat Ltd

Christchurch  
Telephone 03-389 1007  
Email sales@moffat.co.nz  
www.moffat.co.nz

Auckland  
Telephone 09-574 3150  
Email sales@moffat.co.nz