

B l a s t C h i l l e r & F r e e z e r

Main Features

SMART CHILL - Variable air velocity.

TSR-11A - 15kg Blast Chill capacity per cycle
or 11kg Blast Freeze capacity per cycle.

TSR-11B - 15kg Blast Chill capacity per cycle
or 11kg Blast Freeze capacity per cycle.

Food product is required to be correctly portioned
in Gastronorm pans/bakery trays.

- Removable and adjustable shelf runners able to accept Gastronorm pans and Euro standard 600mm x 400mm bakery trays.
- Temperature display in °C.
- Mode selection timer or four point Frigiprobe by internal food temperature.
- Automatic preservation mode at the end of cycle.
- Defrost feature removes ice from evaporator.
- R404A refrigerant - CFC free.
- Self-closing door magnetically seals. Door remains open past 90°C for convenient loading and unloading.
- Internal coved corners, removable door gasket.
- Water protection index rating IP459.
- Adjustable legs for levelling.

**TSR-11A Air cooled condensing unit
without worktop**

**TSR-11B Air cooled condensing unit
with Stainless steel worktop and splashback**

Description

Foodservice & Bakery Reach-In Blast Chiller/Freezer designed to accept Gastronorm 1/1 pans or Euro 600mm x 400mm bakery racks.

MOFFAT
FRIGINOX
FAST CHILL / FREEZE




TSR-11B Blast Chill/Freeze

SMARTCHILL

**The Smarter
Way to Chill**

Specifications

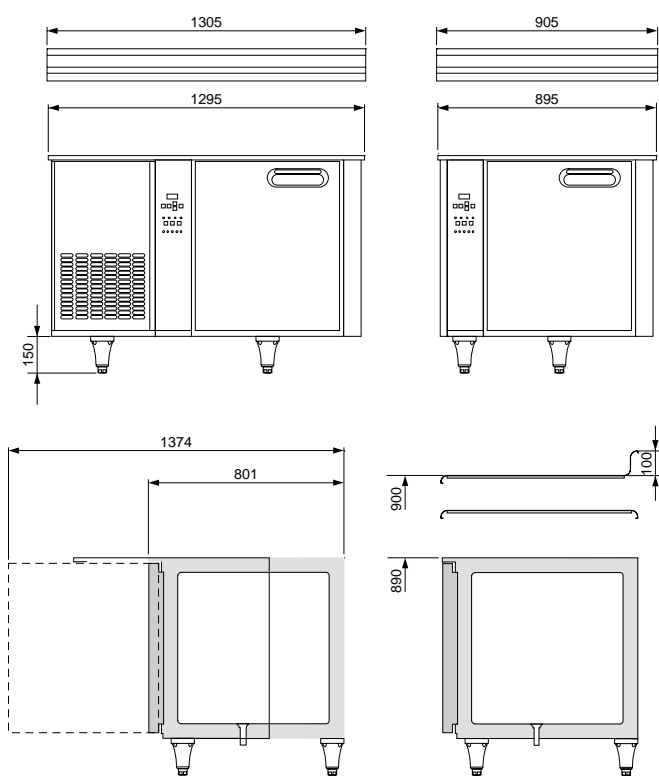

TSR-11A, TSR-11B



TSR-11A

Dimensions

W 1305mm x D 800mm x H 900mm

Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 15kg
Blast freezing from +70°C to -18°C temperature, capacity per cycle 11kg

Electrical rating

230 - 240Vac 1P+N+E 50Hz 1600W

Refrigerant type

R404A

Standard pan capacity

4 GN 1/1 capacity
8 Euro 600mm x 400mm
Please specify when ordering

Clearances

Top 70mm; Side 70mm

TSR-11B

Dimensions

W 1305mm x D 800mm x H 900mm

Kg capacity per cycle

Blast chilling from +70°C to +3°C temperature, capacity per cycle 15kg
Blast freezing from +70°C to -18°C temperature, capacity per cycle 11kg

Electrical rating

230 - 240Vac 1P+N+E 50Hz 1600W

Refrigerant type

R404A

Standard pan capacity

4 GN 1/1 capacity
8 Euro 600mm x 400mm
Please specify when ordering

Clearances

Top 70mm; Side 70mm

Disclaimer:

All unit capacities are based on subjective testing. Moffat accepts no liability for production values.



www.moffat.com.au

Australia Moffat Pty Ltd

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
Email vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
Email nswsales@moffat.com.au

South Australia
Telephone 08-8274 2116
Email dmiller@moffat.com.au

Queensland
Telephone 07-3630 8600
Email qldsals@moffat.com.au

Western Australia
Telephone 08-9305 8855
Email jberent@moffat.com.au

New Zealand Moffat Ltd

Christchurch
Telephone 03-389 1007
Email sales@moffat.co.nz
www.moffat.co.nz

Auckland
Telephone 09-574 3150
Email sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Ltd. reserves the right to change specifications and design without notice.
Printed in New Zealand Copyright Moffat Ltd Moffat/2477/BH/3M/9.02