




2014 Bench Products

Test & Measurement Solutions



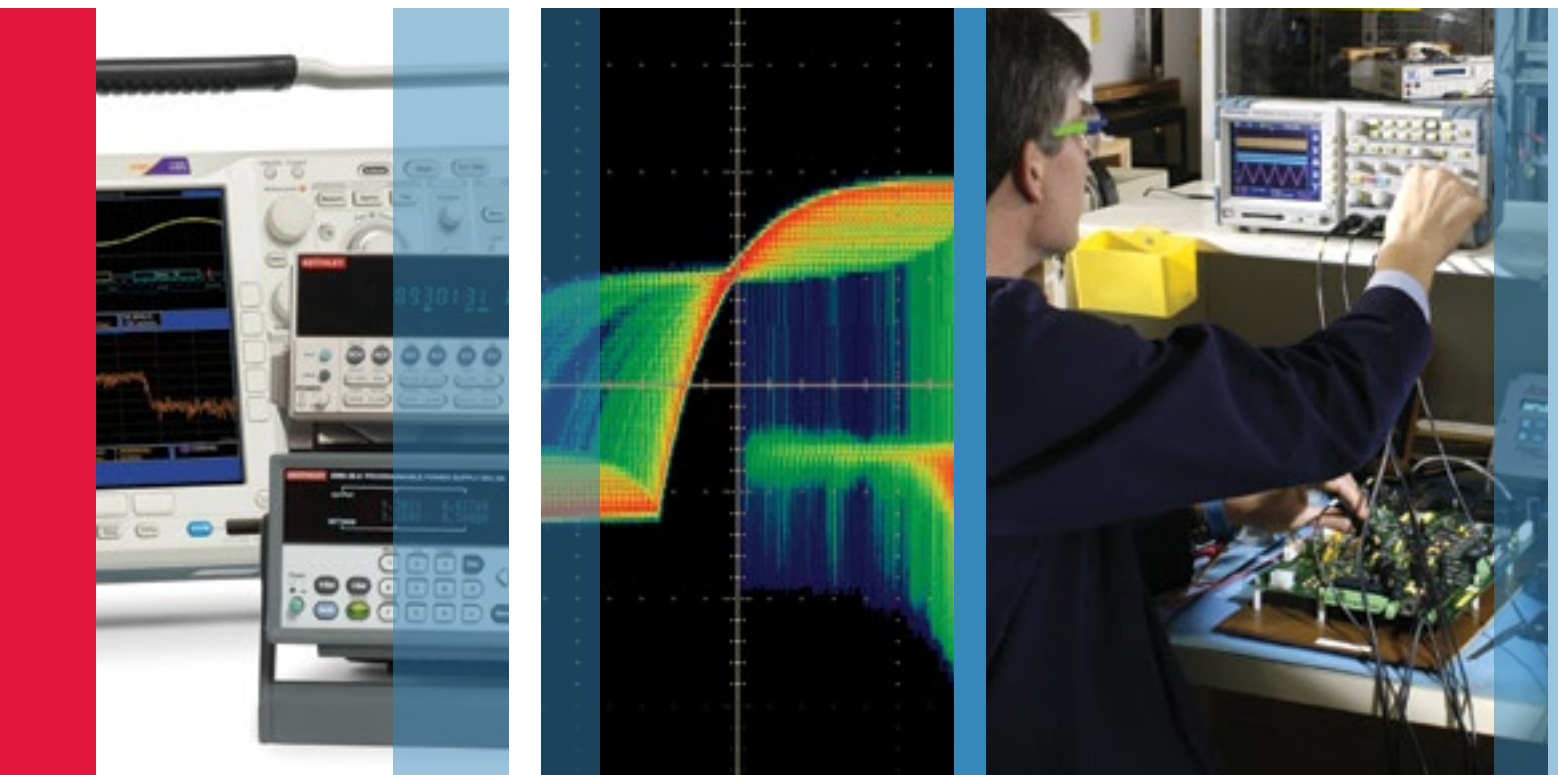

6 Instruments. 1 Scope. Infinite Versatility.



The 6-in-1 MDO3000 Mixed Domain Oscilloscope with a spectrum analyzer.

Designs have evolved, integrating analog, digital and RF technologies. Now, it's the oscilloscope's turn. Introducing the MDO3000 Mixed Domain Oscilloscope. Featuring a spectrum analyzer, function generator and more, it's the only scope that comes with the instruments you use most, built-in. It's also upgradeable, enabling you to add instruments and increase bandwidth as your needs grow. So you get unlimited versatility at a starting price that's anything but limiting.

Win one at tek.com/oneisthenewsix

6 Advanced Instruments Built In

- Oscilloscope: 100 MHz-1 GHz models, 2 or 4 channels, 5 GS/s sample rate, 10 Mpoint record length
- Spectrum Analyzer: 9 kHz-3 GHz with 3 GHz wide capture bandwidth
- Logic Analyzer: 16 channels, 121 ps timing resolution
- Arbitrary/Function Generator: 50 MHz, 13 standard plus arbitrary waveforms
- Protocol Analyzer: Serial data trigger, decode and analysis
- Digital Voltmeter: 4-digits resolution

*Starting price includes an oscilloscope, spectrum analyzer and digital voltmeter. Other instruments and bandwidth may be added for additional cost.
© 2014 Tektronix, Inc.





New Products



MDO3000 Mixed Domain Oscilloscope

6 Advanced Instruments in One

Designs have evolved, integrating analog, digital and RF technologies. Now, it's the oscilloscope's turn. Featuring a spectrum analyzer, function generator and more, it's the only scope that comes with the instruments you use most, built-in. It's also upgradeable, enabling you to add instruments and increase bandwidth as your needs grow. So you get unlimited versatility at a starting price that's anything but limiting.



TBS1000B/TBS1000B-EDU

The TBS1000B and TBS1000B-EDU are full featured instruments in a class all their own. Whether you're looking for an oscilloscope that's been specifically designed for teaching labs or one with extensive monitoring and analysis capability, the TBS Series of instruments are an excellent choice to handle everyday test challenges.



PA1000 Power Analyzer

The PA1000 measures power, energy and harmonics of power supplies and any single-phase product connected to the AC line. Best in class accuracy and connectivity make the PA1000 the ideal tool for proving energy efficient designs.



Model 2450 SourceMeter® SMU Instrument with Graphical Touchscreen

Offers the capabilities of analyzers, curve tracers, and I-V systems at a fraction of their cost. Source and measure voltage, current, and resistance with one tightly-coupled instrument. Capacitive touchscreen technology lets you get more done in less time. It's a whole new experience in DC source-measure testing.

For an in-depth look at all of our products, including demos and 360-degree product explorers, please visit www.tektronix.com.

All information on www.tektronix.com supersedes all other information.

Table of Contents

4-9	Oscilloscope Selection Guide
	Mixed Signal and Mixed Domain
10	MSO/DPO2000B Series
11	MDO3000 Series
12	MDO4000B Series
13	MSO/DPO4000B Series
	Advanced Signal Analysis
14	MSO/DPO5000B Series
15	DPO7000C Series
	Basic
17	TBS1000B-EDU Series
18	TBS1000B Series
19	TBS1000 Series
	Battery Powered and Handheld
20	THS3000 Series
21	TPS2000B Series
	TDS
22	TDS2000C Series
23	TDS3000C Series
24	Probes and Accessories
25	Signal Generator Selection Guide
26	AFG2000
27	AFG3000C Series
28	SourceMeter® Selection Guide
29-30	Model 2450
31	2400 Series
32	2600B Series
33	2650A Series
34	Power Analyzer Selection Guide
35	PA1000 Series
36	PA4000 Series
37	Digital Multimeters Selection Guide
38	Keithley Models 2000, 2100, 2110
39	Keithley Models 2001, 2002, 2010
40	Tektronix DMM4020
41	Tektronix DMM4040/4050
42	Data Acquisition Selection Guide
43	Series 2700
44	Series 3700A
45	Low-Level Instrument Selection Guide
46	2182A Nanovoltmeter
47	6220 / 6221 Current Sources
48	6485, 6487 Picoammeters, 6482 Picoammeter & Voltage Source
49	6514 / 6517B / 6430 Electrometers
50	Power Supplies Selection Guide
51	PWS2000 Series
52	PWS4000 Series
53	2200 Programmable Single Channel DC Power Supplies with Remote Sensing
54	2220/2230 Programmable Multiple Channel DC Power Supplies with Remote Sensing
55	2290 High Voltage Power Supplies
56	2300 Portable Device Battery/Charger Simulators
57	2300 High Speed Power Supplies
58	Frequency Counter/Timers Selection Guide
59	FCA3000/3100 Series
60	MCA3000 Series
61	RF Power Meters Selection Guide
62	PSM3000, 4000 and 5000 Series
63-64	Service Solutions



Oscilloscopes

Oscilloscope Selection Guides, Pages 5 - 7

Choosing Your Oscilloscope

Tektronix offers oscilloscopes for many different applications and uses. To help you choose the right scope for your needs, the most common criteria for selecting a scope are listed below, along with helpful tips for determining your requirements.

1 Bandwidth

All oscilloscopes have a low-pass frequency response that rolls off at higher frequencies. Oscilloscope bandwidth is specified as being the frequency at which a sinusoidal input signal is attenuated to 70.7% of the signal's true amplitude – the -3 dB point. Your oscilloscope must have sufficient bandwidth to capture all relevant frequency components of your signal. If you regularly work with digital signals, it may be easier to consider bandwidth by comparing signal and oscilloscope rise time specifications. Use an oscilloscope with a rise time specification five times faster than your signal rise time to keep error below 2%.

Rule: Bandwidth > 5 X Highest Signal Frequency

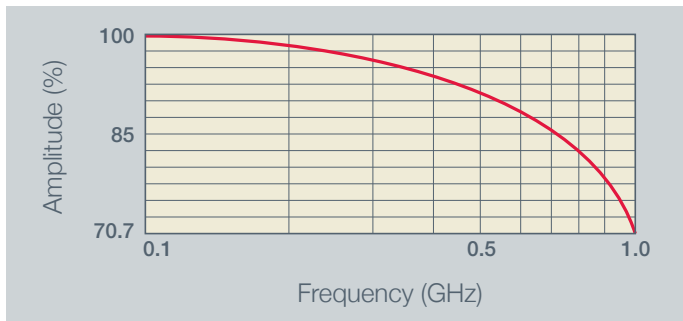


Figure 1: Typical frequency response curve for a general purpose oscilloscope

2 Sample Rate

The faster an oscilloscope samples, the greater the resolution and detail of the displayed waveform, and the less likely that critical information or events will be lost. Tektronix recommends at least 5X oversampling to ensure signal details are captured and to avoid aliasing.

Rule: Sample Rate > 5 x (Highest Frequency Component)

3 Record Length

Record length is the number of samples the oscilloscope can digitize and store in a single acquisition. Since an oscilloscope can store only a limited number of samples, the waveform duration – or length of “time” captured – will be inversely proportional to the oscilloscope's sample rate. A longer record length enables a longer time window to be captured with high resolution.

Rule: Captured Time = (Record Length) / (Sample Rate)

4 Digital Channels and Spectrum Analyzer Input

Today's oscilloscopes offer more than just analog channels for system-level troubleshooting of complex designs.

- If you need to analyze a parallel bus or multiple serial buses, the Tektronix MSO Series of mixed signal oscilloscopes and MDO Series of mixed domain oscilloscopes offer 16 digital channels and up to 4 analog channels for analyzing multiple signals at once.
- If you are working with RF signals, the Tektronix MDO Series of mixed domain oscilloscopes offers a built-in spectrum analyzer for time-correlated analysis of analog, digital and RF signals.

5 Features and Analysis Capability

Tektronix oscilloscopes offer a range of features and analysis capabilities. When choosing your scope, you should review available triggers, waveform search tools, automated measurements, and analysis packages such as serial bus analysis, jitter and power analysis to ensure they meet your needs.



Advanced Signal Analysis Oscilloscopes



	MSO/DPO5000B	DPO7000C Series
Additional Resources		
Channels	4 analog channels; 16 digital channels (MSO5000B)	4 analog channels
Bandwidth	350 MHz to 2 GHz	500 MHz to 3.5 GHz
Spectrum Analyzer Frequency Range	--	--
Sample Rate	5 GS/s to 10 GS/s (analog); 60.6 ps (16.5 GS/s) MagniVu™ (digital)	10 GS/s to 40 GS/s
Max Record Length	Up to 250 Mpoints	Up to 500 Mpoints
Trigger Types	Edge, Sequence, Logic, Pulse Width, Glitch, Runt, Timeout, Transition, Set-up and Hold, Rise/Fall Time, Video, I ² C*, SPI*, USB (Low, Full, High)*, RS-232/422/485/UART*, Parallel (MSO5000B), Visual Trigger *Optional	Pinpoint™ Triggering, Edge, Glitch, Pulse Width, Runt, Time-out, Transition, Setup/Hold, Pattern, State, Window, Trigger Delay (by Time and by Event), I ² C*, SPI*, USB (Low, Full)*, RS-232/422/485/UART*, Visual Trigger *Optional
Optional Serial Bus Decode and Analysis	SR-AERO: MIL-STD 1553 SR-AUTO: CAN/LIN/FlexRay SR-COMP: RS-232/422/485/UART SR-DPHY: MIPI D-PHY SR-EMBD: I ² C, SPI SR-ENET: 10/100Base-T Ethernet SR-USB: USB VNM: CAN, LIN	SR-AERO: MIL-STD 1553 SR-AUTO: CAN/LIN/FlexRay SR-COMP: RS-232/422/485/UART SR-DPHY: MIPI D-PHY SR-EMBD: I ² C, SPI SR-ENET: 10/100Base-T Ethernet SR-PCIE: PCI Express SR-USB: USB LSA: CAN, LIN
Connectivity	USB Host (x6), USB Device, LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), Video Out, GPIB* *Optional	USB Host (x5), LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), GPIB, eSATA, DVI
Waveform Math and Analysis	53 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, FFT, Measurement Statistics, Waveform Histograms, Waveform Limit Testing Optional: BRR: BroadR-Reach Compliance Test; DDRA: DDR Memory Bus Analysis; DJA: DPOJET Advanced Jitter and Eye Diagram Analysis; ET3: Ethernet Compliance Test Solution; MTM: Mask Testing; PWR: Power Analysis; SignalVu Vector Signal Analysis; USB: USB Compliance Test Solution; MOST: MOST 50/150 Compliance Test Solution; HSIC: HSIC Electrical Validation; USBPWR: USB Power Adapter/ EPS Compliance Automated Test Solution	53 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, FFT, Measurement Statistics, Waveform Histograms, Waveform Limit Testing Optional: BRR: BroadR-Reach Compliance Test; DDRA: DDR Memory Bus Analysis; DJA: DPOJET Advanced Jitter and Eye Diagram Analysis; D-PHY: MIPI D-PHY Essentials; ET3: Ethernet Compliance Test Solution; MTM: Mask Testing; PWR: Power Analysis; SignalVu Vector Signal Analysis; USB: USB Compliance Test Solution; MOST: MOST 50/150 Compliance Test Solution; HSIC: HSIC Electrical Validation; USBPWR: USB Power Adapter/ EPS Compliance Automated Test Solution
Software	--	--
Battery Operation	--	--
Upgrade	<ul style="list-style-type: none"> ▪ Add 16 digital channels ▪ Add extended record length, up to 250 Mpoints ▪ Add serial bus compliance testing ▪ Add measurements and analysis (power, jitter, limit/mask) ▪ Add serial bus triggering and decode 	<ul style="list-style-type: none"> ▪ Add 16 digital channels ▪ Add extended record length, up to 250 Mpoints ▪ Add serial bus compliance testing ▪ Add measurements and analysis (power, jitter, limit/mask) ▪ Add serial bus triggering and decode



Mixed Signal and Mixed Domain Oscilloscopes



	MSO/DPO2000B	MDO3000
Additional Resources		
Channels	2, 4 analog channels; 16 digital channels (MSO2000B)	2, 4 analog channels; 16 digital channels (with MDO3MSO option)
Bandwidth	70 MHz to 200 MHz	100 MHz to 1 GHz
Spectrum Analyzer Frequency Range	--	Standard: 9 kHz to Analog Bandwidth Optional: 9 kHz to 3 GHz
Sample Rate	1 GS/s (analog); 1 GS/s (digital, only 1 pod); 500 MS/s (digital, both pods)	2.5 GS/s to 5 GS/s (analog); 121.2 ps (8.25 GS/s) MagniVu™ (digital)
Max Record Length	1 Mpoints	10 Mpoints
Trigger Types	Edge, Logic, Pulse Width, Runt, Set-up and Hold, Rise/Fall Time, Video, I ² C*, SPI*, CAN*, LIN*, RS-232/422/485/UART*, Parallel (MSO2000B) *Optional	Edge, Sequence, Logic, Pulse Width, Runt, Timeout, Set-up and Hold, Rise/Fall Time, Video, Extended Video, I ² C*, SPI*, CAN*, LIN*, FlexRay*, RS-232/422/485/UART*, I ² S/LJ/RJ/TDM*, MIL-STD-1553*, USB 2.0*, Parallel (with MDO3MSO option) *Optional
Optional Serial Bus Decode and Analysis	DPO2AUTO: CAN and LIN DPO2COMP: RS-232/422/485/UART DPO2EMBD: I ² C, SPI	MDO3AERO: MIL-STD-1553 MDO3AUDIO: I ² S, LJ, RJ, TDM MDO3AUTO: CAN and LIN MDO3COMP: RS-232/422/485/UART MDO3EMBD: I ² C, SPI MDO3FLEX: FlexRay MDO3USB: USB2.0
Connectivity	USB Host, USB Device, GPIB*, Optional DPO2CONN Module: LAN (10/100 Base-T Ethernet) and Video Out *Optional	USB Host (x2), USB Device, LAN (10/100 Base-T Ethernet), Video Out, GPIB* *Optional
Waveform Math and Analysis	29 Automated Measurements, Waveform and Screen Cursors: Arithmetic Waveform Math, FFT	30 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, FFT, Measurement Statistics Optional: MDO3PWR: Power Analysis MDO3LMT: Limit/mask test
Software	PC communications software: OpenChoice® Desktop	PC Communications Software: OpenChoice® Desktop
Battery Operation	--	--
Upgrade	<ul style="list-style-type: none"> Add serial bus triggering and decode 	<ul style="list-style-type: none"> Increase bandwidth Add Arbitrary/Function generator Add 16 digital channels Increase spectrum analyzer maximum frequency to 3 GHz Add measurements and analysis (power, limit/mask) Add serial bus triggering and decode



Mixed Signal and Mixed Domain Oscilloscopes



	MDO4000B	MSO/DPO4000B
Additional Resources		
Channels	4 analog channels; 16 digital channels; 1 spectrum analyzer input	2, 4 analog channels; 16 digital channels (MSO4000B)
Bandwidth	100 MHz to 1 GHz (analog)	100 MHz to 1 GHz
Spectrum Analyzer Frequency Range	9 kHz - 3 GHz or 9 kHz - 6 GHz (MDO4000B only)	--
Sample Rate	2.5 GS/s to 5 GS/s (analog); 60.6 ps (16.5 GS/s) MagniVu™ (digital)	2.5 GS/s to 5 GS/s (analog); 60.6 ps (16.5 GS/s) MagniVu™ (digital)
Max Record Length	20 Mpoints	Up to 20 Mpoints
Trigger Types	RF Power Level**, Edge, Sequence, Logic, Pulse Width, Runt, Timeout, Set-up and Hold, Rise/Fall Time, Video, Extended Video*, I ² C*, SPI*, USB*, Ethernet*, CAN*, LIN*, FlexRay*, RS-232/422/485/UART*, I ² S/LJ/RJ/TDM*, MILSTD-1553*, Parallel *Optional **With optional MDO4TRIG module, RF power level can be used as source for Pulse Width, Timeout, Runt, Logic, Sequence	Edge, Sequence, Logic, Pulse Width, Runt, Timeout, Set-up and Hold, Rise/Fall Time, Video, Extended Video*, I ² C*, SPI*, USB*, Ethernet*, CAN*, LIN*, FlexRay*, RS-232/422/485/UART*, I ² S/LJ/RJ/TDM*, MIL-STD-1553*, Parallel (MSO4000B) *Optional
Optional Serial Bus Decode and Analysis	DPO4AERO: MIL-STD-1553 DPO4AUDIO: I ² S, LJ, RJ, TDM DPO4AUTO: CAN and LIN DPO4AUTOMAX: CAN, LIN and FlexRay DPO4COMP: RS-232/422/485/UART DPO4EMBD: I ² C, SPI DPO4ENET: Ethernet DPO4USB: USB	DPO4AERO: MIL-STD-1553 DPO4AUDIO: I ² S, LJ, RJ, TDM DPO4AUTO: CAN and LIN DPO4AUTOMAX: CAN, LIN and FlexRay DPO4COMP: RS-232/422/485/UART DPO4EMBD: I ² C, SPI DPO4ENET: Ethernet DPO4USB: USB
Connectivity	USB Host (x4), USB Device, LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), Video Out, GPIB* *Optional	USB Host (x4), USB Device, LAN (10/100/1000 Base-T Ethernet, LXI Class C Compliant), Video Out, GPIB* *Optional
Waveform Math and Analysis	44 Automated Measurements, Waveform and Screen Cursors, Arithmetic Waveform Math, Spectrum Math, FFT, Advanced Math, Measurement Statistics, Waveform Histograms Optional: DPO4LMT: Limit and Mask Testing MDO4TRIG: Adv. RF Power Level Trigger DPO4PWR: Power Analysis DPO4VID: HDTV and Custom Triggering	41 Automated Measurements, Waveform and Screen Cursors, Arithmetic and Advanced Waveform Math, Measurement Statistics, Waveform Histograms Optional: DPO4LMT: Limit and Mask Testing DPO4PWR: Power Analysis DPO4VID: HDTV and Custom Triggering
Software	PC Communications Software: OpenChoice® Desktop Optional: Vector Signal Analysis Software: SignalVu-PC	PC Communications Software: OpenChoice® Desktop
Battery Operation	--	--
Upgrade	<ul style="list-style-type: none"> ▪ Add measurements and analysis (power, limit/mask, video, RF trigger) ▪ Add serial bus triggering and decode 	<ul style="list-style-type: none"> ▪ Add measurements and analysis (power, limit/mask, video, RF trigger) ▪ Add serial bus triggering and decode



Basic Oscilloscopes

Battery Powered Oscilloscopes with Isolated Channels



	TBS1000	TBS1000B/ TBS1000B-EDU	THS3000	TPS2000B
Additional Resources				
Channels	4	2	4 (isolated)	2, 4 (isolated)
Bandwidth	60 MHz to 150 MHz	50 MHz to 200 MHz	100 MHz to 200 MHz	100 MHz to 200 MHz
Sample Rate	1 GS/s	1 GS/s to 2 GS/s	2.5 GS/s to 5 GS/s	1 GS/s to 2 GS/s
Max Record Length	2.5 k points	2.5 k points	10 k points	2.5 k points
Trigger Types	Edge, Pulse (width), Video	Edge, Pulse (width), Video	Edge, Pulse (width), Event, Video, Non-interlaced	Edge, Pulse (width), Video
Optional Serial Bus Decode and Analysis	--	--	--	--
Connectivity	USB Host, USB Device, GPIB* *Optional	USB Host, USB Device, GPIB* *Optional	USB Host, USB Device	RS-232 (includes RS-232-to-USB Host Serial Cable), Centronics, CompactFlash
Waveform Math and Analysis	16 Automated Measurements, Arithmetic Waveform Math, FFT, Waveform Limit Testing, Automated Datalogging	34 Automated Measurements, Arithmetic Waveform Math, FFT, Dual channel Frequency Counter, Waveform Limit Testing*, TrendPlot™ function*, Automated Datalogging* * Not available on EDU models	21 Automated Measurements, Arithmetic Waveform Math, FFT	11 Automated Measurements, Arithmetic Waveform Math, FFT Optional: TPS2PWR1: Power Measurement and Analysis
Software	PC Communications Software: OpenChoice® Desktop, Educator Classroom and Lab Resource CD	PC Communications Software: OpenChoice® Desktop Software, PC Courseware Editor Tool, Product Documentation and Lab Resource CD	PC Communications Software: OpenChoice® Desktop	PC Communications Software: OpenChoice® Desktop, NI LabVIEW SignalExpress™ Tektronix Edition LE
Battery Operation	--	--	One THSBAT Battery Pack Included Standard	One TPSBAT Battery Pack Included Standard



The World's First Dedicated Teaching Oscilloscope

The TBS1000B-EDU Digital Storage Oscilloscope Series is designed specifically to meet the needs of today's schools and universities. It's the first oscilloscope to use the innovative new courseware system that enables educators to seamlessly integrate teaching materials onto an oscilloscope. Along with a powerful PC Courseware Editor Tool and a courseware website the TBS1000B-EDU supports a complete education ecosystem that uncovers new ways of enhancing the teaching and learning experience.



TDS Series Oscilloscopes



	TDS2000C	TDS3000C
Additional Resources		
Channels	2, 4	2, 4
Bandwidth	50 MHz to 200 MHz	100 MHz to 500 MHz
Sample Rate	500 MS/s to 2 GS/s	1.25 GS/s to 5 GS/s
Max Record Length	2.5 k points	10 k points
Trigger Types	Edge, Pulse (width), Video	Edge, Logic (Pattern, State), Pulse (Glitch, Width, Runt, Slew Rate), Video, Extended Video*, Comm* *Optional
Optional Serial Bus Decode and Analysis	--	--
Connectivity	USB Host, USB Device, GPIB* *Optional	USB Host, LAN (10Base-T Ethernet) Optional: TDS3GV Module: GPIB, RS-232, and Video Out
Waveform Math and Analysis	16 Automated Measurements, Arithmetic Waveform Math, FFT, Waveform Limit Testing, Automated Datalogging	25 Automated Measurements, Arithmetic Waveform Math, FFT Optional: TDS3LIM: Limit Testing TDS3TMT: Telecom Mask Testing TDS3VID: HDTV and Custom Video Triggering
Software	PC Communications Software: OpenChoice® Desktop, NI LabVIEW SignalExpress™ Tektronix Edition LE	PC Communications Software: OpenChoice® Desktop, NI LabVIEW SignalExpress™ Tektronix Edition LE
Battery Operation	--	Requires Optional TDS3BATC Battery Pack

Tektronix Reference Library

With over 20,000 items in our premium content library, it is likely you can find answers on our website to whatever questions you have. Here is a list of our most popular downloaded content for oscilloscopes. Visit www.tektronix.com to download your copy.

1. XYZs of Oscilloscopes Primer
2. ABCs of Probes Primer
3. Fundamentals of the MDO4000B Series Mixed Domain Oscilloscopes
4. Fundamentals of Signal Integrity Primer
5. Debugging Serial Buses in Embedded Systems Designs Application Note
6. Power Supply Measurement and Analysis Primer



MSO/DPO2000B Series

Test more, spend less with an oscilloscope that's packed with features and is also light on price. Measure as many as 20 channels of analog and digital signals. Speed debug with automated serial and parallel bus analysis. Search your entire record instantly with Wave Inspector®. Entry level has never been so powerful.

Product Highlights

- 1 Mpoint record length on all channels
- Over 125 available trigger combinations, including setup/hold, serial packet and parallel data
- Automated search and easy waveform navigation with Wave Inspector®
- 29 automated measurements and FFT analysis
- 5-year warranty



Quickly pan/zoom and automatically search your waveforms with Wave Inspector®.



Automatically trigger, decode and search your serial buses with optional analysis modules.

Models	Analog Channels	Digital Channels	Analog Bandwidth	Analog Sample Rate
DPO2002B	2	--	70 MHz	1 GS/s
MSO2002B	2	16	70 MHz	1 GS/s
DPO2004B	4	--	70 MHz	1 GS/s
MSO2004B	4	16	70 MHz	1 GS/s
DPO2012B	2	--	100 MHz	1 GS/s
MSO2012B	2	16	100 MHz	1 GS/s
DPO2014B	4	--	100 MHz	1 GS/s
MSO2014B	4	16	100 MHz	1 GS/s
DPO2022B	2	--	200 MHz	1 GS/s
MSO2022B	2	16	200 MHz	1 GS/s
DPO2024B	4	--	200 MHz	1 GS/s
MSO2024B	4	16	200 MHz	1 GS/s

Application Modules

Serial Bus Triggering and Protocol Analysis

DPO2AUTO	Automotive (CAN, LIN)
DPO2COMP	Computer (RS-232)
DPO2EMBD	Embedded (I ² C, SPI)

Recommended Accessories

DPO2CONN	Ethernet and Video Out Connectivity Module
119-7465-xx	TekVPI External Power Supply
ACD2000	Soft Carrying Case

Recommended Probes

Passive Voltage Probes

TPP0200	200 MHz, 300 V CAT II
---------	-----------------------

Active Voltage Probes

TAP1500 ¹	10X, 1.5 GHz, ± 8 V
----------------------	---------------------

Differential Voltage Probes

TDP0500 ¹	500 MHz, ± 42 V/± 4.25 V
----------------------	--------------------------

High Voltage Probes

THDP0200 ¹	200 MHz, ± 1500 V/± 150 V
TMDP0200 ¹	200 MHz, ± 750 V/± 75 V
THDP0100 ¹	100 MHz, ± 6000 V/± 600 V

Current Probes

TCP2020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min
TCP0030A ¹	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min
TCP0150 ¹	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min

¹ Requires 119-7465-xx TekVPI External Power Supply

Another Product for Consideration

Need an arbitrary/function generator for your project? The MDO3000 Series features six integrated instruments to capture analog, digital and RF signals with one scope.

Need more bandwidth? The MDO3000 Series offers up to 1 GHz analog bandwidth.

Ships with Product

- One TPP0100 100MHz, 10X Passive Probe Per Analog Channel (70 MHz model)
- One TPP0200 200 MHz, 10X Passive Probe Per Analog Channel (100 MHz & 200 MHz models)
- One P6316 16 Channel Logic Probe (MSO only)
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD, Power Cord
- 5-year Warranty




MDO3000 Series

This scope features six integrated instruments to capture analog, digital and RF signals with one scope. And add instruments, analysis functions and bandwidth as your needs change.

Product Highlights

- Integrated 6-in-1 oscilloscope that offers a spectrum analyzer, arbitrary function generator, logic analyzer, protocol analyzer and digital voltmeter
- Spectrum Analyzer standard on all models
- 10 Mpoint record length on all channels
- >280,000 wfm/s max. waveform capture rate with FastAcq
- Automated search and waveform navigation with Wave Inspector®



Monitor slowly changing RF events at a glance with spectrogram display.

Models	Analog Channels	Digital Channels (Optional)	Analog Bandwidth	Analog Sample Rate	Digital Sample Rate Main/ MagniVu™	Spectrum Analyzer Input	Spectrum Analyzer Frequency Range Standard/Optional
MDO3012	2	16	100 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 100 MHz / 9 kHz - 3 GHz
MDO3014	4	16	100 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 100 MHz / 9 kHz - 3 GHz
MDO3022	2	16	200 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 200 MHz / 9 kHz - 3 GHz
MDO3024	4	16	200 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 200 MHz / 9 kHz - 3 GHz
MDO3032	2	16	350 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 350 MHz / 9 kHz - 3 GHz
MDO3034	4	16	350 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 350 MHz / 9 kHz - 3 GHz
MDO3052	2	16	500 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 500 MHz / 9 kHz - 3 GHz
MDO3054	4	16	500 MHz	2.5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 500 MHz / 9 kHz - 3 GHz
MDO3102	2	16	1 GHz	5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 1 GHz / 9 kHz - 3 GHz
MDO3104	4	16	1 GHz	5 GS/s	500 MS/s / 8.25 GS/s	1	9 kHz - 1 GHz / 9 kHz - 3 GHz

Instrument Options**

MDO3AFG	Arbitrary function generator
MDO3MSO	16 digital channels; includes P6316 digital probe and accessories
MDO3SA	Increase spectrum analyzer input frequency range to 9 kHz – 3 GHz
MDO3SEC	Add password protected security to enable or disable all communication ports and firmware upgrades

Application Modules

Serial Bus Triggering and Protocol Analysis

MDO3AERO	Aerospace (MIL-STD-1553)
MDO3AUDIO	Audio (I ² S, LJ, RJ and TDM)
MDO3AUTO	Automotive (CAN, LIN)
MDO3COMP	Computer (RS-232)
MDO3EMBD	Embedded (I ² C, SPI)
MDO3FLEX	Automotive (FlexRay)
MDO3USB*	USB 2.0 (LS, FS, HS)

Application Modules

Additional Analysis

MDO3PWR	Power Analysis
MDO3LMT	Limit/Mask Test

Recommended Probes

Passive Voltage Probes

TPP0502	2X, 500 MHz, 300 V CAT II
---------	---------------------------

Active Voltage Probes

TAP1500	10X, 1.5 GHz, 8V
---------	------------------

High Voltage Probes

TMDP0200	250X/25X, 200 MHz, ± 750 V / ± 75 V
THDP0200	1000X/100X, 100 MHz, ± 6000 V / ± 600 V
TPP0850	50X, 800 MHz, 2500 V Peak
P5100A	100X, 500 MHz, 2500 V Peak

Differential Voltage Probes

TDP1000	50X/5X, 1 GHz, ± 42 V, ± 4.25 V
---------	---------------------------------

* USB 2.0 HS only available on 1 GHz analog bandwidth models and only for HS analysis.

** Can be preconfigured from the factory or ordered as stand-alone upgrade kits.

Recommended Probes

Current Probes

TCP0020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min
TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min
TCP0150	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min

Ships with Product

- One Low C Passive Probe Per Channel, TPP100 on 1 GHz Models, TPP0500B on 350 and 500 MHz Models, TPP0250 on all 100 and 200 MHz Models
- One P6316 16 Channel Logic Probe (with option MDO3MSO only)
- N-to-BNC Adapter
- OpenChoice® Desktop
- Calibration Certificate, Installation and Safety Manual, & Documentation on CD
- Accessory Bag
- Front Panel Language Overlay (if other than English)
- Power Cord
- 3-year Warranty



MDO4000B Series


The new revolutionary oscilloscope with a built-in spectrum analyzer. Capture synchronized analog, digital and RF signals for a complete, time correlated system view of your device. See both time and frequency domains in one glance. View the RF spectrum at any point in time to see how it changes. Quickly and efficiently solve the most complicated design issues—with an oscilloscope as integrated as your designs.

Product Highlights

- The world's first oscilloscope with a built-in spectrum analyzer
- Up to 3 GHz capture bandwidth on the spectrum analyzer input
- Integrated spectral analysis tools: automated and manual markers, spectrogram display, RF vs. time traces
- Advanced modulation analysis: MDO4000B with SignalVu-PC offers industry's widest bandwidth vector signal analyzer
- Built on the MSO4000B Series mixed signal oscilloscope platform



Use it as an oscilloscope OR a spectrum analyzer OR combined to capture synchronized analog, digital and RF signals.



See how your RF spectrum changes over time or device state.

Models	Analog Channels	Digital Channels	Analog Bandwidth	Analog Sample Rate	Digital Sample Rate Main/MagniVu™	Spectrum Analyzer Input	Spectrum Analyzer Frequency Range
MDO4014B-3	4	16	100 MHz	2.5 GS/s	500 MS/s / 16.5 GS/s	1	9 kHz – 3 GHz
MDO4034B-3	4	16	350 MHz	2.5 GS/s	500 MS/s / 16.5 GS/s	1	9 kHz – 3 GHz
MDO4054B-3	4	16	500 MHz	2.5 GS/s	500 MS/s / 16.5 GS/s	1	9 kHz – 3 GHz
MDO4054B-6	4	16	500 MHz	2.5 GS/s	500 MS/s / 16.5 GS/s	1	9 kHz – 6 GHz
MDO4104B-3	4	16	1 GHz	5 GS/s	500 MS/s / 16.5 GS/s	1	9 kHz – 3 GHz
MDO4104B-6	4	16	1 GHz	5 GS/s	500 MS/s / 16.5 GS/s	1	9 kHz – 6 GHz

Application Modules

Serial Bus Triggering and Protocol Analysis

DPO4AE-RO	Aerospace (MIL-STD 1553)
DPO4 AUDIO	Audio (I ² S, LJ, RJ and TDM)
DPO4AUTO	Automotive (CAN, LIN)
DPO4-AUTOMAX	Automotive (CAN, LIN, FlexRay)
DPO4COMP	Computer (RS-232)
DPO4EMBD	Embedded (I ² C, SPI)
DPO4ENET	Ethernet (10BASE-T, 100BASE-TX)
DPO4USB ¹	USB 2.0 (LS, FS, HS)

Additional Analysis

MDO4TRIG	Adv. RF Power Level Triggering
DPO4PWR	Power Analysis
DPO4LMT	Limit and Mask Testing
DPO4VID	HDTV & Custom Video Triggering
SignalVu-PC-SVE	Vector Signal Analysis Software

¹USB 2.0 HS only available on 1 GHz analog bandwidth models.

Recommended Service

SILV900	5-year Extended Warranty
---------	--------------------------

Recommended Probes

Passive Voltage Probes

TPP1000	10X, 1 GHz, 300 V CAT II
TPP0500B	10X, 500 MHz, 300 V CAT II
TPP0502	2X, 500 MHz, 300 V CAT II

Active Voltage Probes

TAP1500	10X, 1.5 GHz, ± 8 V
---------	---------------------

Differential Voltage Probes

TDP0500	50X/5X, 500 MHz, ± 42 V/± 4.2 V
TDP1000	50X/5X, 1 GHz, ± 42 V/± 4.2 V

High Voltage Probes

THDP0200	500X/50X, 200 MHz, ± 1500 V/± 150 V
TPP0850	50X, 800 MHz, 2500 V Peak

Current Probes

TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min
----------	--

Ships with Product

- Four TPP0500B (≤500 MHz models) or TPP1000 (1 GHz models) Passive Voltage Probes
- One P6616 16 Channel Logic Probe
- N-to-BNC Adapter (103-0045-00)
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Accessory Bag, Power Cord
- 3-year Warranty



MSO/DPO4000B Series

Debug complex designs faster with an oscilloscope that's as versatile as it is powerful. Measure up to 20 channels of analog and digital signals. Analyze serial and parallel buses. Instantly search your entire record with the time-saving Wave Inspector®. Finally, an oscilloscope that multitasks as well as you do.

Product Highlights

- Up to 20 Mpoint record length on all channels
- >50,000 wfms/s max. waveform capture rate with DPO technology
- Over 125 available trigger combinations, including setup/hold, serial packet and parallel data
- Automated search and easy waveform navigation with Wave Inspector®
- 41 automated measurements and FFT analysis



Ships with one passive probe per analog channel, with up to 1 GHz bandwidth and an industry-best 3.9 pF of capacitive loading.



Automatically trigger, decode and search your serial and parallel bus.

Models	Analog Channels	Digital Channels	Bandwidth	Record Length (Max)	Analog Sample Rate (Max)	Digital Sample Rate Main/MagniVu™
DPO4014B	4	--	100 MHz	20M	2.5 GS/s	--
MSO4014B	Replaced by MDO4014B-3. All the capabilities of MSO + Spectrum Analyzer					
DPO4034B	4	--	350 MHz	20M	2.5 GS/s	--
MSO4034B	Replaced by MDO4034B-3. All the capabilities of MSO + Spectrum Analyzer					
DPO4054B	4	--	500 MHz	20M	2.5 GS/s	--
MSO4054B	Replaced by MDO4054B-3. All the capabilities of MSO + Spectrum Analyzer					
DPO4102B-L	2	--	1 GHz	5M	5 GS/s	--
DPO4102B	2	--	1 GHz	20M	5 GS/s	--
DPO4104B-L	4	--	1 GHz	5M	5 GS/s	--
DPO4104B	4	--	1 GHz	20M	5 GS/s	--
MSO4102B-L	2	16	1 GHz	5M	5 GS/s	500 MS/s /16.5 GS/s
MSO4102B	2	16	1 GHz	20M	5 GS/s	500 MS/s /16.5 GS/s
MSO4104B-L	4	16	1 GHz	5M	5 GS/s	500 MS/s /16.5 GS/s
MSO4104B ^{*1}	4	16	1 GHz	20M	5 GS/s	500 MS/s /16.5 GS/s

Application Modules

Serial Bus Triggering and Analysis

DPO4AERO	Aerospace (MIL-STD 1553)
DPO4-AUDIO ^{*2}	Audio (I ² S, LJ, RJ and TDM)
DPO4AUTO	Automotive (CAN, LIN)
DPO4-AUTOMAX	Automotive (CAN, LIN, FlexRay)
DPO4COMP	Computer (RS-232)
DPO4EMBD ^{*3}	Embedded (I ² C, SPI)
DPO4ENET	Ethernet (10Base-T, 100Base-Tx)
DPO4USB ^{*4}	USB 2.0 (LS, FS, HS)
DPO4PWR	Power Analysis
DPO4LMT	Limit and Mask Testing
DPO4VID	HDTV & Custom Video Triggering

Recommended Probes

Passive Voltage Probes

TPP1000	1 GHz, 300 V CAT II
TPP0502	2X, 500 MHz, 300 V CAT II

Active Voltage Probes

TAP1500	10X, 1.5 GHz, ± 8 V
---------	-------------------------

Differential Voltage Probes

TDP0500	500 MHz, ± 42 V/ ± 4.25 V
TDP1000	1 GHz, ± 42 V/ ± 4.25 V

High Voltage Probes

TMDP0200	200 MHz, ± 750 V/ ± 75 V
TPP0850	50X, 800 MHz, 2500 V Peak

Current Probes

TCP0030A	120 MHz, 30 A DC/ 30 A RMS/50 A Peak/ 1 mA Min
----------	--

Another Product for Consideration

Working with RF? The MDO4000B Series is the world's only oscilloscope with a built-in spectrum analyzer for capturing and analyzing synchronized analog, digital and RF signals.

Ships with Product

- One TPP0500B (≤ 500 MHz models) or TPP1000 (1 GHz models) Passive Voltage Probe Per Analog Channel
- One P6616 16 Channel Logic Probe (MSO only)
- OpenChoice® Desktop Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Accessory Bag, Power Cord
- 3-year Warranty

^{*1} See the MDO4104B-3 for an MSO + Spectrum Analyzer.

^{*2} Not available on DPO4102B, DPO4102B-L models.

^{*3} For SPI, only 2-wire support is available on DPO4102B, DPO4102B-L.

^{*4} USB 2.0 HS only available on 1 GHz analog bandwidth models.




MSO/DPO5000B Series


Today's faster data rates and tighter timing margins requires an oscilloscope with outstanding signal acquisition performance and analysis capabilities. Tektronix MSO/DPO5000B Series oscilloscopes provide exceptional signal fidelity, with 2 GHz and 10 GS/s sample rate, along with advanced analysis and math capabilities. MSO models include 16 digital timing channels, and all models can be equipped to decode common serial protocols, to provide a comprehensive view of your systems.

Product Highlights

- 350 MHz, 500 MHz, 1 GHz, and 2 GHz models
- >250,000 wfms max. waveform capture rate with FastAcq™ technology
- 10 GS/s max sampling and 250 Mpoints memory (optional)
- Extensive analysis including jitter/timing and user defined math (i.e. MATLAB)
- Visual triggering standard with search and mark



Achieve greater than 11 bits vertical resolution with Hi-Res sampling and reduce unwanted noise while capturing signal details.



Perform advanced protocol triggering and decode on mid-speed and low-speed serial and buses (optional).

Models	Analog Channels	Digital Channels	Analog Bandwidth	Analog Sample Rate (4 Channels/2 Channels)	Digital Sample Rate Main/MagniVu™
DPO5034B	4	--	350 MHz	5 GS/s	--
MSO5034B	4	16	350 MHz	5 GS/s	500 MS/s /16.5 GS/s
DPO5054B	4	--	500 MHz	5 GS/s	--
MSO5054B	4	16	500 MHz	5 GS/s	500 MS/s /16.5 GS/s
DPO5104B	4	--	1 GHz	5 GS/s /10 GS/s	--
MSO5104B	4	16	1 GHz	5 GS/s /10 GS/s	500 MS/s /16.5 GS/s
DPO5204B	4	--	2 GHz	5 GS/s /10 GS/s	--
MSO5204B	4	16	2 GHz	5 GS/s /10 GS/s	500 MS/s /16.5 GS/s

Software Packages

Serial Bus Triggering and Protocol Analysis

SR-AERO	MIL-STD-1553B
SR-AUTO	CAN/LIN/FlexRay
SR-COMP	Computer (RS-232)
SR-DPHY	MIPI D-PHY
SR-EMBD	Embedded (I ² C, SPI)
SR-ENET	Ethernet
SR-USB	USB 2.0 (LS, FS, HS)

Compliance Test

BRR	BroadR-Reach
ET3	Ethernet
MOST	MOST50/150
USB	USB 2.0

Additional Analysis

DDRA	DDR Memory
DJA	Advanced Jitter Analysis
HSIC	HSIC Electrical Characterization
PS2, 3	Power Solution Bundles
PWR	Power Analysis
SVE	SignalVu RF Analysis
USBPWR	USB Power Compliance

Additional software packages are available. For a complete listing, please visit www.tektronix.com/mso5000

Recommended Probes

Passive Voltage Probes

TPP1000	10X, 1 GHz, 300 V CAT II
TPP0502	2X, 500 MHz, 300 V CAT II

Active Voltage Probes

TAP1500	10X, 1.5 GHz, ± 8 V
TAP2500	10X, 2.5 GHz, ± 4 V

Differential Voltage Probe

TDP0500	500 MHz, ± 42 V/± 4.2 V
TDP1000	1 GHz, ± 42 V/± 4.2 V
TDP1500	1.5 GHz, ± 8.5 V/± 850 mV

High Voltage Probes

TMDP0200	200 MHz, ± 750 V/± 75 V
THDP0200	200 MHz, ± 1500 V/± 150 V
THDP0100	100 MHz, ± 6000 V/± 600 V
TPP0850	50X, 800 MHz, 2500 V Peak

Current Probes

TCP0020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min
TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min
TCP0150	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min

Ships with Product

- Four TPP0500B (350 MHz and 500 MHz models) or TPP1000 (1 GHz and 2 GHz models) Passive Voltage Probes
- One P6616 16 Channel Logic Probe (MSO only)
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Accessory Bag, Power Cord
- 1-year Warranty

Instrument Options

Record Length

Opt. 5RL	50M/Ch
Opt. 10RL	125M/Ch

Limitations apply. See data sheet for full details.

Recommended Service

R3	3-year Extended Warranty
R5	5-year Extended Warranty




DPO7000C Series

Complex designs tremble before this oscilloscope. Packed with features like DPX[®] technology for fast waveform capture rates, advanced Pinpoint[®] triggering, and over 30 application software packages, it speeds debug and analysis of performance devices. It's a time-strapped engineer's dream come true.

Product Highlights

- 500 MHz, 1 GHz, 2.5 GHz, and 3.5 GHz models
- Windows 7 Ultimate 64-bit operating system and touch-screen display
- >250,000 wfms max. waveform capture rate with FastAcq[™] technology
- Over 1400 available trigger combinations with Pinpoint[®] triggering
- Automated search and mark for waveform events
- 53 automated measurements and FFT analysis



Includes the DPOJET essentials jitter and eye pattern analysis software package - free.



Over 30 optional software packages available for specialized applications.

Models	Analog Channels	Bandwidth	Record Length (1/2/4 Channels)	Analog Sample Rate
DPO7054C	4	500 MHz	125/50/25 M	20/10/5 GS/s
DPO7104C	4	1 GHz	125/50/25 M	20/10/5 GS/s
DPO7254C	4	2.5 GHz	125/50/25 M	40/20/10 GS/s
DPO7354C	4	3.5 GHz	125/50/25 M	40/20/10 GS/s

Software Packages

Serial Bus Triggering and Protocol Analysis

SR-AERO	MIL-STD-1553B
SR-AUTO	CAN/LIN/FlexRay
SR-COMP	Computer (RS-232)
SR-DPHY	MIPI D-PHY
SR-EMBD	Embedded (I ² C, SPI)
SR-ENET	Ethernet
SR-PCIE	PCI Express
SR-USB	USB 2.0 (LS, FS, HS)

Compliance Test

BRR	BroadR-Reach
ET3	Ethernet
MOST	MOST50/150
USB	USB 2.0

Additional Analysis

DDRA	DDR Memory
DJA	Advanced Jitter Analysis
HSIC	HSIC Electrical Characterization
PS2, 3	Power Solution Bundles
PWR	Power Analysis
SVE	SignalVu RF Analysis
USBPWR	USB Power Compliance

Additional software packages are available. For a complete listing, please visit www.tektronix.com/dpo7000

Recommended Probes

Active Voltage Probes

TAP1500	10X, 1.5 GHz, ± 8 V
TAP2500	10X, 2.5 GHz, ± 4 V
TAP3500	10X, 3.5 GHz, ± 4 V

Differential Voltage Probe

TDP0500	500 MHz, ± 42 V/± 4.2 V
TDP1000	1 GHz, ± 42 V/± 4.2 V
TDP1500	1.5 GHz, ± 8.5 V/± 850 mV
TDP3500	3.5 GHz, ± 2 V

High Voltage Probes

TMDP0200	200 MHz, ± 750 V/± 75 V
THDP0200	200 MHz, ± 1500 V/± 150 V
THDP0100	100 MHz, ± 6000 V/± 600 V

Current Probes

TCP0020	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min
TCP0030A	120 MHz, 30 A DC/30 A RMS/50 A Peak/1 mA Min
TCP0150	20 MHz, 150 A DC/150 A RMS/500 A Peak/5 mA Min

Recommended Service

R3	3-year Extended Warranty
R5	5-year Extended Warranty

Ships with Product

- Four P6139B 500 MHz, 10X Passive Voltage Probes
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Front Panel Cover, Power Cord
- 1-year Warranty

Instrument Options

Record Length

Opt. 5RL	50M/Ch
Opt. 10RL ^{†1}	125M/Ch

Limitations apply. See data sheet for full details.

^{†1} Not available on DPO7054C, DPO7104C

We couldn't make engineering easier. So we made it easier to teach and learn.



The world's first dedicated teaching oscilloscope: the TBS1000B-EDU Series.

Meet the only oscilloscope designed to tackle today's test challenges while preparing tomorrow's engineers for the future. With an exclusive courseware capability, the full-featured TBS1000B-EDU oscilloscopes provide an efficient way for instructors to teach and students to learn fundamental electronic concepts. It's a powerful solution at an affordable price.

Advanced Features	Impressive Benefits
<ul style="list-style-type: none"> ■ Highest sampling accuracy and up to 200 MHz bandwidth 	<ul style="list-style-type: none"> ■ Industry leading sampling technology with 10x oversampling to accurately capture fast signals
<ul style="list-style-type: none"> ■ Integrated courseware 	<ul style="list-style-type: none"> ■ Allows educators to conveniently create and administer lab exercises that are viewable on the scope
<ul style="list-style-type: none"> ■ Auto-set enable/disable 	<ul style="list-style-type: none"> ■ Enables educators to create labs where students can learn basic oscilloscope operation without depending on the Autoset button
<ul style="list-style-type: none"> ■ Courseware online community 	<ul style="list-style-type: none"> ■ An interactive, multilingual community platform where educators can share lab courseware with peers from around the world
<ul style="list-style-type: none"> ■ 34 automated measurement types 	<ul style="list-style-type: none"> ■ The most automatic measurements in its class, for maximum efficiency
<ul style="list-style-type: none"> ■ High-resolution 7" WVGA display 	<ul style="list-style-type: none"> ■ Crystal-clear viewing experience

▶ See it in action at tek.com/tbs1000b-edu.



TBS1000B-EDU Series


Meet the world's first dedicated teaching oscilloscope; the TBS1000B-EDU. Not only does it deliver the performance you expect to see in a Tektronix scope; it also comes with an innovative courseware feature that allows students to review lab material, perform step by step instructions and document results, all on the oscilloscope. We couldn't make engineering easier, so we made it easier to teach and learn.

Product Highlights

- Two channel instruments
- Integrated courseware feature - perform labs directly on the oscilloscope
- Autoset enable/disable capability
- Included PC editor tool for easy lab creation
- Up to 2 GS/s sample rate on all channels
- Dual channel frequency counters
- 34 automated measurements and FFT analysis



The Courseware Resource Center is an interactive, multi-lingual website where educators can share lab material and ideas.



The FFT function can show both frequency and time domain waveforms simultaneously.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate (per channel)
TBS1052B-EDU	2	50 MHz	1 GS/s
TBS1072B-EDU	2	70 MHz	1 GS/s
TBS1102B-EDU	2	100 MHz	2 GS/s
TBS1152B-EDU	2	150 MHz	2 GS/s
TBS1202B-EDU	2	200 MHz	2 GS/s

Recommended Probes

Passive Voltage Probes

TPP0201	10X, 200 MHz, 300 V CAT II
TPP0101	10X, 100 MHz, 300 V CAT II
TPP0051	10X, 50 MHz, 300 V CAT II
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II

High Voltage Probes

P5200A	500X/50X, 50 MHz, ± 1300 V/ ± 130 V
P5100A	100X, 500 MHz, 2500 V Peak
P6015A	1000X, 75 MHz, 20 kV Peak

Recommended Probes

Current Probes

P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min

Recommended Accessories

TEK-USB-488	GPIO-to-USB converter
AC2100	Soft Carrying Case

Another Product for Consideration

Need more analysis features? The TBS1000B models offer the same great performance and include Trendplot™, data logging and limit test capability.

Ships with Product

- Two TPP0xx1 200 MHz, 100 MHz or 50 MHz, Passive Probes
- Certificate of Calibration
- CD with Customer Documentation
- Education CD with Course Editor SW and Lab Examples
- Installation & Safety Manual
- Power Cord
- 5-year Warranty

Help students master the use of an oscilloscope with the included courseware software and labs.




TBS1000B Series


More features, more scope; the TBS1000B is in a class all its own. With up to 200 MHz bandwidth, 34 automated measurements, limit testing, data logging, dual channel frequency counters, waveform trending and sample rates of up to 2 GS/s; the TBS1000B series is designed for extensive monitoring and analysis activities. It can handle everyday test challenges without challenging your budget.

Product Highlights

- Two channel instruments
- Extensive monitoring capability using TrendPlot™ testing
- Pass/Fail analysis with built in waveform limit testing
- Automated data logging feature
- Up to 2 GS/s sample rate on all channels
- Dual channel frequency counters
- Front-panel USB host port and rear-panel USB device port



Use the TrendPlot™ function to evaluate signal behavior over extended time periods.



Thoroughly analyze your waveforms with convenient math tools and 34 automated measurements.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate (per channel)
TBS1052B	2	50 MHz	1 GS/s
TBS1072B	2	70 MHz	1 GS/s
TBS1102B	2	100 MHz	2 GS/s
TBS1152B	2	150 MHz	2 GS/s
TBS1202B	2	200 MHz	2 GS/s

Recommended Probes

Passive Voltage Probes

TPP0201	10X, 200 MHz, 300 V CAT II
TPP0101	10X, 100 MHz, 300 V CAT II
TPP0051	10X, 50 MHz, 300 V CAT II
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II

High Voltage Probes

P5200A	500X/50X, 50 MHz, ± 1300 V/± 130 V
P5100A	100X, 500 MHz, 2500 V Peak
P6015A	1000X, 75 MHz, 20 kV Peak

Recommended Probes

Current Probes

P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min

Recommended Accessories

TEK-USB-488	GPIB-to-USB converter
AC2100	Soft Carrying Case

Another Product for Consideration

Need an oscilloscope that simplifies the way you distribute lab work to students? The TBS1000B-EDU models have many of the same features and include integrated courseware capabilities.

Ships with Product

- Two TPP0xx1 200 MHz, 100 MHz or 50 MHz Passive Probes
- Certificate of Calibration
- CD with Customer Documentation
- Installation & Safety Manual
- Power Cord
- 5-year Warranty




TBS1000 Series

Usually, entry-level instruments are as light in features as they are in price. But Tektronix TBS1000 Series aren't usual instruments. Ideal for students, hobbyists or any person or organization on a tight budget, TBS1000 Series oscilloscopes deliver outstanding performance, including best-in-class digital real-time sampling, pass/fail testing, and familiar, easy-to-use controls. All at a price that's equally impressive.

Product Highlights

- Four channel instruments
- 1 GS/s sample rate on all channels
- 7 inch WVGA high-res display
- 16 automated measurements, and FFT analysis
- Built-in waveform limit testing
- Built-in help system and probe check wizard
- Front-panel USB host port and rear-panel USB device port



Accurately capture signals with at least 10X oversampling on all channels with Digital Real-Time Sampling technology.



Quickly store and transfer your waveforms and settings with the front panel USB port.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate (per channel)
TBS1064	4	60 MHz	1 GS/s
TBS1104	4	100 MHz	1 GS/s
TBS1154	4	150 MHz	1 GS/s

Recommended Probes

Passive Voltage Probes

TPP0201	10X, 200 MHz, 300 V CAT II
TPP0101	10X, 100 MHz, 300 V CAT II
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II

High Voltage Probes

P5200A	500X/50X, 50 MHz, ± 1300 V/ ± 130 V
P5100A	100X, 500 MHz, 2500 V Peak
P6015A	1000X, 75 MHz, 20 kV Peak

Recommended Probes

Current Probes

P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min
TCP2020A	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min

Recommended Accessories

1103	TEKPROBE Power Supply
AC2100	Soft Carrying Case

Another Product for Consideration

Need a Life Time Warranty? The TDS2000C Series offers the same great performance as the TBS1000 and includes a Lifetime Warranty.

Ships with Product

- Four TPP0x01 100 MHz or 200 MHz, 10X Passive Probes
- OpenChoice® Desktop Software
- Educator Classroom and Lab Resource CD
- Calibration Certificate, Quick Reference Manual, & Documentation on CD
- Power Cord
- 5-year Warranty



THS3000 Series


Affordable performance in a rugged, portable design. This handheld, battery-powered oscilloscope is packed with features and analysis tools. With up to 5 GS/s sampling rate and four isolated channels that can measure up to 1000 Volts you can quickly, reliably and accurately evaluate your signal characteristics on the bench or in the field.

Product Highlights

- 4 fully isolated and floating channels
- 21 automated measurements
- 600 VRMS CAT III, 1000 VRMS CAT II rated inputs
- Measurement data logging with Trendplot™ testing
- 7 hours of continuous battery operation



Four isolated input channels easily handle any type of mixed signal inputs.



User-defined limit testing can automatically monitor your signals and output Pass or Fail results.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate
THS3014	4	100 MHz	2.5 GS/s
THS3014-TK	4	100 MHz	2.5 GS/s
THS3024	4	200 MHz	5 GS/s
THS3024-TK	4	200 MHz	5 GS/s

Recommended Probes

Passive Voltage Probes

THP0301 - 300 MHz, 10X,
Y/B/M/G 300 V CAT III

High Voltage Probes

P5150¹ 50X, 500 MHz, 2500
V Peak, 1000 V RMS
CAT II

P5122 100X, 200 MHz,
1000 V RMS CAT II

Current Probes

P6021A 60 MHz, 10.6 A
RMS/250 A Peak/10
mA Min

P6022 120 MHz, 4 A
RMS/100 A Peak/1
mA Min

A621 5 Hz to 50 kHz, 1000 A
RMS/2000 A Peak/10
mA Min

A622 100 kHz, 100 A DC/71
A RMS/100 A Peak/10
mA Min

TCP2020A 50 MHz, 20 A DC/20
A RMS/100 A Peak/10
mA Min

¹The P5150 is compatible with THS oscilloscopes, but 50X vertical scaling is not offered.

Recommended Accessories

THSBAT	Additional Spare Battery
THSCHG ²	Battery Charger
119-7900-00	AC Power Adapter

² Does not include AC power adapter.

Recommended Service

SILV400	5-year Extended Warranty
---------	--------------------------

Another Product for Consideration

For very accurate ripple measurements on high voltage signals, the P5122 probe offers high impedance with minimal capacitive loading.

Ships with Product

- Four THP0301-Y/B/M/G 300 V CAT III, 300 MHz 10X Passive Probes
- OpenChoice® Desktop Software
- USB-A to Mini USB-B Cable for PC Communication
- Lithium-ion Battery with 7 Hour Battery Life
- Calibration Certificate, Installation/Safety Manual, Documentation on CD
- Carrying Handle, Hanging Strap
- ACHHS Soft-sided Carry Case³, AC Power Adapter with Power Cord
- Hard-sided Travel Case⁴
- Soft-sided Probe Case, Two Probe Replacement Accessory Kits⁴
- 3-year Warranty

³ Non-TK models only, ⁴ TK models only




TPS2000B Series

Great performance goes beyond the lab. Make floating or differential measurements with up to four isolated channels. Tackle challenging environments with backlit buttons and optional power analysis software. Capture signals with Digital Real-Time Sampling.

Product Highlights

- 10x oversampling on all channels
- 4 isolated analog channels
- 11 automated measurements and FFT analysis
- Optional power analysis software



Safely and easily make floating measurements with the four isolated channels.



Battery pack gives you up to 4 hours of portable operation. Hot-swap the pack for 4 more hours!

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate
TPS2012B	2	100 MHz	1 GS/s
TPS2014B	4	100 MHz	1 GS/s
TPS2024B	4	200 MHz	2 GS/s

Application Modules

TPS2PBN2D2 TPS2PWR1 Module and Four P5122 Probes

TPS2PWR1 Power Measurement and Analysis Module

Recommended Accessories

1103 TEKPROBE Power Supply

AC2100 Soft Carrying Case

TPSBAT Additional Lithium-Ion Battery Pack (one included standard with instrument)

TPSCHG External Battery Charger

Recommended Service

SILV200 5-year Extended Warranty

Recommended Probes

Passive Voltage Probes

TPP0201 10X, 200 MHz, 300 V CAT II

TPP0101 10X, 100 MHz, 300 V CAT II

P2220 10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II

High Voltage Probes

P5150 50X, 500 MHz, 2500 V Peak, 1000 V RMS CAT II

P5122 100X, 200 MHz, 1000 V RMS CAT II

Current Probes

P6021A 60 MHz, 10.6 A RMS/250 A Peak/10 mA Min

P6022 120 MHz, 4 A RMS/100 A Peak/1 mA Min

A621 5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min

A622 100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min

TCP2020A 50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min

Another Product for Consideration

For very accurate power measurements, the PA1000 Power Analyzer offers 0.05% basic accuracy.

Ships with Product

- One TPP0101 100 MHz, 10X Passive Probe Per Analog Channel (TPS2012B & TPS2014B)
- One TPP0201 200 MHz, 10X Passive Probe Per Analog Channel (TPS2024B)
- OpenChoice® Desktop and NI LabVIEW SignalExpress™ TE (LE version) Software
- RS-232 to USB Adapter Cable
- One Lithium-Ion Battery with 4-hour Battery Life
- Calibration Certificate, Quick Reference Manual, & Documentation on CD
- Front Panel Cover, AC Adapter with Power Cord
- 3-year Warranty



TDS2000C Series

Big performance has never been so small. Featuring Digital Real-Time Sampling, you can trust your scope to accurately capture your signal. Add in USB connectivity, 16 automated measurements and even a built-in help system, this compact oscilloscope helps you get more done in less time. It's true: big things do come in small packages.

Product Highlights

- 10x oversampling on all channels
- Bright color display
- 16 automated measurements and FFT analysis
- Built-in help system and probe check wizard
- Front-panel USB host port and rear-panel USB device port
- Lifetime Warranty¹



Accurately capture signals with at least 10X oversampling on all channels with Digital Real-Time Sampling technology.



Easily check if your waveforms pass or fail your specifications with built-in waveform limit testing.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate
TDS2001C	2	50 MHz	500 MS/s
TDS2002C	2	70 MHz	1 GS/s
TDS2004C	4	70 MHz	1 GS/s
TDS2012C	2	100 MHz	2 GS/s
TDS2014C	4	100 MHz	2 GS/s
TDS2022C	2	200 MHz	2 GS/s
TDS2024C	4	200 MHz	2 GS/s

Recommended Probes

Passive Voltage Probes

TPP0201	10X, 200 MHz, 300 V CAT II
TPP0101	10X, 100 MHz, 300 V CAT II
P2220	10X/1X, 200 MHz/6 MHz, 300 V CAT II/150 V CAT II

High Voltage Probes

P5200A	500X/50X, 50 MHz, ± 1300 V/ ± 130 V
P5100A	100X, 500 MHz, 2500 V Peak
P6015A	1000X, 75 MHz, 20 kV Peak

Recommended Probes

Current Probes

P6021A	60 MHz, 10.6 A RMS/250 A Peak/10 mA Min
P6022	120 MHz, 4 A RMS/100 A Peak/1 mA Min
A621	5 Hz to 50 kHz, 1000 A RMS/2000 A Peak/10 mA Min
A622	100 kHz, 100 A DC/71 A RMS/100 A Peak/10 mA Min
TCP2020A	50 MHz, 20 A DC/20 A RMS/100 A Peak/10 mA Min

Recommended Accessories

1103	TEKPROBE Power Supply
AC2100	Soft Carrying Case

Ships with Product

- One TPP0x01 100 MHz or 200 MHz, 10X Passive Probe Per Analog Channel
- OpenChoice® Desktop and NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate, Quick Reference Manual & Documentation on CD
- Power Cord
- Lifetime Warranty¹

¹ For complete details visit www.tektronix.com/lifetimewarranty

TDS2000 Series

The **TDS2000 Series** is one of the most popular oscilloscopes of all time. It has a proven track record and comes with a lifetime warranty. We are pleased to continue to offer it.

For new applications, make sure you learn about: MSO/DPO2000B Series Oscilloscopes



- 70, 100 and 200 MHz models
- 2 or 4 analog channels
- 16 digital channels (MSO models)
- 1 Mpoint record length
- Serial bus decoding and triggering options
- 5 year warranty



TDS3000C Series

Performance meets portability. Featuring up to 500 MHz bandwidth and optional battery-powered operation, this oscilloscope is as capable as it is convenient. Capture fast-changing signals with Digital Real-Time Sampling. Maximize efficiency with WaveAlert® Anomaly Detection and 25 automated measurements. Performance and versatility. Turns out, you can take it with you.

Product Highlights

- 10 kpoints record length on all channels, all the time
- 3,600 wfms/s max. waveform capture rate with DPO technology
- 25 automated measurements and FFT analysis
- Front-panel USB host port and optional rear-panel Ethernet, GPIB, and RS-232 ports



Optional battery pack gives you up to 3 hours of portable operation.



Accurately capture signals with at least 5X over-sampling on all channels with Digital Real-Time Sampling technology.

Models	Analog Channels	Analog Bandwidth	Analog Sample Rate
TDS3012C	2	100 MHz	1.25 GS/s
TDS3014C	4	100 MHz	1.25 GS/s
TDS3032C	2	300 MHz	2.5 GS/s
TDS3034C	4	300 MHz	2.5 GS/s
TDS3052C	2	500 MHz	5 GS/s
TDS3054C	4	500 MHz	5 GS/s

Application Modules

TDS3LIM	Limit Testing
TDS3TMT	Telecom Mask Test Triggering
TDS3VID	HDTV and Custom Video Triggering

Recommended Accessories

1103	TEKPROBE Power Supply
TDS3GV	GPIB, RS-232, and VGA Communications Module
TDS3BATC	Lithium-ion Battery
TDS3ION	Battery Charger
AC3000	Soft Carrying Case
HCTEK4321	Hard Carrying Case (requires AC3000)

Recommended Service

SILV400	5-year Extended Warranty
---------	--------------------------

Recommended Probes

Passive Voltage Probes

P6139B 10X, 500 MHz, 300 V CAT II

Active Voltage Probes

P6243 10X, 1 GHz, ± 8 V

Differential Voltage Probes

P6246¹ 10X/1X, 400 MHz, ± 8.5 V/ ± 850 mV

High Voltage Probes

P5205A 500X/50X, 100 MHz, ± 1300 V/ ± 130 V

P5210A 1000X/100X, 50 MHz, ± 5600 V/ ± 560 V

P5100A 100X, 500 MHz, 2500 V Peak

Current Voltage Probes

TCP202A 50 MHz, 15 A DC/10.6 A RMS/50 A Peak/10 mA Min

¹ Requires 1103 TEKPROBE Power Supply

Ships with Product

- One P6139B 500 MHz, 10X Passive Probe Per Analog Channel
- OpenChoice® Desktop and NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate, Quick Reference Manual, & Documentation on CD
- Front Panel Cover, Power Cord
- 3-year Warranty

TDS3000 Series

The **TDS3000C Series** performs reliably in test stations around the world. It is also available with a battery pack, making it especially well-suited for field applications that require high bandwidth. We are pleased to continue to offer it.

For new applications, make sure you learn about: MDO3000 Series Mixed Domain Oscilloscopes



- 100, 200, 350, 500 MHz, and 1 GHz models
- 2 or 4 analog channels
- 16 digital channels (optional)
- 10 Mpoint record length
- Integrated arbitrary/function generator (optional)
- Serial bus decoding and triggering options



Signal Generators

The definition of versatility, Tektronix signal generators create a virtually unlimited range of standard and custom signals, from sine or pulse to ideal or distorted and anything in between.



	AFG2000	AFG3000C Series
Bandwidth	20 MHz	240 MHz, 100 MHz, 50MHz, 25 MHz, 10 MHz
Channels	1	1 or 2 (independent or synchronized)
Memory Depth	4 x 128 k points	4 x 128 k points
Standard Waveforms	Sine, Sine(x)/x, Square, DC, Ramp, Gaussian, Exponential Decay, Pulse, Lorentz, Noise, Arbitrary, Haversine, Exponential Rise	Sine, Sine(x)/x, Square, DC, Ramp, Gaussian, Exponential Decay, Pulse, Lorentz, Noise, Arbitrary, Haversine, Exponential Rise
Modulation	AM, FM, PM, FSK, PWM, External	AM, FM, PM, FSK, PWM, External
Additional Modes	Sweep, Burst, Add Noise Impairment	Sweep, Burst, Add Noise Impairment

Choosing Your Signal Generator

In electronic test and measurement, more often than not, a signal source is required to generate signals that are not available unless externally provided. Below is a list of common features that you may want to consider when choosing a signal generator for your application.

1 Sample (Clock) Rate

Sample rate, usually specified in terms of megasamples or gigasamples per second, denotes the maximum clock or sample rate at which the instrument can operate. The sample rate affects the frequency of the main output signal. In general, you should choose an instrument where the sampling frequency is twice that of the highest spectral frequency component of the generated signal to ensure accurate signal reproduction. The maximum sample rate also determines the smallest time increment that can be used to create waveforms. Typically this figure is simply the result of the calculation; $T = 1/F$, where T is the timing resolution in seconds and F is the sample rate.

2 Memory Depth (Record Length)

Memory depth, or record length, plays an important role in signal fidelity because it determines how many points of data can be stored to define a waveform. Deeper memory enables you to store more waveform detail and/or more cycles of the desired waveform.

3 Vertical (Amplitude) Resolution

Vertical resolution pertains to the binary word size, in bits, of the instrument's DAC, with more bits equating to higher resolution. The vertical resolution of the DAC defines the amplitude accuracy and distortion of the re-produced waveform. While more is better there is a general trade-off for most arbitrary waveform instruments, the higher the resolution the lower the sample rate.

4 Features and Capabilities

Tektronix signal generators offer a range of features and output capabilities. When choosing your signal generator, you should also evaluate standard waveforms, modulation capabilities, output amplitude and waveform editing software to ensure that the instrument meets your needs.




AFG2000

Usually, generating a range of signals requires investment in a high-end signal generator. Introducing the Tektronix AFG2000. With 20 MHz bandwidth, 14-bit resolution, and 250 MS/s sample rate, the AFG2021 Arbitrary Function Generator can create simple and complex signals. But perhaps its most impressive feature is its entry-level price.

Product Highlights

- 12 standard waveforms – Sine, Square, Pulse, Ramp, Noise, DC, Sine(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay and Haversine
- Arbitrary waveform capability
- AM, FM, PM, FSK, PWM, sweep and burst modes
- Front-panel USB host port and rear-panel USB device port, optional Ethernet and GPIB ports (Opt. GL)



Wide frequency range (1 μ Hz to 20 MHz) supports amplifier and filter testing applications.



Quickly modify, create and transfer waveforms using the included ArbExpress® software.

Models	Analog Channels	Output Bandwidth	Analog Sample Rate	Memory Depth	Amplitude (into 50 Ω)
AFG2021	1	20 MHz	250 MS/s	4 x 128 k	10 mV _{p-p} to 10 V _{p-p}

Recommended Accessories

Cables

012-0482-00 BNC cable shielded, 3 ft.

012-1256-00 BNC cable shielded, 9 ft.

012-0991-00 GPIB cable, double shielded

011-0049-02 50 Ω BNC Terminator

Accessories

RMU2U Rackmount kit

013-0345-00 Fuse adapter, BNC-P to BNC-R

159-0454-00 Fuse set, 3pcs, 0.125 A

Instrument Options

Opt. GL GPIB/LAN Interface (configured at time of purchase)

Recommended Service

SILV200 5-year Extended Warranty

Ships with Product

- User Manual
- Power Cord
- USB Cable
- CD-ROM with Programmer Manual, Service Manual, Labview and IVI Drivers
- CD-ROM with ArbExpress® Software
- NIST-traceable Calibration Certificate




AFG3000C Series


Test complex designs faster with a fully loaded function generator. Featuring 12 standard waveforms, plus arbitrary capability and many modulation options, this generator supports a wide range of application needs. Add in best-in-class performance and 25 shortcut keys and you have a generator that's loaded with features and light on complexity.

Product Highlights

- 12 standard waveforms - Sine, DC, Pulse, Exponential Decay, Sine(x)/x, Ramp, Lorentz, Haversine, Exponential Rise, Square, Gaussian, Noise
- Arbitrary waveform capability
- AM, FM, PM, FSK, PWM modulation, sweep and burst modes
- Front-panel USB host port and rear-panel Ethernet and GPIB ports



Large color display shows your settings and waveforms at a single glance.



Create and modify waveforms with ease with the included ArbExpress® software.

Models	Analog Channels	Output Bandwidth	Analog Sample Rate	Memory Depth	Amplitude (into 50 Ω)
AFG3011C	1	10 MHz	250 MS/s	4 x 128 k	20 mV _{p-p} to 20 V _{p-p}
AFG3021C	1	25 MHz	250 MS/s	4 x 128 k	10 mV _{p-p} to 10 V _{p-p}
AFG3022C	2	25 MHz	250 MS/s	4 x 128 k	10 mV _{p-p} to 10 V _{p-p}
AFG3051C	1	50 MHz	1 GS/s ($\leq 16k$), 250 MS/s ($>16k$)	4 x 128 k	10 mV _{p-p} to 10 V _{p-p}
AFG3052C	2	50 MHz	1 GS/s ($\leq 16k$), 250 MS/s ($>16k$)	4 x 128 k	10 mV _{p-p} to 10 V _{p-p}
AFG3101C	1	100 MHz	1 GS/s ($\leq 16k$), 250 MS/s ($>16k$)	4 x 128 k	20 mV _{p-p} to 10 V _{p-p}
AFG3102C	2	100 MHz	1 GS/s ($\leq 16k$), 250 MS/s ($>16k$)	4 x 128 k	20 mV _{p-p} to 10 V _{p-p}
AFG3251C	1	240 MHz	2 GS/s ($\leq 16k$), 250 MS/s ($>16k$)	4 x 128 k	50 mV _{p-p} to 5 V _{p-p}
AFG3252C	2	240 MHz	2 GS/s ($\leq 16k$), 250 MS/s ($>16k$)	4 x 128 k	50 mV _{p-p} to 5 V _{p-p}

Recommended Accessories

Cables

- 012-0482-00 BNC cable shielded, 3 ft.
- 012-1256-00 BNC cable shielded, 9 ft.
- 012-0991-00 GPIB cable, double shielded

Accessories

- RM3100 Rackmount kit
- 013-0345-00 Fuse adapter, BNC-P to BNC-R
- 159-0454-00 Fuse set, 3pcs, 0.125A

Recommended Service

- SILV400 5-year Extended Warranty

Ships with Product

- Quick-start User Manual
- Power Cord
- USB Cable
- CD-ROM with Specifications and Performance Verification Manual, Programmer Manual, Service Manual, LabView and IVI Drivers
- CD-ROM with ArbExpress™ Software
- NIST-traceable Calibration Certificate



SourceMeter® SMU Instruments

Keithley Instruments SourceMeter® SMU instruments source current or voltage and simultaneously measure current, voltage and resistance with high speed and accuracy. SourceMeter® SMU instruments offer a smart alternative to separate power supplies and DMMs, saving money and limited test bench space.



	Model 2450 Touchscreen SourceMeter® SMU Instrument	Series 2400 Bench SourceMeter® SMU Instruments	Series 2600B System SourceMeter® SMU Instruments	2650A High Power System SourceMeter® SMU Instruments
Channels	1	1	1-2 (optional expansion to 64 via TSP-Link®)	1 (optional expansion to 32 via TSP-Link®)
Accuracy	6½-digit measurements	6½-digit measurements	6½-digit measurements	6½-digit measurements
Max. Readings / Second	3,000	2,000	20,000	38,500 1µSec/pt., 18-bit digitizer
Interface	GPIO, USB 2.0, LXI/Ethernet, Digital I/O	GPIO, RS-232, Digital I/O	GPIO, LAN (LXI), USB, RS-232, Digital I/O	GPIO, LAN (LXI), RS-232, Digital I/O
Application Features	Capabilities of analyzers, curve tracers, and I-V systems at a fraction of their cost; touchscreen and icon menu system; built-in graphing	Convenient DMM-like user interface; 2/4/6 wire resistance with force I or V source modes, V-Force from 1ΩV to 1.1KV, 10pA to 5A cont., 10A pulsed, 2W to 110W	True multi-channel parallel test via TSP-Link. Up to 0.1 fA resolution.	2 pairs of A/D converters for simultaneous V and I measurement; up to 2000W pulsed power
Test Sequencing / Scripting	TSP® (Test Script Processing) technology embeds complete test programs inside the instrument for unmatched system-level speed	Built-In ramp generator and list sweep modes, 100 point global machine state sequencer for fast test setup and execution	TSP® (Test Script Processing) technology embeds complete test programs inside the instrument for unmatched system-level speed	TSP® (Test Script Processing) technology embeds complete test programs inside the instrument for unmatched system-level speed
Included Software	Test Script Builder and KickStart Startup Software, LabVIEW and IVI Drivers.	LabTracer 2.0 I-V curve utility and IVI and LabVIEW drivers included.	Built-in, web browser-based characterization software, IVI, LabVIEW, and ICCAP drivers.	Built-in, web browser-based characterization software, IVI, LabVIEW, and ICCAP drivers.

Choosing Your Source Measure Unit (SMU) Instrument

A SMU instrument integrates precision power supply and digital multimeter (DMM) capabilities in one instrument while covering a wide dynamic range. SMUs source and measure simultaneously, making them ideal for characterizing and testing semiconductors and other non-linear devices and materials.

1 System-Level Speed or Throughput

The true measure of speed is how quickly a final measurement or set of measurements (such as a suite of current vs. voltage parameters) is returned to the PC controller. This involves not only the number of readings/second, but also range and function change times.

2 Sourcing Resolution and Output Stability

An SMU's usable maximum resolution depends on its overall accuracy and the resolution of its analog-to-digital converter (ADC). In general, the higher the resolution is, the higher the bit count on the ADC and the higher the accuracy will be.

3 Measurement Settling Time, Offset Error, and Noise

When choosing between instruments, compare the time it takes a SMU to settle the specified offset error. This can be seen in the "bumpiness" of the resulting data curve which indicates measurement noise; the smoother the data curve the less measurement noise. SMUs having a fast, flat, and noise-free settling time achieve more consistent results during a series of measurements taken over time.

4 Cabling

Triaxial cables offer significant advantages over coaxial cables when making low current measurements. Triaxial cables have an extra shield that ensures lower leakage, better response, and greater noise immunity.



Model 2450 Advanced Touchscreen SourceMeter® SMU Instrument

Touch, Test, Invent™ with the intuitively smart, interactive SMU Instrument. The Model 2450 SMU Instrument is an innovative, compact I-V solution that offers the capabilities of I-V systems, curve tracers, and semiconductor analyzers at a fraction of their cost. With the intuitive touchscreen and icon-based control that novice SMU users can appreciate and the exceptional versatility that experienced users need, the Model 2450 enables users to learn faster, work smarter, and invent easier. Its user experience, performance, and application versatility, combined with proven Keithley precision and accuracy, will make the 2450 the favorite go-to instrument in the lab for years to come.

A Smart Toolkit Beyond the Touchscreen

Speed, ease-of-use, and learnability don't stop with the 2450 advanced touchscreen. Its front panel features a context-sensitive HELP system, rotary navigation/control knob, front/rear input selector button, and banana jacks for basic bench applications. A USB 2.0 memory I/O port makes it easy to store data, save instrumentation configurations, load test scripts, and upgrade the system.

Product Highlights

- Highly flexible, source and sink (four-quadrant) operation simultaneously measures voltage, current, and resistance in a single, integrated I-V instrument
- Advanced, five-inch touchscreen user interface with multi-point, pan-pinch-zoom-swipe operation minimizes the learning curve and improves productivity
- Graphical interface provides I-V curve tracing functionality for much less than the cost of traditional curve tracers
- Lower current and voltage measurements ranges (100nA, 10nA, 20mV) reduce need for additional expensive low level instruments
- Front panel banana jack inputs and rear panel triaxial connections optimize signal integrity and convenience and save money on adapter accessories
- PC-based instrument and control software enables instrument control without programming hassles
- KickStart non-programming software for quick I-V testing



Home page advanced source and measure display enables faster speed to answer.



Icon-based, flat menu system can reduce configuration steps by 50% and eliminates cumbersome, multi-layer menu structures.

The Model 2450 is ideal for I-V functional test and characterization of a wide range of today's modern devices, including:

- Semiconductors
- LEDs
- Solar Cells
- Nanomaterials and Devices
- Graphene
- Printed/Flexible Electronics
- Batteries/Electrochemistry
- Sensors
- Biotechnology



Model 2450 Advanced Touchscreen SourceMeter® SMU Instrument

Trusted Precision, Accuracy, and Performance

The 2450 is based on the trusted analog performance of Keithley's Model 2400 SourceMeter SMU Instrument and offers a highly flexible, four-quadrant voltage and current source/load coupled with precision voltage and current meters. This fourth-generation member of Keithley's award-winning SMU family provides the superior precision, resolution, accuracy, and dependability that users have come to expect from Keithley SMU instruments.



With significantly lower wideband noise than its closest competitor, the 2450 is the perfect solution for I-V testing of next-generation devices.

Ships with Product

- 8608 High Performance Test Leads
- USB-B-1 USB Cable, Type A to Type B, 1m (3.3 ft)
- CS-1616-3 Safety Interlock Mating Connector
- CA-180-3A TSP-Link®/Ethernet Cable Documentation CD
- 2450 QuickStart Guide
- Test Script Builder Software (supplied on CD)
- KickStart Startup Software (supplied on CD)
- LabVIEW® and IVI Drivers (supplied on CD)

Model	Current Max / Min	Voltage Max / Min	Power
2450	1A / 10fA	200V / 10nV	20W
2450-NFP (with No Front Panel)	1A / 10fA	200V / 10nV	20W
2450-RACK (without Handle)	1A / 10fA	200V / 10nV	20W
2450-NFP-RACK (with No Front Panel or Handle)	1A / 10fA	200V / 10nV	20W

Recommended Service

2450-3Y-EW	1 Year Factory Warranty extended to 3 years from date of shipment
2450-5Y-EW	1 Year Factory Warranty extended to 5 years from date of shipment
C/2450-3Y-17025	KeithleyCare® 3 Year ISO 17025 Calibration Plan
C/2450-3Y-DATA	KeithleyCare 3 Year Calibration w/Data Plan
C/2450-3Y-STD	KeithleyCare 3 Year Std. Calibration Plan
C/2450-5Y-17025	KeithleyCare 5 Year ISO 17025 Calibration Plan
C/2450-5Y-DATA	KeithleyCare 5 Year Calibration w/Data Plan
C/2450-5Y-STD	KeithleyCare 5 Year Std. Calibration Plan




Product Highlights

- Wide I-V range from 1100V to 100nV and 10.5A pulse to 1pA
- 4-quadrant design simultaneously measures voltage, current, and resistance
- Remote sense on V-source and measure plus guarded ohms mode
- Built-In test sequencer
- Includes LabTracer 2.0 I-V curve utility and IVI and LabVIEW drivers
- Standard GPIB and RS-232 interfaces; Banana (front / rear) Connectors



Series 2400 SourceMeter® SMU Instruments

Series 2400 SourceMeter® SMU instruments are single-channel models with I-V capability from 1100V to 100nV and 10.5A pulse to 1pA. They offer a smart alternative to separate power supplies and digital multimeters (DMMs) and provide a convenient DMM-like user interface.



Model 2400 four-quadrant operation characteristics, a feature of all SourceMeter SMU instruments.



Free LabTracer2 software for remote control and data sharing for applications ranging from the simple to complex.

Model	Current Max / Min	Voltage Max / Min	Power
2400 / 2401	1.05A / 10pA	200V/1μV (20V 2401)	20W
2420 / 2425 / 2440	5.25A / 100pA	100V/1μV	60W/100W/50W
2410	1.05A / 10pA	1100V/1μV	20W
2430	10.5A pulse / 100pA	200V/1μV	1100W

Recommended Service

C/2400-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2400*

C/2401-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Model 2401*

C/2410-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2410*

C/2420-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2420*

C/2425-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2425*

C/2430-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2430*

C/2440-3Y-17025 (ISO-17025 accredited) calibrations within 3 years of purchase for Models 2440*

Ships with Product

- Model 8605 Test Leads
- LabVIEW Software Driver (downloadable)
- LabTracer Software (downloadable)
- Calibration Certificate (Basic)
- Manual CD
- Power Cord
- Warranty

*Not available in all countries.



Series 2600B System SourceMeter® SMU Instruments

Series 2600B SourceMeter® SMU instruments are the industry's most powerful, fastest, and highest resolution SMU instruments. Now they're easier than ever to use with USB 2.0 connectivity, Model 2400 software emulation, and Java-based plug & play test software. Series 2600B models offer the industry's widest dynamic range: 10A pulse to 0.1fA and 200V to 100nV.

Product Highlights

- 4-quadrant design simultaneously sources and measures voltage, current, and resistance
- TSP® (embedded Test Script Processor) architecture enables industry-best system-level speed
- TSP-Link® for true SMU-per-pin and parallel test
- Built-in software for quick and easy I-V test through web browser
- GPIB, LAN (LXI), USB and RS-232



Built-in, Java-based test software runs directly from any web browser to boost productivity.



TSP technology executes complete test programs from the 2600B's non-volatile memory.

Model	Current Max / Min	Voltage Max / Min	Max readings / sec	No. of Channels
2601B	3A DC, 10A pulse/100 fA	40V/100nV	20,000	1
2602B	3A DC, 10A pulse/100 fA	40V/100nV	20,000	2
2604B	3A DC, 10A pulse/100 fA	40V/100nV	20,000	2
2611B	1.5A DC, 10A pulse/100 fA	200V/100nV	20,000	1
2612B	1.5A DC, 10A pulse/100 fA	200V/100nV	20,000	2
2614B	1.5A DC, 10A pulse/100 fA	200V/100nV	20,000	2
2634B	1.5A DC, 10A pulse/1fA	200V/100nV	20,000	2
2635B	1.5A DC, 10A pulse/0.1 fA	200V/100nV	20,000	1
2636B	1.5A DC, 10A pulse/0.1 fA	200V/100nV	20,000	2

Recommended Accessories

2600-BAN	Banana Test Leads Adapter
8606	Probe Kit for 2600-BAN
2600-Std-Res	Calibration Standard 1G ohm Resistor

Recommended Service

26XXB-3Y-EW_	3 Year KeithleyCare Gold Plan
26XXB-5Y-EW_	5 Year KeithleyCare Gold Plan
C/26xxB-3Y-XXXX	Calibration Service 3 Years (17025 or DATA or STD)
C/26xxB-5Y-XXXX	Calibration Service 5 Years (17025 or DATA or STD)

Ships with Product

- Operators and Programming Manuals
- 2600-ALG-2: Low Noise Triax Cable with Alligator Clips, 2m (6.6 ft.) (two supplied with 2634B and 2636B, one with 2635B)
- 2600-Kit: Mating Screw Terminal Connectors with strain relief and covers (2601B/2602B/2604B/2611B/2612B/2614B)
- CA-180-3A: TSP-Link/Ethernet Cable (two per unit)
- TSP Express Software Tool (embedded)
- Test Script Builder Software (supplied on CD)
- LabVIEW Driver
- ACS Basic Edition Software (optional)



2650A High Power System SourceMeter® SMU Instruments


The high current Model 2651A and high voltage Model 2657A High Power System SourceMeter SMU instruments address such applications as testing power semiconductor devices, including diodes, FETs, and IGBTs, as well as characterizing newer materials such as gallium nitride, silicon carbide, and other compound semiconductor materials or devices.

Product Highlights

- Source and measure up to 3kV or 50A pulse, with best-in-class low current resolution
- Up to 2000W pulse or 200W DC power per instrument
- Optimized for characterizing and testing high power semiconductors, electronics, and materials



TSP and TSP-Link technology enables SMU per-pin-parallel testing without the channel limits of a mainframe-based system.



The dual digitizing A/D converters sample at up to 1μs/point, enabling full simultaneous characterization of both current and voltage waveforms.

Model	Power Characteristics	4 Quadrant Source or Sink Capabilities	Resolution	Applications
2651A	Up to 50A (or 100A with 2 units) and up to 2000W pulse / 200W DC power	Up to ±40V and ±50A	100fA/1μV resolution	High Current, High Power Device Testing
2657A	Up to 3,000V and up to 180W of power	Up to 3000V @ 20mA or 1500V @ 120mA	1fA/100μV resolution	High Voltage, High Power, Low Current Device Testing

Recommended Accessories

2600-KIT	Low Impedance Cable Assemble, 1m (3.3 ft)
ACS-BASIC	Component Characterization Software
4299-6	Rack Mount Kit
8011	Test Socket Kit
8010	High Power Device Test Fixture (Model 2657A)
2657A-LIM-3	Low Interconnect Module (Model 2657A)
2657A-PM-200	200V Protection Module (Model 2657A)
SHV-CA-553-2	High Voltage Triax to SHV Cable (1, 2, 3m) (Model 2657A)
HV-CA-554-2	High Voltage Triax to Triax Cable (0.5, 1, 2, 3m) (Model 2657A)
HV-CA-571-3	High Voltage Triax to Unterminated Cable (Model 2657A)
HV-CS-1613	High Voltage Triax Feedthrough Connector (Model 2657A)

Recommended Service

2651A-3Y-EW	3 Year KeithleyCare Gold Plan
2657A-3Y-EW	3 Year KeithleyCare Gold Plan
C/2651A-3Y-STD	KeithleyCare 3 Yr Std Cal Plan
C/2657A-3Y-STD	KeithleyCare 3 Yr Std Cal Plan
C/2651A-5Y-STD	KeithleyCare 5 Yr Std Cal Plan
C/2657A-5Y-STD	KeithleyCare 5 Yr Std Cal Plan

Ships with Product

- 7709-308A Digital I/O and Interlock Connector
- CA-180-3A TSP-Link/Ethernet Cable
- Documentation CD
- Software Tools and Drivers CD
- 2651A-KIT-1A: Low Impedance Cable Assembly (1m) (Model 2651)
- CS-1592-2: High Current Phoenix Connector (male) (Model 2651)
- CS-1626-2: High Current Phoenix Connector (female) (Model 2651)
- CA-557-1: Sense Line Cable Assembly (1m) (Model 2651)



Power Analyzers

Fully characterize your power-electronics design from input to output with Tektronix power analyzers. Designed for precision measurement of power-electronics circuits and devices, these analyzers give you what you need to measure conversion efficiency and perform compliance testing on single-phase or 3-phase devices.



	PA4000 Multi-Channel	PA1000 Single-Phase
Multi-Channel Power Analyzer	PA4000_1CH, PA4000_2CH, PA4000_3CH, PA4000_4CH	PA1000
Power Input Modules	1 – 4 (factory configured)	1
Basic Accuracy (V & I)	0.01% of reading + 0.04% of range (45-850 Hz)	0.05% of reading + 0.05% of range
Measurement Bandwidth	DC, 0.1 Hz - 1 MHz	DC, 0.1 Hz - 1 MHz
Voltage Range	2V peak to 2000V peak	10V peak to 1000V peak
Current Range (internal shunts)	0.00025 A to 30 A RMS	0.0002 A to 20A RMS

Choosing Your Power Analyzer

Power analyzers are used for testing a wide range of power-electronics devices, from cell-phone chargers to 1000kW grid-connected inverters. To help you choose the best analyzer for your application, consider the criteria below.

1 Number of Inputs

Power analyzers are available in both fixed configurations (typically single-channel) and modular configurations. If your application is limited to single-phase devices, a single-channel analyzer may meet your needs. But if you need to measure conversion efficiency on these devices, a two-channel analyzer is required.

Testing of 3-phase devices of course requires a multi-phase analyzer. In many cases, two channels will be all you need for a two-wattmeter measurement on 3-wire inputs or outputs. A four-channel analyzer can measure both input and output simultaneously, to determine conversion efficiency.

2 Measurement Bandwidth

How much bandwidth is enough? The measurement bandwidth you need is usually determined by the switching speed of the device-under-test, or the highest-order harmonic that you are testing requires. Switching speeds of tens or hundreds of kHz are common in today's designs. But new semiconductor technologies promise to increase speeds up to 2x or more in the near future. Choose an analyzer that is capable of measuring your highest frequencies of interest, with some headroom for future-proofing.

3 Compliance Testing for Regulatory Standards

If your application requires you to know that your device is

compliant with regulatory standards such as IEC61000 for harmonics, or ENERGY STAR™ for energy efficiency, you need an analyzer capable of meeting the test requirements specified by the standard. Even better, look for an analyzer supported by software applications that can automate instrument setup and reporting of test results in the exact format required for your application.

4 Current Shunts: Internal or External?

Will you be measuring milliamperes, or hundreds of amperes? Power analyzers vary in the features they offer for direct current inputs or connection to external current transducers. Ideally, the analyzer should have internal current shunts that allow you to connect your device directly, for best accuracy. If you will be testing a range of devices at different power levels, you may value both high and low-range shunts. Finally, if your application requires external current transducers (usually required for current >30Amps), make sure there are transducers available that are well-matched to the analyzer and offer the accuracy you need.

5 Remote Communication

Will you have a need to control the analyzer remotely, or transfer measurement data to your PC? If so, you will want to look for an instrument that features the communication ports you need. Depending on the analyzer model, some ports may be standard features or extra-cost options; be careful to choose the right instrument configuration that meets your requirements.



PA1000 Power Analyzer

The Tektronix PA1000 is your best choice for making precision power measurements on single-phase power supplies and all types of products connected to the AC line. Whether you need to test for compliance with energy-usage regulations such as ENERGY STAR™, or simply need to characterize your product's overall power-conversion performance and efficiency, you will find the PA1000 offers the most modern and complete test solution with performance and features unmatched by other single-phase analyzers.

Product Highlights

- 0.05% basic reading accuracy
- Dual shunts maximize accuracy for low and high current measurements
- USB, Ethernet and GPIB interfaces.
- PWRVIEW PC software for measurement and control. Includes IEC62301 Ed.2 standby power.
- Harmonics, Inrush and Energy (W-h) measurements.



Color display for 4 or 14 measurements and waveform, harmonics and energy trend graphics.



PWRVIEW PC software for measurement and control. Includes IEC62301 Ed.2 standby power measurement reporting.

Model	Description	Basic Accuracy (V & I)	Voltage Input Range	Current Range (internal shunts)
PA1000	PA1000 Single-Phase Power Analyzer	0.05% (45-850 Hz)	10V peak to 1000V peak	0.0002 A to 20A RMS

Recommended Accessories

CL200	Current Clamp, 0.5A - 200A, for Tektronix Power Analyzers
CL1200	Current Clamp, 0.1A - 1000A, for Tektronix Power Analyzers
BALLAST-CT	Differential current transformer for lighting applications. 1A, 1MHz
BB1000-XX	Breakout Box simplifies connections to AC power cords. NA, EU and UK versions.
PA-LEADSET	Replacement Lead Set for Tektronix Power Analyzers (One Channel Lead Set)

Recommended Service

C3	Calibration Service 3 Years
C5	Calibration Service 5 Years
D1	Calibration Data Report
D3	Calibration Data Report 3 Years (with Opt. C3)
D5	Calibration Data Report 5 Years (with Opt. C5)

Ships with Product

- Lead Set
- User Manual
- AC Power Cord
- Certificate of Traceable Calibration
- 5-year Product Warranty

Available for Free Download

- PWRVIEW PC Software for remote instrument setup, data transfer and offline analysis
- Application notes, whitepapers and videos at: www.tek.com/application/power-measurement



BB1000-NA Breakout Box



PA4000 Power Analyzers

Tektronix PA4000 Power Analyzers provide you with highly accurate power, energy and efficiency measurements. Precisely-matched inputs and advanced signal processing deliver high measurement accuracy, even when power is distorted or noisy. The PA4000 performs all power measurements – and harmonics analysis, application-specific measurements, PC interfaces, and dual patent-pending Spiral Shunt™ current shunts per channel are all standard features. PWRVIEW for data transfer and PC analysis is available to download free from tektronix.com.

Product Highlights

- 1 to 4 input modules with precision phase-matched V & I inputs, 1000 Vrms, 30 Arms direct input
- Measurement BW: DC to 1 MHz
- 0.01% basic accuracy
- Application specific test modes for Motor Drives, Ballasts, Standby Power and Energy Integration
- Harmonics measurement to 100th harmonic
- Full-color TFT display with waveform graphics, vector, bar chart, trend



Each input module features both high- and low-range current shunts.



USB, Ethernet and RS-232 ports are standard.

Model	Description	Basic Accuracy (V & I)	Voltage Input Range	Current Range (internal shunts)
PA4000 1CH	PA4000 Power Analyzer with 1 input module	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms
PA4000 2CH	PA4000 Power Analyzer with 2 input modules	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms
PA4000 3CH	PA4000 Power Analyzer with 3 input modules	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms
PA4000 4CH	PA4000 Power Analyzer with 4 input modules	0.01% (45-850 Hz)	2V peak to 2000V peak	0.00025 A to 30 Arms

Recommended Accessories

CT-60-S	Fixed-Core Current Transducer, High Accuracy, up to 60A
CT-200-S	Fixed-Core Current Transducer, High Accuracy, up to 200A
CT-400-S	Fixed-Core Current Transducer, High Accuracy, up to 400A
CT-1000-S	Fixed-Core Current Transducer, High Accuracy, up to 1000A (requires external power supply)
CT-100-M	Fixed-Core Current Transducer, Hall Effect, up to 100A
CT-200-M	Fixed-Core Current Transducer, Hall Effect, up to 200A
CT-500-M	Fixed-Core Current Transducer, Hall Effect, up to 500A
CT-1000-M	Fixed-Core Current Transducer, Hall Effect, up to 1000A

Recommended Accessories

CL200	Current Clamp, 0.5A - 200A, for Tektronix Power Analyzers
CL1200	Current Clamp, 0.1A - 1000A, for Tektronix Power Analyzers
BALLAST-CT	Differential current transformer for lighting applications. 1A, 1MHz
BB1000-XX	Breakout Box simplifies connections to AC power cords. NA, EU and UK versions.
PA-LEADSET	Replacement Lead Set for Tektronix Power Analyzers (One Channel Lead Set)

Recommended Service

C3	Calibration Service 3 Years
C5	Calibration Service 5 Years

Ships with Product

- Lead set (1 set per input module)
- User Manual
- AC Power Cord
- Certificate of Traceable Calibration
- 5-year Product Warranty

Available for Free Download

- PWRVIEW PC Software for remote instrument setup, data transfer and offline analysis
- Application notes, whitepapers and videos at: www.tek.com/application/power-measurement



Digital Multimeters

Designed to save time and reduce headaches, Tektronix and Keithley Digital Multimeters are built to do more so you don't have to. Each one is loaded with time-saving features like automated measurements, built-in analysis modes and front-panel shortcut buttons. Keithley's highly regarded high performance digital multimeters (DMMs,) include 7½ or 8½-digit solutions as well as flexible broad-purpose DMMs.



	Keithley Model 2110	Tektronix Model DMM4020	Keithley Models 2000, 2100	Tektronix Models DMM4040/4050	Keithley Models 2001, 2101	Keithley Model 2002
Resolution	5½ digit	5½ digit	6½ digit	6½ digit	7½ digit	8½ digit
Basic Accuracy	0.012%	0.015%	0.0038% (Model 2100) 0.0030% (Model 2000)	0.0035% (DMM4040) 0.0024% (DMM4050)	0.0018%	0.0006%
Optional Switch Functions	Not Applicable	Not Applicable	10 Channel (Model 2000)	Not Applicable	10 Channel	10 Channel
Interface	USB-TMC GPIB Option	RS-232, RS-232 to USB Device Adapter Included	GPIB, RS-232 (Model 2000) USB-TMC (Model 2100)	USB host, RS-232, GPIB, Ethernet, RS-232 to USB Device Adapter Included	GPIB, RS-232 (Model 2101) GPIB (Model 2001)	GPIB

Choosing Your Digital Multimeter

To help you choose the right digital multimeter for your needs, the most common selection criteria are listed below, along with helpful tips for determining your requirements.

1 Resolution

Resolution refers to how fine a measurement a meter can make. By knowing the resolution of a meter, you can determine if it is possible to see a small change in your signal. The terms digits and counts are used to describe a meter's resolution. A 6.5-digit multimeter can display 6 full digits ranging from 0 to 9, and one "half" digit which displays only a 1 or is left blank. A 6.5-digit meter will display up to 1,999,999 counts of resolution.

2 Accuracy

Accuracy is the largest allowable error that will occur under specific operating conditions. In other words, it is an indication of how close the DMM's displayed measurement is to the actual value of the signal being measured. Accuracy is usually expressed as a percent of reading. An accuracy of one percent of reading means that for a displayed reading of 100 volts, the actual value of the voltage could be anywhere between 99 volts and 101 volts.

3 Measurements

Digital multimeters are capable of making a variety of different measurements. A basic DMM typically can measure voltage, current and resistance. Other measurements commonly supported are continuity and diode measurements. Continuity is a quick go/no-go resistance test that distinguishes between an open and a closed circuit. A diode test mode measures the actual voltage drop across a junction. Other possible measurement modes are frequency, period, temperature and capacitance.

4 Extra Channel Capacity

Most of Keithley's DMM's (excluding Models 2100 and 2110) include an option slot located in the rear, to accommodate a scanner card enabling automated multipoint measurements.



Models 2000, 2100, 2110

These cost effective, high precision instruments offer 5.5- and 6.5-digit accuracy and are ideal for a wide range of manual, semi-automatic, and production test applications. They can be used as stand-alone benchtop instruments and as components in test systems.

Product Highlights

- Exceptional 6 1/2-digit measurement integrity with high speed throughput (Model 2000)
- Built-in slot for scanner card (Model 2000)
- 15 built-in measurement functions including thermocouples (Model 2110)
- Full featured DMMs at a value price
- USB Test and Measurement Class (USBTMC) interface (Models 2110 and 2100)



The KI-Tool application for the Model 2100 and Model 2110 provides charting and graphing capabilities without programming.



For multipoint measurement, plug a scanner card into the Model 2000.

Model	Resolution	Basic V DC Accuracy, 1 Year (% Reading + % Range)	Measurements	Interface
2000	6½	0.0030 + 0.0005	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, dB, dBm, Cont., Diode	GPIB, RS-232
2100	6½	0.0038 + 0.0006	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Cont., Diode	USB
2110	5½	0.012 + 0.002	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, dB, dBm, Cont., Diode, Cap., Therm.	USB (GPIB Option)

Recommended Accessories

2000-SCAN	10-channel Scanner Card (Model 2000)
2001-SCAN	10-channel Scanner Card with Two High-speed channels (Model 2000)
2001-TSCAN	9-channel Thermocouple Scanner Card (Model 2000)
5808	Low cost, Single Pin, Kelvin Probes
5805	Kelvin Probes, 0.9m (3ft)
5805-12	Kelvin Probes, 3.6m (12ft)
5809	Low Cost, Kelvin Clip Lead Set

Recommended Accessories

7007-1	Shielded GPIB Cable, 1m (3.3ft)
7007-2	Shielded GPIB Cable, 2m (6.6ft)
KPCI-488LPA	IEEE-488 Interface/Controller for the PCI Bus
KUSB-488B	IEEE-488 USB to GPIB Interface Adapter
4288-1	Single Fixed Rack Mount Kit (Model 2000, 2100)
4299-3	Single Rack Mount Kit (Model 2100 and 2110)
4299-4	Dual Rack Mount Kit (Model 2100 and 2110)

Ships with Product

- Safety Test Leads
- Product CD (Includes Users Manual, Drivers, Etc.)
- USB Cable (Models 2100/2110)
- KI Tool and KI Link Software (Models 2100/2110)
- Calibration Certificate
- Power Cord
- 1-year Warranty
- 3-year Warranty (Model 2110)




Product Highlights

- Measurement functions include temperature, 4-wire resistance, peak detection, low ohms, and Agilent 3458A emulation (Model 2002)
- Built-in slot for scanner card
- Multiple measurement display (Models 2001 and 2002)
- Dry circuit measure function limits test voltage when testing contact or connector resistances (Model 2010)



Add a plug-in scanner card to turn any of these DMMs into a complete scan and measure system.



Use the multiple display capability (Model 2001/2002) to simultaneously display different aspects of one signal.

Models 2001, 2002, 2010

Each Model 2001, 2002, and 2010 digital multimeter (DMM) offers superior measurement precision, sensitivity, and traceability. They also support plug-in scanner cards that allow you to quickly and economically create multi-channel measurement systems.

Model	Resolution	Basic V DC Accuracy, 1 Year (% Reading + % Range)	Measurements	Interface
2001	7½	0.0024 + 0.0004	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Crest, Peak	GPIO
2002	8½	0.0010 + 0.00015	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Crest, Peak	GPIO
2010	7½	0.0024 + 0.0004	Vac, Vdc, Idc, Iac, 2WΩ, 4WΩ, Temp, Freq, Period, Cont., Diode, Therm., Dry Circ.Ω, Ratio	GPIO, RS-232

Recommended Accessories

2000-SCAN	10-channel Scanner Card
2001-SCAN	10-channel Scanner Card with Two Highspeed Channels
2001-TSCAN	9-channel Thermocouple Scanner Card
5805	Kelvin Probes, 0.9m (3ft)
5805-12	Kelvin Probes, 3.6m (12ft)
5808	Low Cost, Single Pin, Kelvin Probes
5809	Low Cost, Kelvin Clip Lead Set
7007-1	Shielded GPIO Cable, 1m (3.3ft)
7007-2	Shielded GPIO Cable, 2m (6.6ft)
KPCI-488LPA	IEEE-488 Interface/Controller for the PCI Bus
KUSB-488B	IEEE-488 USB to GPIO Interface Adapter
4288-1	Single Fixed Rack Mount Kit

Ships with Product

- Model 8605 High Performance Modular Test Leads (Models 2001, 2002)
- Model 1751 Safety Test Leads (Model 2010)
- Option Slot Cover (Models 2001, 2002)
- Calibration Data
- User Manual, Service Manual
- Power Cord
- 1-year Warranty
- 3-year Warranty (Model 2110)



DMM4020

Make measurements, not compromises. Measure a variety of parameters— from volts, ohms and amps to frequency—with one instrument. Save time with front-panel shortcut keys and built-in limit testing. Performance. Reliability. Legendary ease-of-use. One instrument. Looks like you can have it all.

Product Highlights

- 5.5 digit resolution
- Basic V dc accuracy of up to 0.015%
- Volts, ohms, amps and frequency measurements
- Dedicated dc leakage current measurement
- CAT I 1000 V, CAT II 600 V



Make accurate 4-wire resistance measurements with only two test leads!



With the unique dual display, you can measure two different parameters of the same signal from one test connection.

Models	Display	Resolution (Digits)	Measurements	Basic V dc accuracy (% Reading + % Range)
DMM4020	Dual; Numeric	5.5	V ac, V dc, I dc, I ac, Ω, Cont, Diode, Freq	0.015 + 0.004 (yr.)

Recommended Test Leads

Test Leads	
196-3520-xx	Premium Test Leads (TL710 replacement/spare)
TL705	2x4 Wire Ohm 1000V Test Lead
TL725	2x4 Wire Ohm SMD Test Tweezers

Recommended Accessories

Accessories	
ACD4000	Soft Carrying Case
HCTEK-4321	Hard Carrying Case
RMU2U	Rackmount Kit
013-0369-xx	Calibration Fixture 4-terminal short

Recommended Service

SILV100	5-year Extended Warranty
---------	--------------------------

Another Product for Consideration

If you need greater accuracy, the DMM4050 provides 6.5 digits of resolution and up to 0.0024% basic V dc accuracy.

Ships with Product

- One Set TL710 Test Leads
- RS-232 to USB Adapter Cable
- NI LabVIEW SignalExpress™ TE (LE version) Software
- Statement of Calibration Practices
- User Manual & Documentation on CD
- Power Cord
- 3-year Warranty



DMM4040/4050

Meet the multimeter to rule them all. Make a wide range of measurements—from volts, ohms and amps to frequency, temperature and capacitance—with one instrument. Monitor and record measurements over time, or environmental changes with built-in histogram, TrendPlot™ testing and statistics analysis modes. Get unparalleled ease-of-use with a dual display and USB connectivity. Hello, efficiency. Goodbye, complexity.

Product Highlights

- 6.5 digit resolution
- Basic V dc accuracy of up to 0.0024%
- Volts, ohms, amps, frequency and period measurements
- Capacitance and temperature measurements (DMM4050)
- CAT I 1000 V, CAT II 600 V



Make accurate 4-wire resistance measurements with only two test leads!



See how your device is changing over time with built-in analysis modes – TrendPlot™, histograms and statistics.

Models	Display	Resolution (Digits)	Measurements	Basic V dc accuracy (% Reading + % Range)
DMM4040	Dual; Numeric & Graphical	6.5	V ac, V dc, I dc, I ac, Ω , Continuity, Diode, Freq, Period	0.0035 + 0.0005
DMM4050	Dual; Numeric & Graphical	6.5	V ac, V dc, I dc, I ac, Ω , Continuity, Diode, Freq, Period, Temp., Capacitance	0.0024 + 0.0005

Recommended Test Leads

Temperature Probes

TP750	100 Ohm RTD Temperature Probe (DMM4050 only)
-------	--

Test Leads

196-3520-xx	Premium Test Leads (TL710 replacement/spare)
TL705	2x4 Wire Ohm 1000V Test Lead
TL725	2x4 Wire Ohm SMD Test Tweezers

Recommended Accessories

Accessories

ACD4000	Soft Carrying Case
HCTEK-4321	Hard Carrying Case
RMU2U	Rackmount Kit
013-0369-xx	Calibration Fixture 4-terminal short

Recommended Service

SILV100	5-year Extended Warranty
---------	--------------------------

Another Product for Consideration

The PWS DC Power Supply Series is designed to stack with the DMM Series, saving you bench space.

Ships with Product

- One Set TL710 Test Leads
- RS-232 to USB Adapter Cable
- NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- User Manual & Documentation on CD
- Power Cord
- 3-year Warranty



Data Acquisition Systems

Keithley data acquisition systems combine precision measurement, switching, and control into a single, tightly integrated enclosure. They offer affordable alternatives to separate DMMs and switch systems, dataloggers/recorders, plug-in card data acquisition equipment, and VXI/PXI systems.



	Series 2700	Series 3700A
DMM Resolution	6½ Digits	7½ Digits
Switching Density	Up to 80, 2-pole channels (2700/2701) Up to 200, 2-pole channels (2750)	Up to 576, 2-pole channels
Special Features	Front panel DMM jacks, Non-volatile memory buffer, Solid State temperature scanning	USB Flash Drive support, 1 Ohm measure range, Solid State temperature scanning
Switch Features	Up to 40, 2-pole Channels and 12 card options	Up to 96, 2-pole Channels and 10 card options
Interface	GPIB, RS-232 (Models 2700 and 2750) LAN, RS-232 (Model 2701)	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus

Choosing Your Data Acquisition System

Designing the switching for an automated test system demands an understanding of the signals to be switched and the tests to be performed. The following is a cursory look at key decision points in the design of a switching system.

1 Switch Configuration

Multiplex switching can be used to connect one instrument to multiple devices or multiple instruments to a single device. Multiplex switching permits multiple simultaneous connections and sequential or non-sequential switch closures. A matrix switch configuration is the most versatile because it can connect multiple inputs to multiple outputs. The isolated, or independent, switch configuration consists of individual relays, often with multiple poles, with no connections between relays. For scanner (or multiplex) cards, the channel is used as a switched input in measuring circuits or as a switched output in sourcing circuits. For switch cards, each channel's signal paths are independent of other channels.

2 Relay Types

Three key relay types are used. Electromechanical offer the widest power range and a good life and speed at a relatively low cost. Reed relays cost more but offer less contact wear and bounce for a better life and speed than electromechanical. Solid state cost still more, but offer the best life and speed with no contact wear or bounce.

3 Systemization

Connection types found on switch cards include both screw terminals and mass-terminated connectors. At the instrument level, TSPLink master/slave connection offers easy system expansion between Series 3700A mainframes and to connect to Series 2600B SourceMeter instruments.



Series 2700

The Series 2700 System Switch/Multimeter combines precision measurement, switching, and control in a single, tightly integrated enclosure for either rack-mount or bench-top applications used by data loggers. The 2700 Series offers two- and five-slot models, as well as an Ethernet-based model for high speed and long distance communication.

Product Highlights

- 6½-digit measurement engine
- Front panel DMM jacks
- 300 volt isolation between channels and from any channel to ground to maintain signal integrity
- Mass terminated or screw terminal connector options
- Full per-channel card configurability
- Non-volatile memory buffer
- Choice of 12 switch/control plug-in modules



Install up to five switch/control modules in the 2750 mainframe or up to two in the 2700 and 2701 mainframes.



Screw terminals use oversize connectors for easier, mistake-free wiring. Removable terminals available for some models.

Model	Mainframe Size	Interfaces	Resolution (Digits), Accuracy	Advance Measure Functions
2700	2U, ½ Rack	GPIB, RS232	6½ Digits, 0.003%	Temperature, 4-Wire Resistance
2701	2U, ½ Rack	Ethernet, RS232	6½ Digits, 0.003%	Temperature, 4-Wire Resistance
2750	2U, Full Rack	GPIB, RS232	6½ Digits, 0.003%	Temperature, 4-Wire Resistance, Low Ohms

Plug-in Cards

7700	Dual 1x10 / Electromechanical Relay
7701	Dual 1x16 / Electromechanical Relay
7702	Dual 1x20 / Electromechanical Relay
7703	Dual 1x16 / Reed Relay
7705	40 Independent Relay / Electromechanical Relay

Recommended Accessories

7007-1	Shielded IEEE-488 Cable, 1m (2700, 2750)
7007-2	Shielded IEEE-488 Cable, 2m (2700, 2750)
7788	50-Pin D-Shell Connector Kit (for 7703 & 7705 Mods.)
7789	50-Pin/25-Pin D-Shell Kit
7790	50-Pin Male/Female, 25-Pin Male IDC D-Shell Con. Kit

Plug-in Cards

7706	16 Digital I/O, 2 Analog Outputs, 1x20 Multiplexer
7707	32 Digital I/O, 1x10 Multiplexer
7708	Dual 1x20 / Electromechanical Relay
7709	6x8 / Electromechanical Relay
7710	Dual 1x10 / Solid State Relay
7711	Dual 1x4, 2GHz / RF Relay
7712	Dual 1x4, 3.5GHz / RF Relay

Ships with Product

- Product CD (Includes Users Manual, Drivers, Etc.)
- Ethernet Crossover Cable (Model 2701 Only)
- Calibration Certificate
- Quick Reference Manual
- ExcelINX Software
- Power Cord
- 1-year Warranty



Series 3700A

The Series 3700A DMM/switch system offers a scalable, instrument grade switching and multi-channel measurement solution for automated testing of electronic devices. The system includes a high performance DMM with up to six switch/control cards and can support up to 576 two-wire multiplexer channels for unrivaled density and low per channel cost.

Product Highlights

- Mainframe variations (DMM and keypad/display optional)
- High performance (1 Ohm resistance, 10µA DCI range) 7.5 Digit multimeter
- High density switching (Up to 720 one-wire multiplexer channels, 2,688 one-wire matrix crosspoints)
- Optimized for high throughput scanning and pattern switching
- Embedded startup/control software



Use the built-in web server interface to configure the system, build and run an automated scan list, and analyze data.



Model 3706A-NFP eliminates keypad and display for automated test rack applications.

Model (Mainframe)	DMM	Front Panel Keypad & Display	Resolution (Digits), Accuracy	Interface
3706A	Yes	Yes	7½ Digits, 0.0025%	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus
3706A-S	No	Yes	NA	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus
3706A-NFP	Yes	No	7½ Digits, 0.0025%	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus
3706A-SNFP	No	No	NA	GPIB, LAN (LXI), USB-TMC, TSP-Link® Channel Expansion Bus

Plug-in Cards

3720	Dual 1x30 Multiplexer: 300V, 2A, Auto-CJC with 3720-ST accessory
3721	Dual 1x20 Multiplexer: 300V, 3A, Auto-CJC with 3721-ST accessory
3722	Dual 1x48 Multiplexer: 300V, 2A
3723	Dual 1x30 Multiplexer: 200V, 1.25A, Reed Relay
3724	Dual 1x30 Multiplexer: 200V, 0.12A, Solid State Relay, Auto-CJC with 3724-ST accessory

Plug-in Cards

3730	6x16 Matrix: 300V, 2A
3731	6x16 Matrix: 200V, 2A, Reed Relay
3732	Quad 4x28 Matrix: 200V, 1.2A, Reed Relay
3740	Independent Relay: 28 Form C: 300V, 3A; 4 Form A: 250VAC, 7A
3750	Control: 40 Digital I/O 2 Analog Outputs, 4 Counter

Recommended Accessories

3706-BAN	DMM Adapter Cable
3706-TLK	Test Lead Kit
KUSB-488B	IEEE-488 USB to GPIB Interface Adapter
4288-1	Single Fixed Rack Mount Kit
4288-10	Fixed Rear Rack Mount Kit

Ships with Product

- Test Script Builder Software Suite CD
- Series 3700A Product CD (Includes LabVIEW, IVI C, and IVI.COM Drivers)
- Ethernet Crossover Cable
- Calibration Certificate
- Quick Reference Manual
- Power Cord
- 1-year Warranty



Low-Level Instruments

Scientists and researchers worldwide rely on Keithley Electrometers, Picoammeters, and Nanovoltmeters for making low-level measurements beyond the capabilities of a typical digital multimeter. Keithley Electrometers and Picoammeters provide low current and high resistance measurements and Keithley Nanovoltmeters measure low voltages.



	2182A Nanovoltmeter	6220 / 6221 Current Sources	6485 / 6487 / 6482 Picoammeters / Picoammeter & Voltage Source	6514 / 6517B / 6430 Electrometers
Current Min/Max	--	100fA / 100mA	1fA / 20mA	10aA / 100mA
Voltage Min/Max	1nV / 100V	--	--	1mV / 200V
Resistance Min/Max	10nΩ / 1G Ω (with Model 6220 or 6221)	10nΩ/1GΩ (with Model 2182A)	10Ω/1PΩ (with Model 6487)	10mΩ / 10PΩ
Resolution	7½ Digits	4½ Digits	5½ Digits (6485, 6487) 6½ Digits (6482)	5½ Digits (6514, 6517B) 6½ Digits (6430)
Input Connection / Interface	Low Thermal / GPIB, RS-232	3 Slot Triax / GPIB, RS-232 (LAN on 6221)	BNC (6485) 3 Slot Triax (6482, 6487) / GPIB, RS-232	3 Slot Triax / GPIB, RS-232

Choosing Your Specialized Low Level Instrument

To help you choose the appropriate specialized low level instrument for your application, the most common selection criteria are listed below, including helpful tips for determining the correct specialized low level instrument for your requirements.

1 Resolution

Resolution means how fine a meter's measurement is and lets you determine if it's possible to see a small change in the signal. Resolution is described by digits and counts. A 6.5-digit instrument can display six full digits ranging from 0 to 9, and one "half" digit that displays either a 1 or is left blank. A 6.5-digit instrument can display up to 1,999,999 counts of resolution.

2 Accuracy

Accuracy is the largest allowable error that will occur under specific operating conditions and is an indication of how close the instrument's displayed measurement is to the actual value of the signal measured. Accuracy is typically expressed as a percent of reading. For example, an accuracy of 1% of reading means that, for a displayed reading of 100 volts, the actual value of the voltage is between 99 volts and 101 volts.

3 Low Current/High Resistance Measurements

Low current/high resistance measurements evaluate the insulation qualities of materials or components. Typically, a voltage up to 500 or 1000 volts is applied and the resulting current is measured, which can be in the range of picoamperes (10E-12A) or lower. A digital multimeter may seem like the right instrument for these measurements. But if the current is below 1μA or the resistance is above 10MΩ, the correct solution is an Electrometer or Picoammeter.

4 Low Voltage/Low Resistance Measurements

Low resistance/low voltage measurements evaluate the conduction or contact qualities of materials or components. Typically, a current under 100mA but as low as 1μA is applied and the resulting voltage is measured, which can be in the range of microvolts and even nanovolts. For low voltage, choose a Nanovoltmeter or low noise multimeter. For low resistance, a Nanovoltmeter/current source combination or switch/multimeter is the correct solution.



2182A Nanovoltmeter


The two-channel Model 2182A Nanovoltmeter is optimized for making stable, low noise voltage measurements and for characterizing low resistance materials and devices reliably and repeatably. It provides higher measurement speed and significantly better noise performance for voltage meters than alternative low voltage measurement solutions.

Product Highlights

- Low noise voltage measurements at high speeds
- Delta mode coordinates measurements with a reversing current source at up to 24Hz with 30nV p-p noise (typical) for one reading. Averages multiple readings for greater noise reduction
- Built-in thermocouple linearization and cold junction compensation
- Dual channels



Comparison of the Model 2182A's DC noise performance with a nanovolt/micro-ohmmeter's.



Results from a Model 2182A and Model 6220 using the delta mode to measure a 10mΩ resistor with a 20μA test current.

Model	Voltage	Temperature	Resistance	Channels	Buffer Size
2182A	1nV – 100V	-200°C – 1820°C	10nΩ to 200MΩ (requires 6220 or 6221)	2	1,024 rdgs

Recommended Accessories

6220	DC Precision Current Source (used with 2182A for low current/voltage measurement)
6221	AC and DC Current Source (used with 2182A for low current/voltage measurement)
4288-1	Single Fixed Rack Mounting Kit
4288-2	Dual Fixed Rack Mounting Kit
KPCI-488LPA	IEEE-488 Interface/Controller for the PCI Bus
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter
2107-30	Low Thermal Input Cable with spade lugs, 9.1m (30 ft)
2182-KIT	Low Thermal Connector with strain relief
2187-4	Input Cable with safety banana plugs

Recommended Accessories

2188	Low Thermal Calibration Shorting Plug
7007-1	Shielded GPIB Cable, 1m (3.2 ft)
7007-2	Shielded GPIB Cable, 2m (6.5 ft)
7009-5	Shielded RS-232 Cable, 1.5m (5 ft)
8501-1	Trigger Link Cable, 1m (3.2 ft)
8501-2	Trigger Link Cable, 2m (6.5 ft)
8503	Trigger Link Cable to 2 male BNC connectors

Ships with Product

- 2107-4 Low Thermal Input Cable with Spade Lugs, 1.2m (4 ft)
- User Manual
- Service Manual
- Contact Cleaner
- Power Cord
- Alligator Clips




6220 / 6221 Current Sources


Keithley precision current sources include both broad-purpose Model 6220 and high-performance Model 6221. Their high sourcing accuracy and built-in control functions make them ideal for Hall Effect, resistance (using delta mode), pulsed, and differential conductance measurements. Programmable pulse widths limit power dissipation.

Product Highlights

- 10E+14 Ohms output impedance ensures stable current sourcing into variable loads
- 64k-point source memory for comprehensive test current sweeps
- (Model 6221) Source AC currents from 4pA to 210mA peak to peak for AC characterization of components and materials. The 10MHz output update rate generates smooth sine waves up to 100kHz



Perform, analyze, and display differential conductance measurements.



Measurements are line synchronized to minimize 50/60Hz interference.

Model	Current	Resistance	Sweep Points	PC Interface
6220	100fA – 100mA	10nΩ to 200MΩ (requires 2182A)	65,536 (64k)	GPIB, RS-232
6221	100fA – 100mA	10nΩ to 200MΩ (requires 2182A)	65,536 (64k)	GPIB, RS-232, Ethernet

Recommended Accessories

2182A	Nanovoltmeter (used with 6220/6221 for low current/voltage measurement)
237-ALG-2	Low Noise Triax Cable, 3-slot triax to alligator clips
7007-1	Shielded GPIB Cable, 1m (3.2 ft)
7007-2	Shielded GPIB Cable, 2m (6.5 ft)
7007-4	Shielded IEEE-488 Cable, 4m (13.1 ft)
7009-5	Shielded RS-232 Cable, 1.5m (5 ft)
7078-TRX-3	Low Noise Triax Cable, 3-Slot Triax Connectors, 0.9m (3 ft)
7078-TRX-5	Low Noise Triax Cable, 3-Slot Triax Connectors, 1.5m (5 ft)
7078-TRX-10	Low Noise Triax Cable, 3-Slot Triax Connectors, 3m (10 ft)
7078-TRX-20	Low Noise Triax Cable, 3-Slot Triax Connectors, 6m (20 ft)

Recommended Accessories

8501-1	Trigger Link Cable with male Micro-DIN connectors at each end, 1m (3.3 ft)
4288-1	Single Fixed Rack Mounting Kit
4288-2	Dual Fixed Rack Mounting Kit
KPCI-488LPA	IEEE-488 Interface/Controller for the PCI Bus
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter

Ships with Product

- 6.6 ft (2m), Low Noise, Input Cable with Triax-to-Alligator Clips
- 6.6 ft (2m) Trigger Link Cable to connect 622x to 2182A
- Ethernet Crossover Cable (6221 only)
- Communication Cable between 2182A and 622x
- Safety Interlock Connector
- Instruction manual on CD
- Getting Started manual (hardcopy)
- Software (downloadable)




6485, 6487 Picoammeters, 6482 Picoammeter & Voltage Source


Keithley Picoammeters combine sensitive current measurement with high speed. The Model 6485 Picoammeter offers fast, sensitive current measurement. The Model 6487 offers improved measurement capability, and adds a high resolution 500V source. The Model 6482 offers two independent Picoammeter/voltage source channels.

Product Highlights

- Measure currents down to 1fA
- Voltage and resistance measurement options
- Voltage burden <200 μ V (most models)
- 5-1/2 to 6-1/2 digit resolution (most models)
- Feedback ammeter design for higher accuracy



Dark current characterization of a photodiode using Picoammeter and voltage source (such as the Model 6482).



MOSFET sub-threshold voltage test using Picoammeters and voltage sources (such as the Model 6482).

Model	Current	Resistance	Reading Rate	Input Connections
6482	1fA – 20mA (2 ch)	N/A	900 rdgs/s	3-slot triax, BNC (via included adapter)
6487	10fA – 20mA	10E+16 Ohms	1000 rdgs/s	3-slot triax
6485	10fA – 20mA	N/A	1000 rdgs/s	BNC

Recommended Accessories

4802-10	Low noise BNC Input Cable, 3m (10ft) (for 6485)
4803	Low Noise Cable Kit (for 6485)
6517-ILC-3	Interlock Cable for 8009 Resistivity Test Fixture (6487 Only)
7007-1	Shielded IEEE-488 Cable, 1m (3.3 ft)
7007-2	Shielded IEEE-488 Cable, 2m (6.6 ft)
7007-4	Shielded IEEE-488 Cable, 4m (13.1 ft)
7009-5	RS-232 Cable
7078-TRX-10	Low Noise Triax Cable, 3.0m (10 ft) (6487 Only)
7078-TRX-20	Low Noise Triax Cable, 6.0m (20 ft) (6487 Only)
7754-3	BNC to Alligator Cable (for 6485)
8501-1	Trigger Link Cable with male Micro-DIN connectors at each end, 1m (3.3 ft)

Recommended Accessories

CS-565	BNC Barrel (for 6485)
237-TRX-BAR	Triax Barrel (for 6487)
7078-TRX-BNC	Triax-to-BNC Adapter
8009	Resistivity Test Fixture (for 6487)
4288-1	Single Fixed Rack Mounting Kit
4288-2	Dual Fixed Rack Mounting Kit
KPCI-488LPA	IEEE-488 Interface/Controller for the PCI Bus
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter

Ships with Product

- 7078-TRX-BNCTriax-to-BNC Connector (2x) (Model 6482)
- CA-186-1B Ground Connection Cable, Banana to Screw-Lug (Model 6487)
- CAP-31 Protective Shield/Cap (3-lug) (Model 6487)
- CS-459 Safety Interlock Plug (Model 6487)
- 7078-TRX-3 Low Noise Triax Input Cable, 1m (3 ft) (Model 6487)
- 8607 High Voltage Banana Cable Set for Voltage Source Output (Model 6487)
- CAP-18 Protective Shield/Cap (2-lug) (Model 6485)
- 4801 Low Noise BNC Input (Model 6485)




6514 / 6517B / 6430 Electrometers

Our high resistance Electrometers provide voltage source and high resistivity measurements for sensitive measurement. They combine flexible interfacing capabilities with current sensitivity, charge measurement capabilities, resolution, and speed. The Model 6430 offers unmatched low current sensitivity.

Product Highlights

- Measure low current & high voltage, resistance, and charge
- Resistance measurements to $10\text{P}\Omega$ ohm
- Current sensitivity as low as 10aA (6430)
- Voltage burden as low as $200\mu\text{V}$
- Superior accuracy and sensitivity



This illustrates how the Model 6514's measurement can be adjusted to reflect the true dark current of the photodiode.



A Model 6517B is well suited for application where the volume resistivity needs to be measured.

Model	Current	Voltage	Resistance	Charge	Input Connections
6517B	100aA – 20mA	10 μV – 200V	100 Ω – 10P Ω	10fC – 2 μC	3-slot triax
6514	100aA – 20mA	10 μV – 200V	10m Ω – 200G Ω	10fC – 20 μC	3-slot triax
6430	10aA – 100mA	1 μV – 200V	1 $\mu\Omega$ – >20T Ω	--	3-slot triax

Recommended Accessories

237-ALG-2 Low Noise Triax Cable, 3-slot triax to alligator clips

6517B-ILC-3 Interlock Cable (For 6517B only)

7078-TRX-3 Low Noise Triax Cable, 3-Slot Triax Connectors, 0.9m (3 ft)

7007-1 Shielded IEEE-488 Cable, 1m (3.2 ft)

8501-1 Trigger Link Cable, 1m (3.3 ft)

8503 Trigger Link Cable to 2 male BNCs, 1m (3.3 ft)

8607 1kV Source Banana Cables (for 6517B only)

6517-RH Humidity Probe with Extension Cable (6517B only)

6517-TP Temperature Bead Probe (included with 6517B) (6517B only)

8009 Resistivity Test Fixture (for 6517B)

Recommended Accessories

237-BNC-TRX Male BNC to 3-Lug Female Triax Adapter (for 6517B)

237-TRX-NG Triax Male-Female Adapter with Guard Disconnected

7078-TRX-BNC 3-Slot Male Triax to BNC Adapter

7078-TRX-GND 3-Slot Male Triax to BNC Adapter with guard removed (for 6517B)

4288-1 Single Fixed Rack Mounting Kit

4288-2 Dual Fixed Rack Mounting Kit

6521 Low Current Scanner Card (for 6517B)

6522 Voltage/Low Current Scanner Card (for 6517B)

KPCI-488LPA IEEE-488 Interface/Controller for the PCI Bus

KUSB-488B IEEE-488 USB-to-GPIB Interface Adapter

Ships with Product

- Low Noise Triax Cable, 3-slot triax to alligator clips (6514, 6517B)
- 6430-322-1B Low noise Triax Cable, 3-slot triax to alligator clips (20cm)
- Dual Test Leads (6430)
- 6517-TP Thermocouple Bead Probe (6517B)
- CS-1305 Interlock Connector (6517B)
- PreAmp Cable 2m (6.6ft)



Power Supplies

Tektronix and Keithley power supplies offer a wide range of performance. Get single channel models with superior accuracy and 0.1mA current measurement resolution. New high voltage power supplies combine high voltage with sensitive, low current measurement for high voltage device testing and characterization and high voltage research. For multiple source needs, select a dual channel or triple channel supply. All channels are isolated and fully programmable. For testing battery-operated devices, consider a battery simulator.



	Tektronix PWS2000 Series (4 models)	Tektronix PWS4000 Series (5 models)	Keithley Models 2200 (5 models)	Keithley 2220/2230 Series (4 models)	Keithley Models 2290-5, 2290-10	Keithley Models 2302, 2306, 2308	Keithley Models 2303, 2304A
Description	Manual	USB Programmable Single Channel	USB and GPIB Programmable Single Channel	USB Multi-Channel; USB & GPIB Multi-Channel	High Voltage	Battery Simulator	Fast Transient Response
Channels	1	1	1	2 (2220 Series) 3 (2230 Series)	Single Output	1 (2302) 2 (2306, 2308)	Single Output
Max Voltage / Max Current	18V-72V / 1.5A-6A	20V-72V / 1.2A-5A	20V-72V / 1.2A-5A	2-30V / 1.5A (2220-30-1) 2-30V / 1.5A, 1-6V / 5A (2230-30-1)	5kV / 5mA (2290-5) 10kV / 1mA (2290-10)	15V / 5A	15V / 5A (2303) 20V / 5A (2304A)
Resolution	10mV, 10mA	1mV, 0.1mA	1mV, 0.1mA	1mV, 1mA	1V, 1μA	1mV, 100nA	1mV, 100nA
Voltage Accuracy	0.05%	0.03%	0.03%	0.03%	±0.01% (2290-5), ±6V (2290-10)	0.05%	0.05%
Current Accuracy	0.2%	0.05%	0.05%	0.1%	±0.01% (2290-5), ±5μA (2290-10)	0.2%	0.2%
Interface	Not Applicable	USB	GPIB, USB	USB USB & GPIB (-G versions)	GPIB (2290-5), GPIB, RS-232 (2290-10)	GPIB	GPIB

Choosing Your Programmable Power Supply

To help you choose the appropriate power supply for your application, the most common selection criteria are listed below.

1 Output Voltage, Current, and Power

Ensure that the power supply has sufficient voltage output and current output to meet your needs. Also ensure that the supply can deliver the required power. Some power supply V-I output characteristics offer a trade-off between maximum voltage and maximum current (hyperbolic V-I output).

2 Setting Resolution and Accuracy

Voltage and current settings (sometimes called limits or programmed values) each have resolution and accuracy specifications associated with them. The resolution of these settings determines the minimum increment in which the output may be adjusted. The accuracy describes the extent to which the value of the output matches international standards and is typically expressed as \pm (% of reading + offset).

3 Ripple and Noise

Spurious AC components on the output of a DC supply are called ripple and noise. The term “ripple” refers to periodic AC on the output. When viewed in the frequency domain, ripple shows up as spurious responses. Unlike ripple, which is periodic, noise is random. A power supply’s ripple and noise is specified within a bandwidth, and should be specified for both current and voltage.

4 Features and Programmability

When selecting your power supply, select the supply that has the functionality you need. Consider a multiple-channel supply as a cost-effective solution for applications requiring multiple power sources. For maximum accuracy, consider supplies that have remote sensing. When developing and testing battery-operated devices, consider a special purpose battery-simulating supply.



PWS2000 Series Single Channel Power Supplies

More power. More features. More value. Support many different applications with wide output voltage and current ranges, and down to 10 mV/10 mA resolution. Save time with a numeric keypad for fast and accurate voltage/current selection. Strain less with a bright, large readout digital display. All backed by Tektronix reliability.

Product Highlights

- Linear regulation
- 0.05% basic DC voltage accuracy
- 0.2% basic DC current accuracy
- Less than 3 mVp-p ripple and noise
- 20 user-defined setup memories



The numeric keypad makes it easy to specify a precise current limit before you start your test.



PWS Series power supplies are designed to be stacked with other Tektronix bench instruments to save you valuable bench space.

Models	Output Voltage	Output Current	Programmable
PWS2185	18 V	5 A	No
PWS2323	32 V	3 A	No
PWS2326	32 V	6 A	No
PWS2721	72 V	1.5 A	No

Recommended Accessories

RMU2U	Rackmount Shelf Kit for 1 or 2 Units
386-7598-xx	Rackmount Cosmetic Filler Panel

Recommended Service

R5	5-year Extended Warranty
----	--------------------------

Another Product for Consideration

The PWS4000 Series offers greater accuracy, additional features and programmability.

Ships with Product

- Calibration Certificate
- Technical Reference Manual & Documentation on CD
- Power Cord
- 3-year Warranty



PWS4000 Series USB Programmable, Single Channel Power Supplies

Precision. Now available at the touch of a button. Generate the power you need with down to 1 mV/0.1 mA resolution and a basic voltage accuracy of 0.03%. Accelerate complex tests with list mode and a USB port for remote programming. Save time with a numeric keypad for fast and accurate voltage/current selection. Performance. Accuracy. Affordability. Meet your new power supply.

Product Highlights

- Linear regulation
- 0.03% basic DC voltage accuracy; 0.05% basic DC current accuracy
- USB interface for remote programming
- Less than 5 mVp-p ripple and noise
- Remote sense, list mode and 40 user-defined setup memories



The numeric keypad makes it easy to specify a precise current limit before you start your test.



PWS Series power supplies are designed to be stacked with other Tektronix bench instruments to save you valuable bench space.

Models	Output Voltage	Output Current	Programmable
PWS4205	20 V	5 A	Yes
PWS4305	30 V	5 A	Yes
PWS4323	32 V	3 A	Yes
PWS4602	60 V	2.5 A	Yes
PWS4721	72 V	1.2 A	Yes

Recommended Accessories

RMU2U	Rackmount Shelf Kit for 1 or 2 Units
386-7598-xx	Rackmount Cosmetic Filler Panel

Recommended Service

SILV100	5-year Extended Warranty
---------	--------------------------

Another Product for Consideration

The DMM Series offers accurate voltage, current and resistance measurements for AC and DC signals.

Ships with Product

- NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- Technical Reference Manual & Documentation on CD
- Power Cord
- 3-year Warranty



2200 Programmable Single Channel DC Power Supplies with Remote Sensing

Keithley programmable single-channel DC power supplies offer an excellent combination of performance, versatility, and ease of use including 0.03% basic accuracy, 0.1mA measurement resolution, and keypad data entry. Select from a variety of DC power supplies with voltages from 20V to 72V.

Product Highlights

- Low noise, linear regulation
- 0.03% basic voltage output
- 0.05% basic current accuracy
- 1mV and 0.1mA output and measurement resolution
- Seven programmable output lists with up to 80 steps/list
- GPIB and USB interfaces



Series 2200 rear panel.



Remote sensing compensates for voltage drops in the test leads by extending the power supply feedback loop to the input of the load.

Model	Max Output Voltage	Max Output Current	Power	Ripple and Noise
2200-20-5	20V	5A	100W	<1mV _{RMS} , <3mVP-P
2200-30-5	30V	5A	150W	<1mV _{RMS} , <4mVP-P
2200-32-3	32V	3A	96W	<1mV _{RMS} , <4mVP-P
2200-60-2	60V	2.5A	150W	<1mV _{RMS} , <5mVP-P
2200-72-1	72V	1.2A	86W	<1mV _{RMS} , <3mVP-P

Recommended Accessories

CS-1638-12	Rear Panel Mating Connector, Single Channel
USB-B-1	USB Cable
4299-7	Fixed Rack Mount Kit
KPCI-488LPA	IEEE-488 Interface Board for PCI Bus
7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)

Ships with Product

- User Documentation and Driver CD
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 3-year Warranty



2220/2230 Programmable Multiple Channel DC Power Supplies with Remote Sensing

Keithley programmable multi-channel DC power supplies offer an excellent combination of performance, versatility, and ease of use including fully isolated channels, fully programmable channels, and all channel measurements displayed simultaneously. Choose either the dual channel DC power supply or the triple channel DC power supply.

Model	Max Output Voltage	Max Output Current	Power	Ripple and Noise
2220-30-1 2220G-30-1*	Ch 1: 30V, Ch 2:30V	Ch1: 1.5A, Ch 2: 1.5A	45W/channel; 90W total	<1mVRMS, <3mV P-P
2230-30-1 2230G-30-1*	Ch1: 30V, Ch 2: 30V, Ch 3: 6V	Ch1: 1.5A, Ch 2: 1.5A, Ch 3: 5A	Ch 1 and Ch 2: 45W each Ch 3: 30W, 120W total	<1mVRMS, <3mV P-P

*G versions include a GPIB interface.

Recommended Accessories


CS-1655-15	Rear Panel Mating Connector, Multi-Channel
USB-B-1	USB Cable
4299-7	Fixed Rack Mount Kit

Product Highlights

- Dual and triple channel models
- Two 30V/1.5A channels
- One 6V/5A channel (on triple channel model)
- All channels are isolated and programmable
- USB interface, USB and GPIB on G versions



Model 2230G-30-1 rear panel.



Power two isolated circuits with isolated output channels.

Ships with Product

- User Documentation and Driver CD
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 3-year Warranty



Product Highlights

- Source voltages up to 5kV and 10kV
- 1 μ A current measurement resolution
- Low noise for precision sourcing and sensitive measurements; selectable filters reduce noise to less than 3mV_{RMS} on the 5kV supply
- Safety interlock controls high voltage output
- GPIB programmable
- Protection module prevents damage to low voltage instrumentation



2290 High Voltage Power Supplies

2290 Series High Voltage Power Supplies facilitate high voltage device and material testing, as well as high energy physics experimentation. The Model 2290-5 5kV Power Supply provides voltage outputs up to 5000V, and the Model 2290-10 10kV Power Supply offers up to 10,000V. These supplies measure both output voltage with 1V resolution and output current with 1 μ A resolution.



The Model 2290-PM-200 Protection Module protects low voltage measurement equipment from voltages greater than 200V.



Reverse breakdown testing of a high voltage diode using a Keithley SourceMeter[®] SMU instrument to measure leakage currents down to pA levels. The Model 2290-PM-200 SMU Protection Module protects the SourceMeter SMU instrument from high voltage when the diode breaks down.

Model	Max Output Voltage	Max Output Current	Power	Ripple
2290-5	5kV	5mA	25W	3mV _{RMS} maximum with filter
2290-10	10kV	1mA	10W	1V _{RMS}

Recommended Accessories

For 2290-5

2290-5-SHV	5kV SHV Female-SHV Female Cable, 3m (10 ft)
2290-5-MHV	5kV SHV Female-MHV Male Cable, 3m (10 ft)
2290-5-SHVBH	5kV SHV Male Bulkhead Connector
2290-5-RMK-1	Single Fixed Rack Mount Kit for 5kV Power Supply
2290-5-RMK-2	Dual Fixed Rack Mount Kit for 5kV Power Supply

For 2290-10

2290-10-SHVUC	10kV SHV Male to Untermated Cable, 3m (10ft)
2290-10-SHV	10kV SHV Male-SHV Male Cable, 3m (10 ft)
2290-10-SHVBH	10kV SHV Female Bulkhead Connector
2290-10-RMK-1	Single Fixed Rack Mount Kit for 10kV Power Supply
2290-10-RMK-2	Dual Fixed Rack Mount Kit for 10kV Power Supply

Recommended Accessories

For both

2290-PM-200	10kV Protection Module
2290-INT-CABLE	3-Pin Connector to Untermated Interlock Cable
4299-7	Fixed Shelf Rack Mount Kit
KPCI-488LPA	IEEE-488.2 Interface Board for the PCI Bus
KUSB-488B	IEEE-488.2 USB-GPIB Interface Adapter for USB port with built-in 2m (6.6 ft) cable
7007-05	Double Shielded Premium IEEE-488 Interface Cable, 0.5m (1.6 ft)
7007-1	Double Shielded Premium IEEE-488 Interface Cable, 1m (3.2 ft)
7007-2	Double Shielded Premium IEEE-488 Interface Cable, 2m (6.5 ft)
7007-3	Double Shielded Premium IEEE-488 Interface Cable, 3m (10 ft)
7007-4	Double Shielded Premium IEEE-488 Interface Cable, 4m (13 ft)

Ships with Product

- CD with User Manual, Software Drivers, and Accessory Information
- Power Cord



2300 Portable Device Battery/Charger Simulators


Keithley's battery simulating power supplies can simulate a battery's output characteristics and its discharged state. These supplies can measure low, sleep mode load current and pulsed output load current. Dual channel models facilitate testing portable device, charge control circuitry with a battery channel and a charger simulator channel.

Product Highlights

- Optimized for battery-powered device testing
- 100nA current measurement sensitivity
- Load pulse current measurement: 33 μ s - 833 μ s
- Variable output resistance: 0 - 1 Ω with 10m Ω resolution
- Measure sleep, currents, standby currents, and full load currents to determine power consumption
- Sink current to simulate a discharged battery



Model 2306 Rear Panel.



Simplified schematic of a battery and the 2302/2306.

Model	Channels	Max Output Voltage / Current	Power	Transient Response to a 10X Load Current Change	Current Sink Capacity
2302	1	15 V / 5 A	42W	<40 μ s recovery time and <75mV voltage drop	3A
2306	2	15 V / 5 A	45W	<40 μ s recovery time and <75 mV voltage drop	3A
2308	2	15 V / 5 A	45W	<35 μ s recovery time and <90 mV voltage drop	3A

Recommended Accessories

2306-DISP	Remote Display (2302, 2306, 2308)
CS-846	Mating Output Connector
SC-182	Low Inductance Coaxial Cable
4288-1	Single Fixed Rack Mount Kit
4288-2	Dual Fixed Rack Mount Kit
KPCI-488LPA	IEEE-488 Interface Board for PCI Bus
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter

Recommended Accessories

7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)

Ships with Product

- User Documentation
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 1-year Warranty



Product Highlights

- Ultra-fast response times to load changes
- Optimized for battery-powered device testing
- 100nA current measurement sensitivity
- Load pulse current measurement: 33 μ s - 833 μ s
- Measure sleep, standby currents, and full load currents to determine power consumption
- Sink current to simulate a discharged battery



Model 2303 or 2304A rear panel.



Keithley's high speed power supplies maintain a stable voltage during large load changes.



2300 High Speed Power Supplies

The Model 2303/2304A Power Supplies provide both voltage control and power consumption monitoring for automated testing of portable, battery-operated devices. They are optimized for testing battery-operated, wireless communication devices such as cellular phones that undergo substantial load changes for very short time intervals.

Model	Channels	Max Output Voltage / Current	Power	Transient Response to a 10X Load Current Change	Current Sink Capacity
2303	Single Output	15V/3A or 9V/5A	45W	<40 μ s recovery time and <100mV voltage drop	2A
2304A	Single Output	20V/5A	100W	<40 μ s recovery time and <100mV voltage drop	3A

Recommended Accessories

2304-DISP	Remote Display (2303, 2304A)
CS-846	Mating Output Connector
SC-182	Low Inductance Coaxial Cable
4288-1	Single Fixed Rack Mount Kit
4288-2	Dual Fixed Rack Mount Kit
KPCI-488LPA	IEEE-488 Interface Board for PCI Bus
KUSB-488B	IEEE-488 USB-to-GPIB Interface Adapter

Recommended Accessories

7007-05	Double Shielded IEEE-488 Cable, 0.5m (1.6ft)
7007-1	Double Shielded IEEE-488 Cable, 1m (3.2 ft)
7007-2	Double Shielded IEEE-488 Cable, 2m (6.5 ft)
7007-3	Double Shielded IEEE-488 Cable, 3m (10 ft)
7007-4	Double Shielded IEEE-488 Cable, 4m (13 ft)

Ships with Product

- User Documentation
- Rear Panel Mating Connector
- Calibration Certificate
- Power Cord
- 1-year Warranty



Frequency Counter/Timers

Featuring the precision and intuitive operation you've come to expect from our oscilloscopes, Tektronix counter/timers are built with performance and convenience in mind. Featuring industry-leading resolution, built-in measurement and analysis modes.



	FCA3000	FCA3100	MCA3000
Frequency Range	400 MHz, 3 GHz, 20 GHz	400 MHz, 3 GHz, 20 GHz	27 GHz, 40 GHz
Resolution	<ul style="list-style-type: none"> 100 ps (time) 12 digits/s (freq) 	<ul style="list-style-type: none"> 50 ps (time) 12 digits/s (freq) 	<ul style="list-style-type: none"> 100 ps (time) 12 digits/s (freq)
Data Transfer	<ul style="list-style-type: none"> 250 k Samples/sec (internal) 5 k Samples/sec (block) 	<ul style="list-style-type: none"> 250 k Samples/sec (internal) 15 k Samples/sec (block) 	<ul style="list-style-type: none"> 250 k Samples/sec (internal) 5 k Samples/sec (block)
Measurements	13 Automated Measurements Frequency, Period, Ratio, Time Interval, Time Interval Error, Pulse Width, Rise/Fall Time, Phase Angle, Duty Cycle, Vmax, Vmin, Vp-p	14 Automated Measurements Frequency, Period, Ratio, Time Interval, Time Interval Error, Pulse Width, Rise/Fall Time, Phase Angle, Duty Cycle, Vmax, Vmin, Vp-p, Totalize	13 Automated Measurements Frequency, Period, Ratio, Time Interval, Time Interval Error, Pulse Width, Rise/Fall Time, Phase Angle, Duty Cycle, Vmax, Vmin, Vp-p + An Integrated Power Meter
Analysis Modes	TrendPlot™, Measurement Statistics, Allan Deviation, Histogram	TrendPlot™, Measurement Statistics, Allan Deviation, Histogram	TrendPlot™, Measurement Statistics, Allan Deviation, Histogram
Connectivity	Rear panel: USB device port, GPIB PC communications software: NI LabVIEW SignalExpress™ Tektronix Edition (LE Version)	Rear panel: USB device port, GPIB PC communications software: NI LabVIEW SignalExpress™ Tektronix Edition (LE Version)	Rear panel: USB device port, GPIB PC communications software: NI LabVIEW SignalExpress™ Tektronix Edition (LE Version)

Choosing Your Counter/Timers

To help you choose the right counter/timer for your needs, the most common selection criteria are listed below, along with helpful tips for determining your requirements.

1 Frequency Resolution

The frequency resolution is the smallest change the counter/timer can detect in closely spaced frequencies. The resolution is influenced by the time setting on the instrument, i.e., longer time settings (averaged) will display more digits. In general this feature is expressed as the number of digits per second shown on the instrument's display (e.g. 12 digits/s). More digits indicate a higher frequency resolution.

2 Time Resolution

For timing measurements this feature represents the smallest "time" change that the instrument can detect. Time resolution is sometimes described as "single shot" resolution and is generally measured in pico seconds, e.g. 50 ps. The lower the number the better the time resolution feature.

3 Time Base Stability

The internal time base establishes the reference against which input signals are measured. The better the time base, the more accurate your measurements can be. Most counters employ a quartz crystal as the internal time base element which comes in 3 basic types; Room Temperature (RTXO), Temperature Compensated (TCXO) and Oven Control (OCXO). TCXO and OCXO devices are more stable and when used as the internal time base the instrument will consistently yield accurate and reliable results.

4 Analysis Capability

When choosing your counter/timer, you should review available analysis modes, such as trend plotting, measurement statistics, histograms and modulation domain analysis to ensure your needs are met.



FCA3000/3100 Series

Looking to capture small frequency and time changes? Look no further than this Timer/Counter/Analyzer. Capture small changes in your signal with industry-leading frequency and time resolution. Quickly and accurately analyze signals with 13 automated measurements and comprehensive built-in analysis modes, including measurement statistics, histograms and trending. Get unparalleled ease-of-use with intuitive operation and USB connectivity. It's everything you need in a Timer/Counter/Analyzer. And more.

Product Highlights

- 12 digit/sec frequency resolution
- 50 ps (FCA3100) or 100 ps (FCA3000) single-shot time resolution
- 0.001° phase resolution
- 250 k readings/sec data transfer rate to internal memory
- 13 automated frequency, time, phase and voltage measurements



See how your device is changing over time with built-in analysis modes – TrendPlot™, histograms and statistics.



Easily connect to a PC with the USB and GPIB ports.

Models	Max. Frequency	Channels	Time Resolution	Frequency Resolution
FCA3000	400 MHz	2	100 ps	12 digit/s
FCA3003	3 GHz	2 – 400 MHz 1 – 3 GHz	100 ps	12 digit/s
FCA3020	20 GHz	2 – 400 MHz 1 – 20 GHz	100 ps	12 digit/s
FCA3100	400 MHz	2	50 ps	12 digit/s
FCA3103	3 GHz	2 – 400 MHz 1 – 3 GHz	50 ps	12 digit/s
FCA3120	20 GHz	2 – 400 MHz 1 – 20 GHz	50 ps	12 digit/s

Recommended Accessories

174-4401-xx	USB Host to Device Cable, 3 Feet
012-0991-xx	GPIB Cable, Double Shielded
012-1256-xx	BNC Male to BNC Male, 9 Feet
ACD4000	Soft Carrying Case
HCTEK-4321	Hard Carrying Case
RMU2U	Rackmount Shelf Kit for 2 Units
TVA3000	TimeView™ Modulation Domain Analysis Software
SIGEXPTE	NI LabVIEW SignalExpress™ Tektronix Edition Software – Full Version

Instrument Options

MS	Medium Stability OCXO Timebase, 2 X 10 ⁻⁷
HS	High Stability OCXO Timebase, 5 X 10 ⁻⁸
RP	Rear-panel Connectors

Recommended Service

SILV200	5-year Extended Warranty (FCA3000, FCA3003, FCA3100, FCA3103)
SILV400	5-year Extended Warranty (FCA3020, FCA3120)

Ships with Product

- Trial Version of TimeView™ Software and NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- User Manual on CD
- Programmers Guide & Technical Specifications
- Power Cord
- 3-year Warranty




MCA3000 Series

Feature-rich. Fully loaded. No matter how you say it, this microwave timer/counter is packed with functionality. Measure up to 40 GHz signals. And, get two extra 300 MHz timer/counter ports for added versatility. Quickly and accurately analyze signals with 13 automated measurements and comprehensive analysis modes, including statistics, histograms and trending. Get unparalleled ease-of-use with intuitive operation and USB connectivity. Finally, fully-loaded comes standard.

Product Highlights

- 12 digit/sec frequency resolution
- 100 ps single-shot time resolution
- 250 k readings/sec data transfer rate to internal memory
- 13 automated frequency, time, phase and voltage measurements
- Integrated power meter



See how your device is changing over time with built-in analysis modes – TrendPlot™, histograms and statistics.



Easily connect to a PC with the USB and GPIB ports.

Models	Max. Frequency	Channels	Time Resolution	Frequency Resolution
MCA3027	27 GHz	2 – 300 MHz 1 – 27 GHz	100 ps	12 digit/s
MCA3040	40 GHz	2 – 300 MHz 1 – 40 GHz	100 ps	12 digit/s

Recommended Accessories

174-4401-xx	USB Host to Device Cable, 3 Feet
012-0991-xx	GPIB Cable, Double Shielded
012-1256-xx	BNC Male to BNC Male, 9 Feet
AC4000	Soft Carrying Case
HCTEK-4321	Hard Carrying Case
RMU2U	Rackmount Shelf Kit for 2 Units
TVA3000	TimeView™ Modulation Domain Analysis Software
SIGEXPT	NI LabVIEW SignalExpress™ Tektronix Edition Software – Full Version

Instrument Options

HS	High Stability OCXO Timebase, 5 X 10 ⁻⁸
US	Ultra High Stability OCXO Timebase, 1.5 X 10 ⁻⁸

Recommended Service

SILV600	5-year Extended Warranty
---------	--------------------------

Ships with Product

- Trial Version of TimeView™ Software and NI LabVIEW SignalExpress™ TE (LE version) Software
- Calibration Certificate
- User Manual on CD
- Programmers Guide & Technical Specifications
- Power Cord
- 3-year Warranty



RF Power Meters

Tektronix PSM Power Meter Series delivers the precision accuracy you need and the features you want, including exceptional temperature stability and throughput. Plus, with 13 models to choose from, it also delivers exceptional versatility.



	PSM3000	PSM4000	PSM5000
Description	Power Meter Average Power	Power Meter Average / Peak / Pulse	Power Meter Average / Peak / Pulse + Profiling
Frequency Range	10 MHz - 8 / 18 / 26.5 GHz	10 MHz - 8 / 18.6 / 20 GHz	50 MHz - 8 / 18.6 / 20 GHz
Dynamic Range	-55 to +20 dBm	-60 to +20 dBm	-60 to +20 dBm
Data Transfer Rate	2000 Reads/sec	2000 Reads/sec	2000 Reads/sec
Measurements	True Average Power; Duty Cycle Corrected Pulse Power; Measurement Logging	Average Power (CW); Duty Cycle Corrected Pulse Power; Peak Power; Duty Cycle; Peak and Average Burst Power; Measurement Logging	Average Power (CW); Duty Cycle Corrected Pulse Power; Peak Power; Pulse Power; Duty Cycle; Peak and Average Burst Power; Measurement Logging; Pulse Width, Rise/Fall, Overshoot, Droop, Time Gated Measurements, Pulse Waveform Display with Markers

Choosing Your RF Power Meter

Power measurements are fundamental to the development cycle of any RF or microwave product, from radios to radars. To help you choose the right Power Sensor/Meter combination, the most common selection criteria are listed below, along with helpful tips for determining your requirements.

1 Measurement Integrity

Measurement integrity is a combination of the cumulative measurement uncertainty and instrument stability. While the measurement uncertainty is usually specified, the instrument stability includes several factors. By providing calibration over the entire temperature operating ranges and not requiring zeroing prior to measurement, the improved stability of the power sensor/meter reduces possible human errors and assures the integrity of measured results.

2 Performance and Functionality

Basic power measurements of continuous wave (CW) signals are fundamental to power sensor/meters. However, today's modern signals include modulation, pulses, or other time-varying attributes. Being able to correct for duty cycle, measure peak power, signal statistics, and triggering inputs and outputs increase the utility of the power sensor/meter combination.

3 Speed and Connectivity

Power measurements tend to dominate the test process of wireless device test. The speed of measurement should remain constant over the entire dynamic range of the sensor. USB connectivity and power enable high speed measurement throughput and help reduce system rack space.

4 Analysis

When integrating power measurements into a full system measurement process, you should review the available analysis software and hardware capabilities to determine if equipment redundancies can be eliminated. Advanced measurement analysis, like trend graphing, statistical measurements, measurement logging, and pulse profiling can replace more complex and expensive equipment needs and simplify device test.



Product Highlights

- 8 GHz, 18 GHz, 20 GHz, and 26.5 GHz Models
- Models Available with N and 3.5 mm Connectors
- Dynamic Range as Low as -60 dBm and as High as +20 dBm
- Uncertainty as Low as 2.6%
- Reading Rates up to 2000 Readings/sr



Control the power meter and perform measurements using intuitive Windows® based software.

PSM3000, 4000 and 5000 Series

The PSM3000, PSM4000, and PSM5000 Series are compact power sensors/meters that deliver fast, accurate RF and microwave power measurements. A broad range of CW and pulse modulation measurements are available, depending on the series you choose.



In addition to the USB power & Connectivity port the meters include TTL trigger inputs and outputs for synchronization.

Models	Description	Frequency Range	Dynamic Range	Connector Style
PSM3110	True RMS Average	10 MHz - 8 GHz	-55 to +20 dBm	3.5mm male
PSM3120	True RMS Average	10 MHz - 8 GHz	-55 to +20 dBm	N-Male
PSM3310	True RMS Average	10 MHz - 18 GHz	-55 to +20 dBm	3.5mm male
PSM3320	True RMS Average	10 MHz - 18 GHz	-55 to +20 dBm	N-Male
PSM3510	True RMS Average	10 MHz - 26.5 GHz	-55 to +20 dBm	3.5mm male
PSM4110	Power Meter (Avg / Peak / Pulse)	10 MHz - 8 GHz	-60 to +20 dBm	3.5mm male
PSM4120	Power Meter (Avg / Peak / Pulse)	10 MHz - 8 GHz	-60 to +20 dBm	N-Male
PSM4320	Power Meter (Avg / Peak / Pulse)	50 MHz - 18.6 GHz	-40 to +20 dBm	N-Male
PSM4410	Power Meter (Avg / Peak / Pulse)	50 MHz - 20 GHz	-40 to +20 dBm	3.5mm male
PSM5110	Power Meter (Avg / Peak / Pulse + Profiling)	100 MHz - 8 GHz	-60 to +20 dBm	3.5mm male
PSM5120	Power Meter (Avg / Peak / Pulse + Profiling)	100 MHz - 8 GHz	-60 to +20 dBm	N-Male
PSM5320	Power Meter (Avg / Peak / Pulse + Profiling)	50 MHz - 18.6 GHz	-40 to +20 dBm	N-Male
PSM5410	Power Meter (Avg / Peak / Pulse + Profiling)	50 MHz - 20 GHz	-40 to +20 dBm	3.5mm male

Recommended Accessories

174-6150-xx	USB Cable, 2 m, 20 AWG
174-6164-xx	SMB Female to BNC Male, 1 m Trigger Cable
348-2013-xx	Replacement Rubber Boot

Recommended Service

SILV200	5-year Extended Warranty (PSM3110, PSM3120)
SILV400	5-year Extended Warranty (PSM3310, PSM3320)
SILV600	5-year Extended Warranty (PSM3510)

Ships with Product

- 2-meter USB Cable
- Calibration Certificate, USB flash drive with User and Safety Manual, Technical Reference Manual and the Programmer Manual
- 3-year Warranty



The Tektronix Service Advantage

Tektronix offers unequalled expertise, global reach and a customer-centric approach with every service option. From our full suite of Factory-Certified service plans for Tektronix equipment to our Multi-Vendor Service (MVS) calibration, we can ensure optimal performance for your entire inventory of test and measurement instruments.

Tektronix Service Highlights

▪ Tektronix Factory Experts

Access to the engineering expertise that designed and built your products to ensure they are in peak performance. Our support engineers hold an average of 20 years of training and experience.

▪ Comprehensive and Thorough Treatment

Software updates, safety and reliability modifications, and cosmetic enhancements are included if applicable. Products are returned to you in “like-new” condition. The Tektronix network of service centers offers worldwide support.

▪ Efficiency and Convenience

Our team of professionals focus on getting your instruments back to you as soon as possible, minimizing your downtime and increasing your operating efficiency.

▪ Flexible Repair and Calibration Service

Tektronix offers you the choice of a cost effective, flexible service package to meet your specific business needs.

Tektronix Factory-Certified Service Plans

Silver Care	Silver Care Packages	Gold Care
<ul style="list-style-type: none"> ▪ Choose between a 3 or 5 year extended warranty plan ▪ No purchase orders, quotes, or approval delays – one phone call away starts the repair process ▪ Covers equipment, parts, labor and transportation ▪ Includes applicable software, safety and reliability updates ▪ Faster repair time than without coverage (average is 5 days faster) 	<ul style="list-style-type: none"> ▪ All the benefits of our popular Silver Care Plan in a convenient take-home package. ▪ Each package includes a unique activation code to effortlessly initiate and manage your service coverage online. ▪ May be purchased any time during the original warranty period 	<ul style="list-style-type: none"> ▪ Choose between a 3 or 5 year extended warranty plan ▪ Loaner product of equal or higher performance shipped within 24 hours ▪ Priority access to Global Tektronix Customer Call Center for technical support ▪ 30% discount on scheduled Factory-certified calibration ▪ Coverage of user-caused EOS and ESD damage ▪ Typical downtime of 48 hours or less
Platinum Care	Calibration	
<ul style="list-style-type: none"> ▪ Custom-tailored plan with a typical downtime of less than 1 hour. ▪ Identically configured spare products dedicated to your facility ▪ On-site calibration event and repair coverage ▪ Priority access to technical support, and flexible contract duration and payment terms, 	<ul style="list-style-type: none"> ▪ Choose from multi-year contracts and single event calibrations ▪ Accredited and traceable calibration ▪ Adjustments included to restore performance ▪ Applicable software, safety, and reliability updates ▪ Calibration records retention 	



Multi-Vendor Service

Comprehensive Calibration and Repair for All Your Test, Measurement and Control Equipment

- Service for more than 140,000 instruments from over 9,000 manufacturers
- Broadest scope of accreditation
- 100+ global points of service
- 1 million calibrations annually

Performance

Calibration is the cornerstone of measurement confidence. Now Tektronix can manage 100% of your calibration requirements, irrespective of product brand or origin. Our multi-vendor service tools simplify your calibration management program, minimizing downtime and improving operational efficiency.

Optimize Asset Availability & Utilization

Tektronix provides industry-leading calibration and repair turnaround time on more than 140,000 products from over 9,000 manufacturers. The CalWeb® Asset Management System allows you to actively manage any downtime required for regular equipment maintenance and provides you with online, enterprise-wide instrument visibility.

Global Reach with Local Presence

Tektronix has the most extensive global network of resources. With more than 100 points of service and 1,100 highly trained experts, our unmatched suite of capabilities and services are available locally to most of the world's research and manufacturing centers.

Quality & Accuracy

Our comprehensive quality system is unmatched. Choose from multiple NIST traceable certificate options, including ANSI Z540.1, ISO/IEC 17025 and ISO 9001:2008. Our customers have direct access to the quality they expect from Tektronix' 65 years as an industry leader in test, measurement and monitoring solutions.

Industry Leader

Tektronix is the industry leading provider of calibration services for the life science, aerospace, and defense industries. With consistent high quality and comprehensive service, customers have turned to Tektronix, making us their first choice for outsourced calibration needs.

For more information on Tektronix multi-vendor service, visit **service-solutions.tektronix.com**

Or call us at 1-800-438-8165









Contact Tektronix:

ASEAN / Australia (65) 6356 3900
Austria* 00800 2255 4835
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium* 00800 2255 4835
Brazil +55 (11) 3759 7627
Canada 1 (800) 833-9200
Central East Europe and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France* 00800 2255 4835
Germany* 00800 2255 4835
Hong Kong 400-820-5835
Ireland* 00800 2255 4835
India +91-80-30792600
Italy* 00800 2255 4835
Japan 0120-441-046
Luxembourg +41 52 675 3777
Macau 400-820-5835
Mongolia 400-820-5835
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Middle East, Asia and North Africa +41 52 675 3777
The Netherlands* 00800 2255 4835
Norway 800 16098
People's Republic of China 400-820-5835
Poland +41 52 675 3777
Portugal 80 08 12370
Puerto Rico 1 (800) 833-9200
Republic of Korea +822-6917-5000
Russia +7 495 664 75 64
Singapore +65 6356-3900
South Africa +27 11 206 8360
Spain* 00800 2255 4835
Sweden* 00800 2255 4835
Switzerland* 00800 2255 4835
Taiwan 886-2-2656-6688
United Kingdom* 00800 2255 4835
USA 1 (800) 833-9200

* If the European phone number above is not accessible,
please call +41 52 675 3777

Contact List Updated June 2013

For Further Information

Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © 2014, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

03/14 EA/FCA

48A-25025-13 WW

Tektronix®

