


BACKYARD
Creations[®] 11ft Round Offset
Umbrella with
Resin Base
Assembly and User Manual
ITEM: UMB-940120

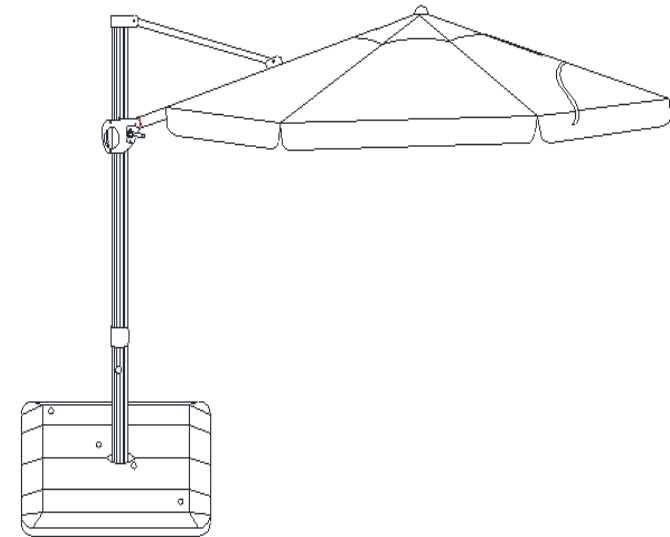


The schematics in this manual are for assembly and operation illustration only. They may differ from the umbrella's actual appearance.

BACKYARD
Creations[®]

For additional product information, please contact our
Customer Service Center at 1-855-880-7205
between 8am and 5pm Eastern Time,
Monday through Friday.

©2014 Distributed by Menard, Inc., Eau Claire, WI 54703
MADE IN CHINA

If you have any questions, concerns or need additional parts
please **do not return** to the place of purchase. Contact our
customer service department toll free at **1-855-880-7205**
for further instructions.

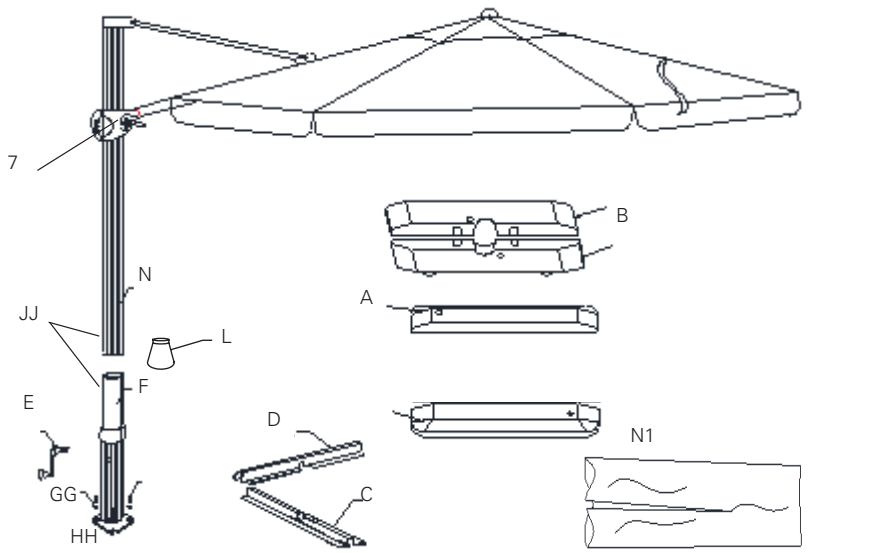


PART	DESCRIPTION	QTY(PC)
A	Blow Molder Base Outside (with cap)	2
B	Blow Molded Base Inside (with cap)	2
C	Lower Cross Leg	1
D	Upper Cross Leg	1
F	Holder Pole (with crank)	1
CAN	Canopy (on the umbrella frame)	1
N	Umbrella Frame (with canopy)	1
N1	Cover	1

WARNINGS

- 1. Do not use this umbrella during periods of high wind and rain.**
Failure to do so may result in personal injury and/or property damage.
2. Be sure to secure and/or weight the base of the umbrella.
3. Always take the umbrella down when not in use.
4. Placement of the umbrella over or near a swimming pool can cause premature fading of the canopy. This is not covered under our warranty.
5. To prevent damage to the canopy, open the umbrella facing the opposite direction that the wind is blowing.

No.	Description	Qty.	Re-order No.
A	Blow Molded Base Outside	2	BSE-ABMP-BWN
B	Blow Molded Base Inside	2	BSE-BBMP-BWN
C	Lower Cross Leg	1	CSL-C78RX-BWN
D	Upper Cross Leg	1	CSL-D78RX-BWN
E	360° Holder Pole Crank	1	CRK-E78RHP-BWN
F	Holder Pole	1	HDP-F78RX-BWN
GG	Bolts	4	HDW-GG
HH	Washers	4	HDW-HH
JJ	Hex Bolts	2	HDW-JJ
CAN	Canopy	1	CAN-11O8RBP-SES
N1	Cover	1	CVR-1108RBP-SES
7	Crank	1	CRK-778RG-BWN
L	Pole Support Cup	1	PSC-L78R-BWN

This ATLeisure product is covered by U.S. Patent No. 5,937,882 and U.S. Patent No. 8,104,492.

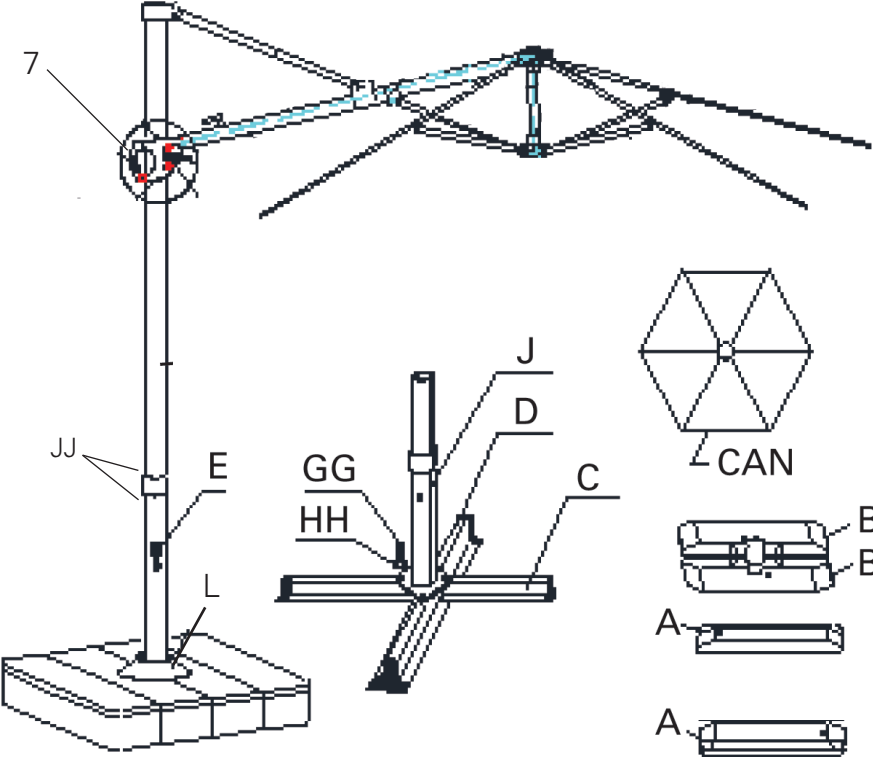

PART	PICTURE	DESCRIPTION	QUANTITY
GG		Hex Bolt M10-1.5x20 A2-70	4pcs (in the blister pack)
HH		Flat Washer M10 A2-70	4pcs (in the blister pack)
JJ		Hex Bolt M8 A2-70	2pcs (in the blister pack)

PREPARATION
Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble the product or return to the place of purchase. Contact our customer service toll free at **1-855-880-7205** for replacement parts or further instructions.

Tools Required for Assembly: Open end wrench or adjustable wrench.
Phillips screwdriver (Not included)

Remove all protective materials. Be careful not to throw away small parts such as bolts, washers, etc. that may be wrapped in the protective materials.

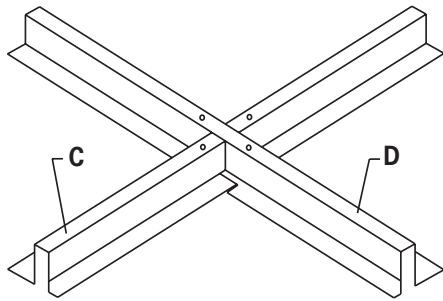


Fig. 1

Step 1. Place Lower Cross Leg (C) on the ground, line up notches and place Upper Cross Leg (D) over the Lower Cross Leg (C) as shown in Fig.1.




Fig. 2

Step 2. Attach the Holder Pole (F) to the base by using the Bolts (GG) and Washers (HH) (found in blister pack) as shown in Fig. 2. Hand tighten only. Adjust the Holder Pole (F) to be sure it is positioned correctly on the base. Finally tighten all bolts. Be careful not to over tighten.




Fig. 3

Step 3. After filling up each Blow Molded Base (A & B) with sand and water, cover with cap (M). Place Pole Support Cup (L) onto Holder Pole (F) and lay on top of Blow Molded Base (B).

90-DAY WARRANTY

This product is covered under a manufacturer's 90-day warranty from date of purchase against defects in materials and workmanship. This warranty does not cover damage due to neglect, abuse or weather related damage.

HOW TO FILE A CLAIM

If you are within your warranty, to file a claim you must have your receipt and pictures of your damaged umbrella.

CANOPY CARE INSTRUCTIONS:


Simply clean the umbrella canopy with a soft brush and mild detergent!

Do not machine wash.

Do not iron.

Air dry the canopy thoroughly before storing for extended periods of time.

Make sure the canopy is completely open during drying process to prevent shrinkage.

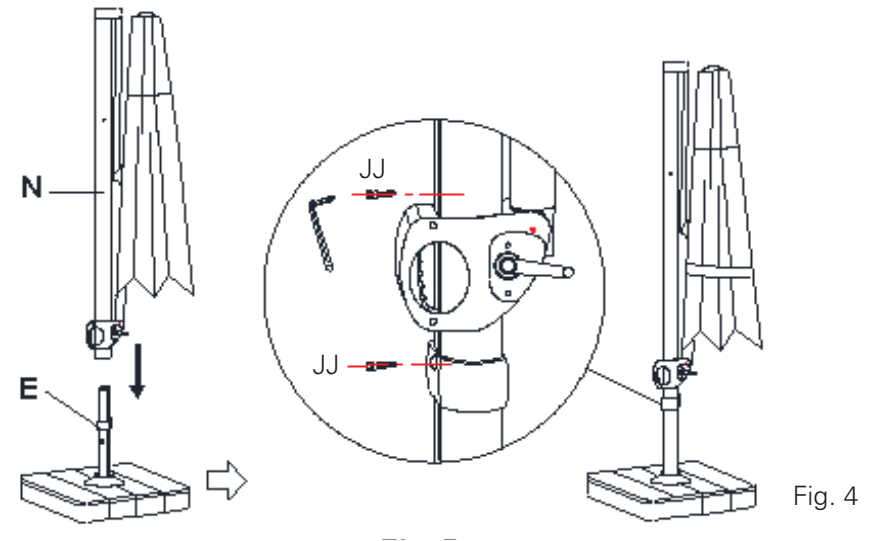

Step 4. Insert Umbrella Frame with Canopy (N) into the Holder Pole (F). Slide the holder pole collar onto the holder pole at the same time shown in Fig. 4. Tighten the two Hex Bolts (JJ) into the holder pole to secure the umbrella as shown in Fig. 4.

6. Instructions Of Set-Up & Operation |

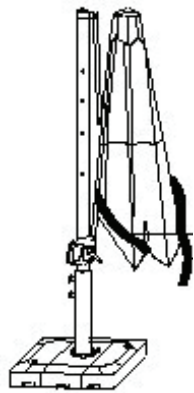


Fig. 5

Step 1. Unfasten the storage straps around the canopy as shown in Fig. 5.

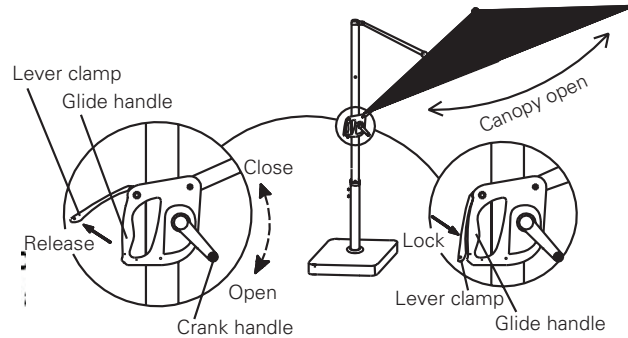


Fig. 6

Step 2. To open the umbrella, turn the crank handle in the open direction, pull up the Lever clamp, slide the glide handle up along the pole. Push down the Lever clamp when the desired tilting angle has been achieved. (The higher the glide handle, the less the tilting angle. See Fig. 6 for the definition of the Tilting angle). To fully open the canopy, continue to turn the crank handle in the open direction until the lower center hub reaches the end of the support pole and the canopy has the proper tension.

If the crank becomes too hard to crank, check to see if the rope has come off the pulley. If you continue to turn the crank, the rope could break.

Contact our customer service toll free at **1-855-880-7205** for further assistance.

| Instructions Of Set-Up & Operation (cont'd) 7.

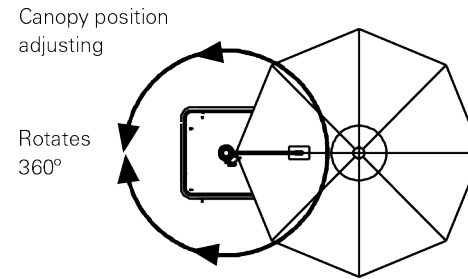


Fig. 7

Step 3. The umbrella has a unique design that moves the pole out of your way and off to the side. The multiple position canopy can rotate 360° around the axis of the main pole to offer the shade on your expected area around the umbrella as shown in Fig. 7.