



Laser Distancer LD 320

en Operating instructions

STABILA®



...sets standards


Table of Contents


Instrument Set-up	2	Prohibited use	-11
Introduction	2	Hazards in use	-11
Overview	2	Limits of use	-11
Display	3	Disposal	-11
Insert batteries	3	Electromagnetic Compatibility (EMC)	-11
Operations	4	FCC statement (applicable in U.S.)	-12
Switching ON/OFF	4	Laser classification	-12
Clear	4	Labelling	-12
Message Codes	4		
Adjusting measuring reference	4		
Distance unit setting	4		
Beep ON/OFF	4		
Measuring Functions	5		
Measuring single distance	5		
Permanent measuring	5		
Area	6		
Volume	6		
Pythagoras (2-point)	7		
Pythagoras (3-point)	7		
Minimum Tracking	8		
Maximum Tracking	8		
Technical Data	9		
Message Codes	10		
Care	10		
Warranty	10		
Safety Instructions	10		
Areas of responsibility	10		
Permitted use	11		

Stabila LD 320

EN Instrument Set-up

Introduction

 The safety instructions and the user manual should be read through carefully before the product is used for the first time.

 The person responsible for the product must ensure that all users understand these directions and adhere to them.


The symbols used have the following meanings:

WARNING


Indicates a potentially hazardous situation or an unintended use which, if not avoided, will result in death or serious injury.

CAUTION

Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in minor injury and/or appreciable material, financial and environmental damage.

 Important paragraphs which must be adhered to in practice as they enable the product to be used in a technically correct and efficient manner.


Overview

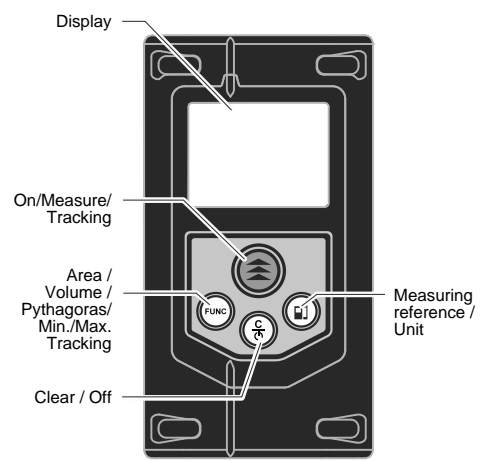


Stabila LD 320

Instrument Set-up

Display

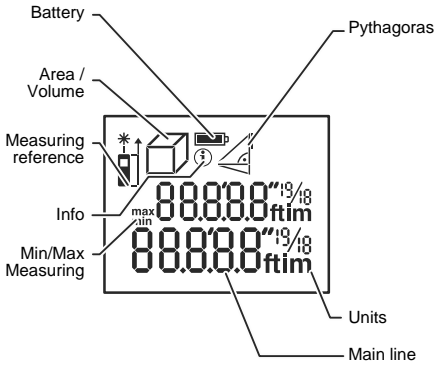

Insert batteries

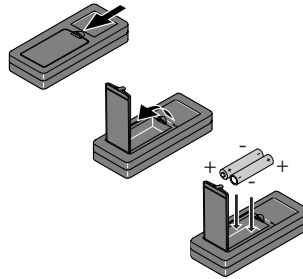


i To ensure a reliable use, do not use zinc-carbon batteries. Change batteries when battery symbol is flashing.


Stabila LD 320

Operations


Switching ON/OFF




Clear




Message Codes




Adjusting measuring reference

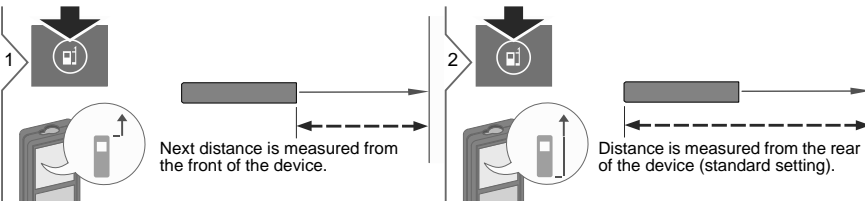

Distance unit setting




Beep ON/OFF

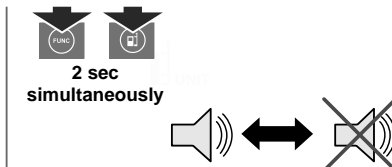

Stabila LD 320


Measuring Functions

Measuring single distance

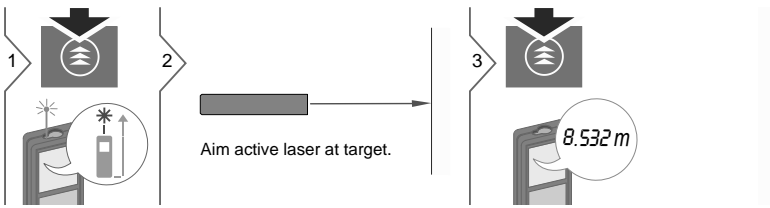

i Target surfaces: Measuring errors can occur when measuring to colourless liquids, glass, styrofoam or semi-permeable surfaces or when aiming at high gloss surfaces. Against dark surfaces the measuring time increases.

Permanent measuring

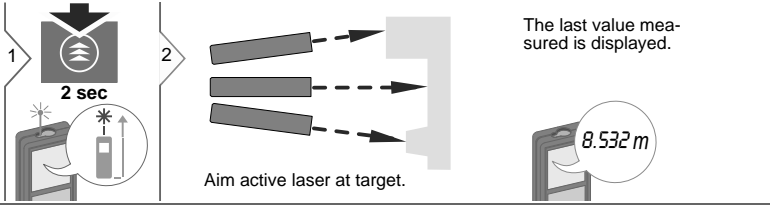


3 Stops permanent measuring.

Stabila LD 320



EN Measuring Functions

Area

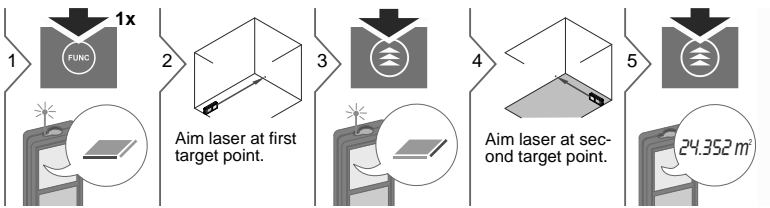

i The result is shown in the main line and the measured value above.

Volume

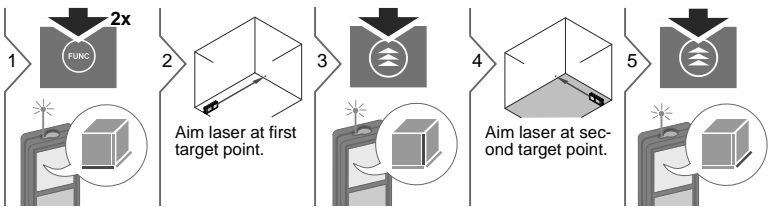

i The result is shown in the main line and the measured value above.

Stabila LD 320

Measuring Functions

Pythagoras (2-point)

1 Press **FUNC** 3x

2 Aim laser at upper point.

3 Press **FUNC**

4 Aim laser at lower point.

5 Press **FUNC**

8.294 m

i The result is shown in the main line and the measured distance above. Pressing the measuring key for 2 sec in the function activates automatically Minimum or Maximum measurement.

Pythagoras (3-point)

1 Press **FUNC** 4x

2 Aim laser at upper point.

3 Press **FUNC**

4 Aim laser at rectangular point.

5 Press **FUNC**

6 Aim laser at lower point.

7 Press **FUNC**

8.294 m

i The result is shown in the main line and the measured distance above. Pressing the measuring key for 2 sec in the function activates automatically Minimum or Maximum measurement.

Stabila LD 320

EN Measuring Functions

Minimum Tracking

1 Press **FUNC** 5x

2 Aim laser

3 Press **FUNC**

min 2.332 m 2.847 m

Min. Distance

Current measured value

min 2.332 m

Min. Distance

i Min/max measurement is also available for Pythagoras calculations.

Maximum Tracking

1 Press **FUNC** 6x

2 Aim laser

3 Press **FUNC**

max 4.684 m 4.242 m

Max. Distance

Current measured value

max 4.684 m

Max. Distance

i Min/max measurement is also available for Pythagoras calculations.

Technical Data

Distance measurement	
Typical Measuring Tolerance*	± 2.0 mm / 0.08 in ***
Maximum Measuring Tolerance**	± 3.0 mm / 0.12 in ***
Range at Target Plate	50 m / 164 ft
Typical Range*	40 m / 132 ft
Range at unfavourable condition****	35 m / 115 ft
Smallest unit displayed	1 mm / 1/16 in
Ø laser point at distances	6 / 30 mm (10 / 50 m)
General	
Laser class	2
Laser type	635 nm, < 1 mW
Autom. laser switch off	after 90 s
Autom. power switch-off	after 180 s
Battery durability (2 x AAA)	up to 3000 measurements
Dimension (H x D x W)	100 x 54 x 30 mm 3.94 x 2.13 x 1.18 in
Weight (with batteries)	100 g / 3.21 oz
Temperature range:	
- Storage	-25 to 70 °C -13 to 158 °F
- Operation	0 to 40 °C 32 to 104 °F



* applies for 100 % target reflectivity (white painted wall), low background illumination, 25 °C

** applies for 10 to 500 % target reflectivity, high background illumination, 0 °C to + 40 °C

*** Tolerances apply from 0.05 m to 10 m with a confidence level of 95%. The maximum tolerance may deteriorate to 0.15 mm/m from 10 m to 30 m and to 0.2 mm/m for distances above 30 m

**** applies for 100 % target reflectivity, background illumination of approximately 30'000 lux

Functions	
Distance measuring	yes
Min/Max measuring	yes
Permanent measuring	yes
Area	yes
Volume	yes
Pythagoras	2-point, 3-point
Display illumination	yes

Stabila LD 320

9

Message Codes

If the message **Error** does not disappear after switching on the device repeatedly, contact the dealer.

If the message **InFo** appears with a number, press the Clear button and observe the following instructions:

No.	Cause	Correction
204	Calculation error	Perform measurement again.
252	Temperature too high	Let device cool down.
253	Temperature too low	Warm device up.
255	Received signal too weak, measuring time too long	Change target surface (e.g. white paper).
256	Received signal too high	Change target surface (e.g. white paper).
257	Too much background light	Shadow target area.
258	Measurement outside of measuring range	Correct range.
260	Laser beam interrupted	Repeat measurement.

Care

- Clean the device with a damp, soft cloth.
- Never immerse the device in water.
- Never use aggressive cleaning agents or solvents.

Warranty

Stabila provides a two-year warranty for the Stabila LD 320.

Further information can be found on the Internet at: www.stabila.de

Safety Instructions

The person responsible for the instrument must ensure that all users understand these directions and adhere to them.

Areas of responsibility

Responsibilities of the manufacturer of the original equipment:

STABILA Messgeräte
Gustav Ullrich GmbH
P.O. Box 13 40 / D-76851 Annweiler
Landauer Str. 45 / D-76855 Annweiler

USA/Canada:

STABILA Inc.
332 Industrial Drive
South Elgin, IL 60177
1.800.869.7460

The company above is responsible for supplying the product, including the User Manual in a completely safe condition. The company above is not responsible for third party accessories.

Responsibilities of the person in charge of the instrument:

- To understand the safety instructions on the product and the instructions in the User Manual.
- To be familiar with local safety regulations relating to accident prevention.
- Always prevent access to the product by unauthorised personnel.

Permitted use

- Measuring distances
- Tilt measurement

Prohibited use

- Using the product without instruction
- Using outside the stated limits
- Deactivation of safety systems and removal of explanatory and hazard labels
- Opening of the equipment by using tools (screwdrivers, etc.)
- Carrying out modification or conversion of the product
- Use of accessories from other manufacturers without express approval
- Deliberate dazzling of third parties; also in the dark
- Inadequate safeguards at the surveying site (e.g. when measuring on roads, construction sites, etc.)
- Deliberate or irresponsible behaviour on scaffolding, when using ladders, when measuring near machines which are running or near parts of machines or installations which are unprotected
- Aiming directly in the sun

Hazards in use

⚠ WARNING

Watch out for erroneous measurements if the instrument is defective or if it has been dropped or has been misused or modified. Carry out periodic test measurements. Particularly after the instrument has been subject to abnormal use, and before, during and after important measurements.

⚠ CAUTION

Never attempt to repair the product yourself. In case of damage, contact a local dealer.

⚠ WARNING

Changes or modifications not expressly approved could void the user's authority to operate the equipment.

Limits of use

i Refer to section "Technical data". The device is designed for use in areas permanently habitable by humans. Do not use the product in explosion hazardous areas or in aggressive environments.

Disposal

⚠ CAUTION

Flat batteries must not be disposed of with household waste. Care for the environment and take them to the collection points provided in accordance with national or local regulations. The product must not be disposed with household waste.

Dispose of the product appropriately in accordance with the national regulations in force in your country. Adhere to the national and country specific regulations. Product specific treatment and waste management can be downloaded from our homepage.



Electromagnetic Compatibility (EMC)

⚠ WARNING

The device conforms to the most stringent requirements of the relevant standards and regulations. Yet, the possibility of causing interference in other devices cannot be totally excluded.

Stabila LD 320


EN FCC statement (applicable in U.S.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Laser classification



The device produces visible laser beams, which are emitted from the instrument: It is a Class 2 laser product in accordance with:

- IEC 60825-1 : 2007 „Radiation safety of laser products“

Laser Class 2 products:

Do not stare into the laser beam or direct it towards other people unnecessarily. Eye protection is normally afforded by aversion responses including the blink reflex.

⚠ WARNING

Looking directly into the beam with optical aids (e.g. binoculars, telescopes) can be hazardous.

⚠ CAUTION

Looking into the laser beam may be hazardous to the eyes.

Labelling

Laser Radiation
Do not stare into the beam
Laser class 2
acc. IEC 60825-1:2007
Maximum radiant power: <1mW
Emitted wavelength: 620-690nm
Beam divergence: 0.16 x 0.6 mrad
Impulse duration: 0.2 x 10⁻⁹s - 0.8 x 10⁻⁹s

Stabila Management, Dorndorf, Hannover am Teufel

Subject to change (drawings, descriptions and technical data) without prior notice.

Stabila LD 320