



The New Edge in Fragrance Technology

AromaStat 1 User Manual



Eco-Scent is an affiliate of




www.eco-scent.com
256-229-5551

Lifetime Warranty

©2009 SnowMasters

This manual provides instructions for the panel operation of the AromaStat 1 Fragrance Delivery System once it has been connected to your HVAC system. Please read all the instructions.

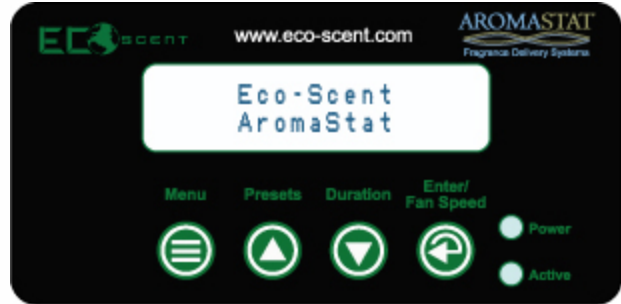



General Notes: The **Presets (Up)** and **Duration (Down)** buttons scroll through available options. The **Enter** button is used to implement the desired option.

- 1 With the machine plugged into a power source, turn on the red power switch on the right side of the unit. The LCD panel will light and the opening display will alternate between "EcoScent AromaStat" and the current *time/Presets*. Also, the green power light will glow.

- 2 At the opening screen, press the **Menu** button once. 

"Presets" appears on the display. The **Up** and **Down** arrows may now be used to scroll through this and other options, including "Manual Override", and "Set Time & Date", "Preset Configuration" and "Information". See the following steps for details on these options.

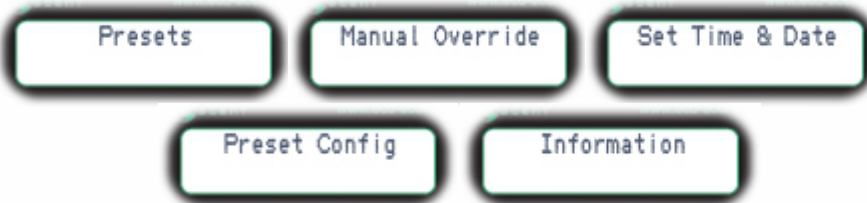

- 3 With the "Presets" option visible, click the **Enter** button. 

Now use the **Up** and **Down** arrows to scroll through the available Presets. When the desired Preset is displayed, press **Enter**. The display returns to the opening screen.




Preset Times	
Restaurant	11:00am - 9:00pm
Hotel	6:30am - 9:30am & 2:30pm - 9:30pm
Retail	9:30am - 6:30pm
Home	M-F: 6:30am - 9:30am & 4:00pm - 8:00pm Sa-Su: 7:00am - 4:00pm


(NOTE: The "Presets" may also be directly accessed by pressing the **Presets** button at the opening screen.)



- 4 With the "Manual Override" option visible, press **Enter**.



Use the **Up** and **Down** arrows to scroll through the available Manual Override options. The options are from "OFF" up to 12 hours ("12h 00m"), in 15 minute increments. When the desired option is displayed, press **Enter**. The display returns to the opening screen.

- 5 With the "Set Time & Date" option visible, press **Enter**.



The date appears on the screen with 2 arrows above the month. Use the **Up** and **Down** arrows to change the number & then press **Enter**. Do the same with the day, the year, and the time. When **Enter** is pressed the last time, the display returns to the opening screen.



- 6 With the "Preset Config" option visible, click the **Enter** button.



Now use **Up** and **Down** to choose either "Preset Option Custom 1" or "Preset Option Custom 2". Press **Enter**. The display shows "Start Time:" and a time. Use **Up** and **Down** to change the time (by 1 hour increments). Press **Enter** twice. The display now shows "Stop Time:" and a time. Set and Enter the desired time. The display returns to "Preset Custom #".







- 7 With the "Information" option visible, press **Enter**.



The installed software version is displayed, "Firmware Version 2.5.A". Press **Enter**. The display returns to "Information".



- 8 At the opening screen, press the **Duration** button once.



The current "Duration" setting appears on the display. Press **Up** and **Down** to choose from durations of "Short" (60 sec on, 180 sec off), "Medium" (60 sec on, 60 sec off), or "Long" (180 sec on, 60 sec off). Press **Enter**. The display returns to the opening screen.





- 9 At the opening screen, press the **Enter/Fan Speed** button once.



The current "*Fan Speed*" setting appears on the display. Press **Up** and **Down** to choose from speeds of "1" to "8". Press **Enter**. The display returns to the opening screen.



Additional Notes:

- 1) The light with the label "Active" will glow when scent is being dispensed.
- 2) If the machine malfunctions, turn the power off, wait 30 seconds, and turn it back on. If it continues to malfunction, call our 24 Hour Technical Support at 888-391-7669.