



## Overview

### HP Elite x2 1011 G1

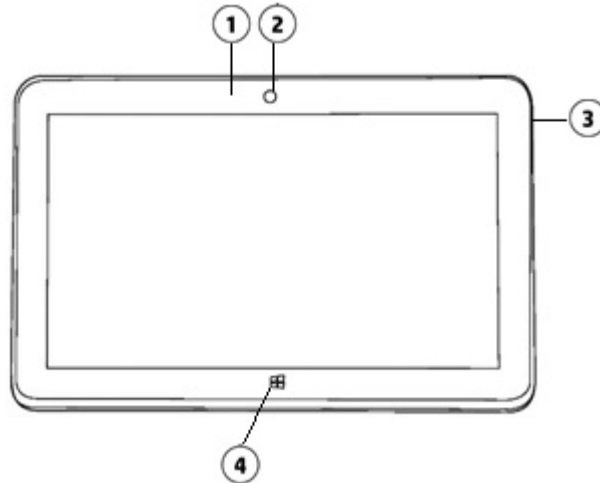


#### Tablet

- 1. Webcam LED
- 2. Webcam
- 3. Mic
- 4. Home button

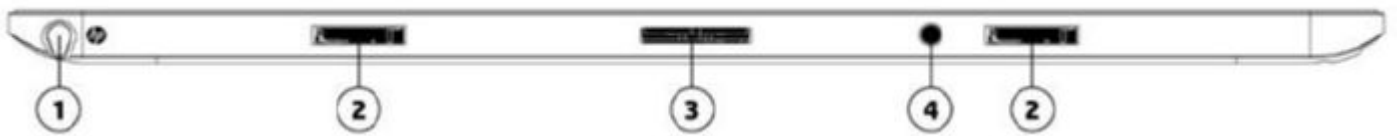

#### Tablet Bottom

- 1. Pen holder (select models only)
- 2. Alignment post connectors
- 3. Docking connector to power keyboard
- 4. Combo audio jack

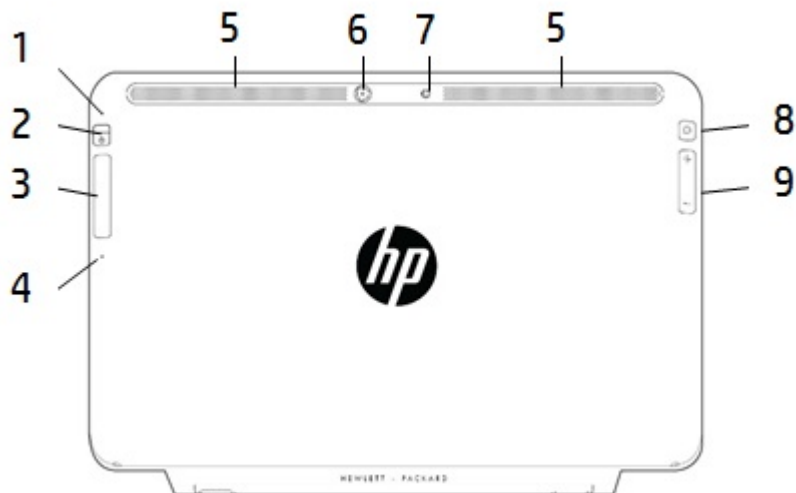


#### Back

- 1. Mic hole
- 5. Vents

## Overview


2. Power button
3. SIM/ SD Card
4. SIM/ SD Card eject hole
9. Volume button
6. Camera
7. Camera flash
8. Rotation lock button

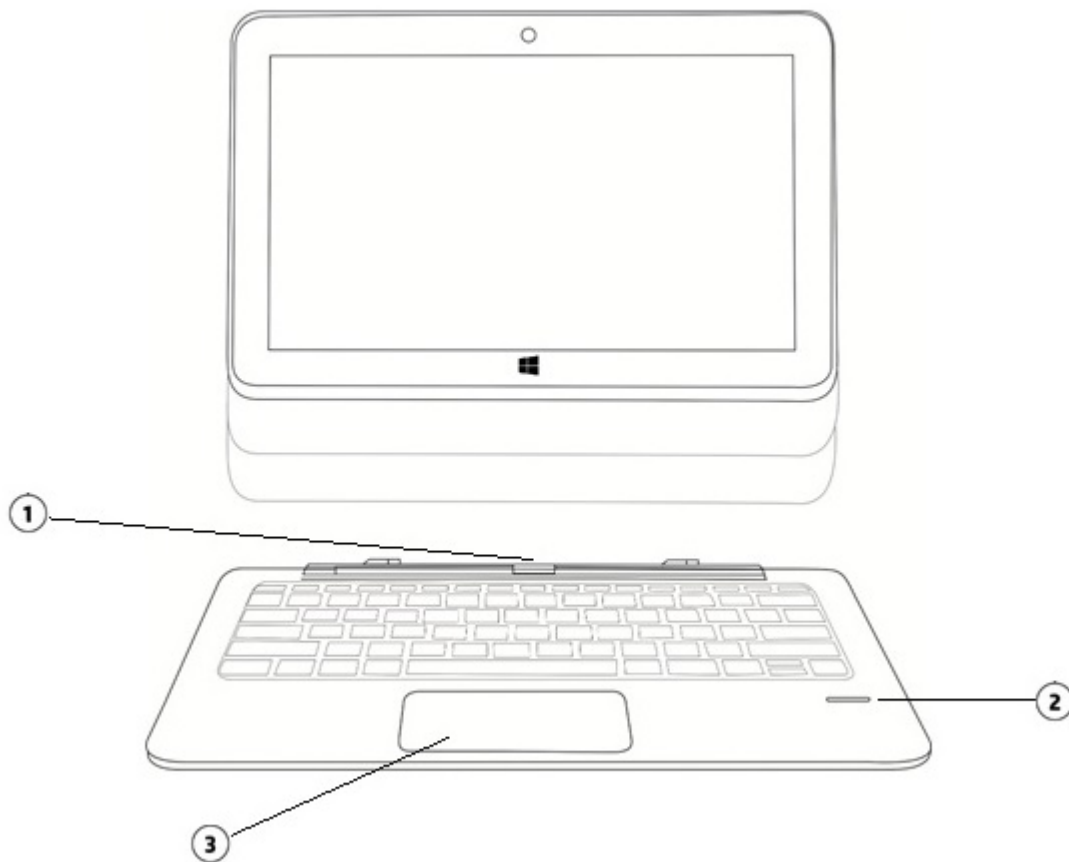

### Tablet and Keyboard


1. Docking connector to tablet
2. Fingerprint reader
3. Force Pad™

## Overview

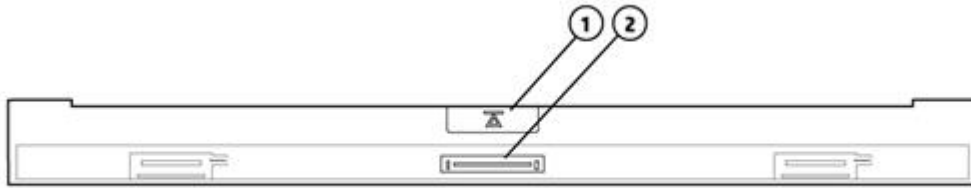


### Keyboard Bottom

- 1. Release button
- 2. Docking connector to tablet

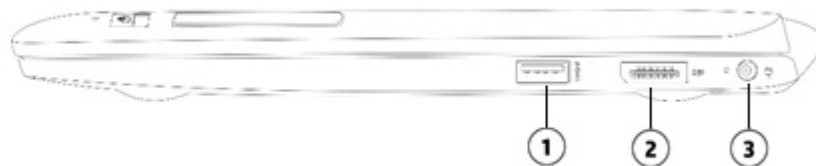

### Tablet and Keyboard side view (right)

- 1. USB charging (powered) port
- 2. Display port
- 3. 4.5 mm power connector

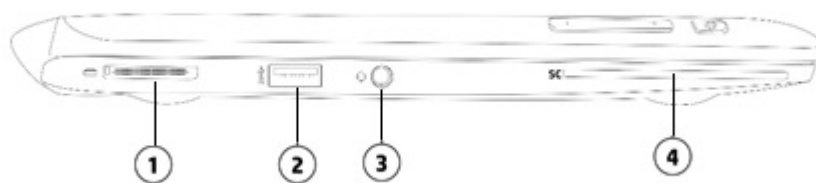

### Tablet and Keyboard side view

- 1. Docking connector for Elitepad dongle support
- 2. USB port
- 3. Stereo headphone-out/mic-in combo jack
- 4. Smart card reader

### Overview

#### At A Glance

- Designed for excellent mobility this stylish and thin 2-in-1 design is built to the standards of Elite durability
- Windows 8.1 versions, Windows 7 Pro 64 bit (available through downgrade rights from Windows 8.1 Pro), or FreeDOS
- 5<sup>th</sup> Generation Intel® Core™ M processors
- 11.6" diagonal LED-backlit HD BV UWVA eDP 1.2 Ultra-slim (1366 x 768) or 11.6" diagonal LED-backlit FHD BV UWVA eDP 1.3 Ultra-slim (1920 x 1080) Touch Screens
- Solid State Drives up to 512 GB
- Starting weight at 0.87 kg/ 1.92 lb for Tablet, 0.78 kg/ 1.71 lb for Power keyboard and 0.54 kg/ 1.19 lb for Travel keyboard
- Height starting 1.07 cm / 0.42 in thin for Tablet and 2.08 cm / 0.82 in for Tablet and Power keyboard
- DTS Studio Sound™; Dual microphone array with HP Advanced Noise Reduction Software
- Front and Back facing camera and webcam
- Long Life Polymer battery on Tablet and Power keyboard (Select model only)
- Supports a broad range of wireless options, for connectivity on the go
- Create more and work in comfort on the spill resistant, backlit power keyboard that features an industry first reflex hinge design to provide greater stability for your touch and pen\* experience
- Protect your device and data using the latest HP security technology solutions: HP Sure Start, HP BIOSphere and HP Client Security. Further optimize system security using certified TPM and optional Self-Encrypting Drive (SED) built-in the tablet and the integrated smart card reader and fingerprint reader on the power keyboard.
- Standard commercial 1 year limited warranty with upgrade available with optional HP Care Packs.

\*The Wacom Pen is available as a configurable option available on models ordered with a digitizer screen. Models without a built-in digitizer are incompatible with the Pen.

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Features

#### PRODUCT NAME

HP Elite x2 1011 G1

#### OPERATING SYSTEM

<b>Preinstalled</b>	Windows 8.1 Pro for Education 64*
	Windows 8.1 Pro 64 (National Academic Only)*
	Windows 8.1 64*
	Windows 8.1 Single Language 64*
	Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro 64)**
	Windows 7 Professional 64 (National Academic only)*
	FreeDOS 2.0

\* Not all features are available in all editions and versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com/>

\*\* This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

#### PROCESSOR\*

Intel® Core™ M-5Y71 with Intel HD Graphics 5300 (1.2 GHz, up to 2.9 GHz with Intel Turbo Boost Technology, 4 MB cache, 2 cores, vPro Support )

Intel® Core™ M-5Y51 with Intel HD Graphics 5300 (1.1 GHz, up to 2.6 GHz with Intel Turbo Boost Technology, 4 MB cache, 2 cores)

Intel® Core™ M-5Y10c with Intel HD Graphics 5300 (800 MHz, up to 2 GHz with Intel Turbo Boost Technology, 4 MB cache, 2 cores)

\* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

\*\* Intel® Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system configuration. See [www.intel.com/technology/turboboost](http://www.intel.com/technology/turboboost) for more information.

#### CHIPSET

Integrated with processor

#### GRAPHICS

Intel® HD Graphics 5300

## Features

### DISPLAY

#### Internal

##### Touch Screen

11.6" diagonal LED-backlit HD\* BV UWVA eDP 1.2 Ultra-slim (1366 x 768) Touch

11.6" diagonal LED-backlit FHD\* BV UWVA eDP 1.3 Ultra-slim (1920 x 1080) Touch

#### External

Up to 3840x2160@60hz for a single display, lower with additional displays connected

24-bit + 8 bit alpha channel (standard)

Up to 30-bit per pixel color depth (Wide Color Gamut)

\* HD content required to view HD images.

**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

### STORAGE AND DRIVES

#### Internal Storage\*

Supports M.2 SSD SS 2280

128 GB SATA III Solid State Drive

180 GB SATA III Solid State Drive

180 GB SATA III SED OPAL2 Solid State Drive

256 GB SATA III Solid State Drive

256 GB SATA III SED OPAL2 Solid State Drive

512 GB SATA III Solid State Drive

\* For SSD's, GB=1 billion bytes. TB=1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 8.1) of system disk is reserved for system recovery software.

### MEMORY

LPDDR3 (1600 MT/s)

Supports Dual Channel Memory

Soldered Down

#### Standard

4 GB Total System Memory

8 GB Total System Memory

#### Maximum

Up to 8 GB

## Features

### NETWORKING/COMMUNICATIONS

#### Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and is supported via combo card.

#### Wireless WAN (WWAN)\*

HP hs3110 HSPA+ Mobile Broadband

HP It4112 LTE/HSPA+ Qualcomm® Gobi™ 4G Mobile Broadband\*

HP It4211 LTE/EV-DO/HSPA+ Qualcomm® Gobi™ 4G Mobile Broadband\*

HP It4225 LTE/EV-DO Qualcomm® Gobi™ 4G Module\*

HP It4226 LTE/HSPA+ Qualcomm® Gobi™ 4G Module\*

#### Wireless LAN (WLAN)\*\*

Intel® Tri Band Wireless-AC 17265 802.11a/b/g/n/ac (2x2) and Bluetooth® 4.0 + WiGig Combo\*\*\*

Intel® Dual Band Wireless-AC 7265 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.0 Combo

Intel® Dual Band Wireless-AN 7265 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo

\* WWAN is an optional feature and requires factory configuration. WWAN connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, in all regions

\*\*Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

\*\*\*The WiGig-compatible notebook or tablet must be positioned within 1.2 m (4 ft) and without obstruction in the line of sight of the wireless dock. HP Advanced Wireless Docking is compatible with the HP Elite x2 1011 G1 with an optional installed Intel Tri Band Wireless AC with WiGig Combo card.

### AUDIO/MULTIMEDIA

#### Audio

DTS Studio Sound™

Dual speakers (front facing)

Dual microphone array with echo cancellation, noise suppression

Headphone line-out and microphone-in (combo)

HP Advanced Noise Reduction Software

#### Camera – Front

Integrated 2 MP (1080p)

- 1080p format for video
- 2 MP for still capture
- Supports videoconferencing\*\* and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1920x1080 resolution (1080p) and up to 30 fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing\*\*
- Improved low light sensitivity
- Improved dynamic range

#### Camera – Back

Integrated 5 MP (1080p)

- 1080p format for video
- 5 MP for still capture
- Supports videoconferencing\* and still image capture
- High quality auto focus lens

### Features

- Video capture at various resolutions up to 1920x1080 resolution (1080p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing\*\*
- Improved low light sensitivity
- Improved dynamic range

\* Internet access required.

### KEYBOARDS/ FUNCTION KEYS/ForcePad™

#### Keyboard

Spill-resistant with drain  
Backlit  
Dura Keys

#### Function Keys

F1 - Blank  
F2 - ForcePad™  
F3 - Sleep  
F4 - Display Switching  
F5 - Mute  
F6 - Volume Down  
F7 - Volume Up  
F8 - Mic Mute  
F9 - Brightness Down  
F10 - Brightness Up  
F11 - Backlight Toggle  
F12 - Wireless On/Off

#### ForcePad™

Glass with chemical etched surface  
Supports 2-way scroll  
Taps enabled as default  
Gestures enabled by default - 2 Finger Scrolling, 2 Finger Zoom (Pinch)

#### Optional HP Elite x2 1011 G1 Travel Keyboard\*

Help protect your HP Elite x2 1011 G1 Tablet screen and work smarter on the go with a full-featured HP Elite x2 1011 G1 Travel Keyboard—a wraparound cover and keyboard in one.

- 1 USB 3.0 port
- 1 Combo mic-in / Stereo Headphone Jack
- 1 Jacket Interface Connector
- 1 DC in jack 4.5MM

\*Sold separately or as an optional feature

#### Dimensions for Travel Keyboard (w x d x h)

296 x 210 x 6 mm / 11.65 x 8.27 x .24 in

#### Weight for Travel Keyboard

.54 kg / 1.19 lbs

#### Power keyboard

Backlit  
ClickPad

#### Function Keys

F1 - Ambient Light Sensor  
F2 - ClickPad  
F3 - Sleep



## Features

- F4 - Display Switching
- F5 - Mute
- F6 - Volume Down
- F7 - Volume Up
- F8 - Mic Mute
- F9 - Brightness Down
- F10 - Brightness Up
- F11 - Backlight Toggle (Backlit KB ONLY)
- F12 - Wireless On/Off

## SOFTWARE AND SECURITY

### Preinstalled Software with Windows Operating System

#### BIOS

- HP BIOSphere<sup>1</sup>
- HP Sure Start
- HP DriveLock | HP Automatic DriveLock
- HP BIOS Protection<sup>2</sup>
- HP Disk Sanitizer<sup>3</sup>
- HP SpareKey<sup>4</sup>
- BIOS Update via Network
- Master Boot Record Security
- Power On Authentication
- Pre-Boot Security
- Secure Erase<sup>5</sup>
- Hybrid Boot (Windows 8.1 only)
- Measured Boot (Windows 8.1 only)
- Secure Boot (Windows 8.1 only)
- Absolute Persistence Module<sup>6</sup>

#### MultiMedia

- Cyberlink Power2Go
- Cyberlink Power DVD
- Cyberlink YouCam BE (Windows 7 only)

#### Communication

- HP GPS and Location (Windows 7 only)<sup>7</sup>
- HP Connection Manager with support for HP Mobile Connect (Windows 7 only)<sup>8</sup>
- HP Mobile Connect (Windows 8.1 only)
- HP Wireless Hotspot (Windows 8.1 only)<sup>9</sup>
- Intel WiDi Software<sup>10</sup>
- HP Roaming Alert (Windows 8.1 only)

#### HP Value Add Software

- HP 3D DriveGuard
- HP ePrint Driver (HP Exclusive)<sup>11</sup>
- HP Hotkey
- HP PageLift
- HP Support Assistant
- HP Recovery Manager (Windows 7 only)
- HP Recovery Disc Creator (Windows 7 only)

#### 3rd Party

- Box 50 GB Offer<sup>19</sup>
- Box Application (Windows 8.1 only)
- Foxit PhantomPDF Express for HP<sup>20</sup>
- Netflix Application (Windows 8.1 only)

### Features

#### Microsoft Products

Buy Office  
Bing Search  
Skype<sup>12</sup>

#### Manageability

HP Driver Packs <sup>13</sup>  
HP SoftPaq Download Manager (SDM)  
HP System Software Manager (SSM)<sup>13</sup>  
HP BIOS Config Utility (BCU)<sup>13</sup>  
HP Client Catalog<sup>13</sup>  
HP CIK for Microsoft SCCM<sup>13</sup>  
LANDESK Management<sup>14</sup>  
HP Touchpoint Manager<sup>22</sup>

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

#### Client Security Software

HP Device Access Manager  
HP Drive Encryption <sup>15</sup>  
HP File Sanitizer <sup>16</sup>  
HP Security Manager  
HP SpareKey<sup>17</sup>  
Microsoft Security Essentials (Windows 7 only)<sup>18</sup>  
Microsoft Defender (Windows 8.1 only) <sup>18</sup>

#### Standard

TPM 1.2/2.0<sup>21</sup>  
HP Fingerprint Reader (on the power keyboard for selected models)  
Integrated Smart Card Reader (on the power keyboard for selected models)  
Pre-boot Authentication

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1. HP BIOSphere features may vary depending on the PC platform & configuration.
2. HP BIOS Protection requires a HPTools partition for automatic recovery.
3. For the use cases outlined in the DOD 5220.22-M Supplement. Does not support solid state drives and requires Windows.
4. Requires initial user set up.
5. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.
6. BIOS Absolute Persistence module is shipped turned off, and will be activated when customers purchase and activate a subscription. Service may be limited. Check with Absolute for availability outside the U.S. The optional subscription service of Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. If Data Delete is utilized, the Recovery Guarantee payment is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either create a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
7. GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.
8. HP Mobile Connect service requires a compatible CDMA or HSPA mobile broadband module and prepaid service purchase. Find coverage and availability for your service area at [hp.com/go/mobileconnect](http://hp.com/go/mobileconnect).
9. The HP Wireless Hotspot application requires an active internet connection and separately purchased data plan. While HP wireless hotspot is active, on-device applications will continue to work and will use the same data plan as the wireless hotspot. Wireless hotspot data usage may incur additional charges. Check with your service provider for plan details. Requires Windows 8.1 or HP Connection Manager for Windows 7.
10. Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, TV or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to

### Features

the projector, TV or computer monitor via a standard HDMI cable, also sold separately.

11. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see [www.hp.com/go/businessmobileprinting](http://www.hp.com/go/businessmobileprinting)).

12. Skype is not offered in China.

13. HP Driver Packs, HP System Software Manager (SSM), HP BIOS Config Utility (BCU), HP Client Catalog and HP CIK for Microsoft SCCM are available as a free download from the HP manageability website: manageability site is [www.hp.com/go/clientmanagement](http://www.hp.com/go/clientmanagement).

14. LANDesk is an optional feature sold separately. Managed devices must be connected to the management server. Location based functionality requires active LANDesk maintenance service. Wipe functionality performs a "Windows 8 Reset" and requires Windows 8. Lock performs a Windows "Lock Computer."

15. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access. Requires Windows.

16. Managed devices must be connected to the management server. Location based functionality requires active LANDesk maintenance service. Wipe functionality performs a "Windows 8 Reset" and requires Windows 8. Lock performs a Windows "Lock Computer."

17. Requires initial user set up. Business Desktops don't support SpareKey in the BIOS.

18. Opt in and internet connection required for updates.

19. Box offer requires Box registration. Offer available to new Box users only. Offer subject to change without notice. Box app requires Windows 8 or 8.1.

20. Read only.

21. Firmware TPM is version 2.0. Hardware TPM is v1.2, which is a subset of the TPM 2.0 specification version v0.89

22. HP Touchpoint Manager supports Android™, iOS and Windows operating systems and PCs, notebooks, tablets and smartphones from various manufacturers. Not available in all countries see [www.hp.com/touchpoint](http://www.hp.com/touchpoint) for availability information. Touchpoint Manager require purchase of a subscription. Out-of-band HP only Wipe, Lock, Unlock and reporting of BIOS boot error codes is planned to be available on select HP EliteBooks and tablets and requires Intel® vPro™ technology and functions in S3/Sleep, S4/Hibernate and S5/Soft Off power states.

### POWER

#### Power Supply

45W Smart RC AC Adapter (Not available for ASIA, INDIA, JPN2, JPN/ENG, PR)

45W 2-pin AC Adapter (Available for JPN2, JPN/ENG)

65W Smart EM AC Adapter (Available for ASIA, PRC, INDIA)

65W Slim AC Adapter(Available for AUST, JPN2, JPN/ENG includes DC Cable and tips)

Power dongle for 70 pin to 4.5mm power adapter (Tablet only)

Power cord is configurable; either 3.2 feet or 6 feet (1.0 or 1.8 meter)\*

\*2-wire plug - 1.0m available for JPN2, JPN/ENG, 3-wire plug - 1m and 3-wire plug - 1.8m not available for JPN2, JPN/ENG)

#### Tablet - Battery

2-cell Long Life Polymer (33 WHr)

#### Power keyboard - Battery

6-cell Long Life Polymer (21 WHr)

#### Battery Life\*

TBD

Battery is non removable, system reset with 15 second \*

#### System Standby Time

TBD\*

\* Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

## Features

### ENVIRONMENTAL

TBD

### WEIGHTS & DIMENSIONS

#### Weight

##### Tablet only

Starting at 0.87 kg/ 1.92 lb

##### Tablet with Power Keyboard

Starting at 1.65kg/ 3.63 lb

#### Dimensions - (w x d x h)

##### Tablet

29.8 x 19.27 x 1.07 cm / 11.73 x 7.58 x 0.42 in

##### Tablet with Power Keyboard

29.8 x 20.42 x 2.08 cm/11.73 x 8.04 x 0.82 in

**NOTE:** Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components.

### PORTS/SLOTS

#### Ports

##### Tablet

1 Docking connector to the tablet  
1 Micro SIM  
1 Headphone /microphone combo  
Micro SD Media Reader Slot - Supports SD, SDHC, SDXC

##### Base

1 DisplayPort 1.2  
1 USB 3.0 Charging Port  
1 USB 3.0 Port  
1 Smart Card Reader  
1 Docking connector (Elitepad dongle support only)  
1 Headphone/Microphone Combo

#### Travel keyboard

### SERVICE AND SUPPORT

HP Services offers 3-year, 1-year and 90 day limited warranty options depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>.

Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc).

## Technical Specifications

### SYSTEM UNIT

<b>Stand-Alone Power Requirements (AC Power)</b>	<b>Nominal Operating Voltage</b>	19.5 V
	<b>Average Operating Power</b>	13.6W
	<b>Max Operating Power</b>	< 65 W
<b>Temperature</b>	<b>Operating</b>	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	<b>Non-operating</b>	-4° to 140° F (-20° to 60° C)
<b>Relative Humidity</b>	<b>Operating</b>	10% to 90%, non-condensing
	<b>Non-operating</b>	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
<b>Shock</b>	<b>Operating</b>	40 G, 2 ms, half-sine
	<b>Non-operating</b>	240 G, 2 ms, half-sine
<b>Random Vibration</b>	<b>Operating</b>	1.043 grms
	<b>Non-operating</b>	3.50 grms
<b>Altitude (unpressurized)</b>	<b>Operating</b>	-50 to 10,000 ft (-15.24 to 3,048 m)
	<b>Non-operating</b>	-50 to 40,000 ft (-15.24 to 12,192 m)

### DISPLAYS

<b>11.6" diagonal LED-backlit HD UWVA Ultralim (1366 x 768)</b>	<b>Outline Dimensions (W x H x D)</b>	27.05 x 15.95 x 0.25 cm		
	<b>Active Area</b>	25.6125 x 14.4 cm		
	<b>Weight</b>	170g (max)		
	<b>Diagonal Size</b>	11.6" in		
	<b>Surface Treatment</b>	Anti-glare		
	<b>Contrast Ratio</b>	800:1 (min)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	400 nit (typical)		
	<b>Pixel Resolution</b>	<b>Format</b>	1366 x 768 (HD)	
		<b>Configuration</b>	RGB Stripe	
	<b>Interface</b>	eDP 1.2		
	<b>LCD Mode</b>	IPS/FFS/VA		
	<b>PPI</b>	135 ppi		
	<b>Viewing Angle</b>	UWVA 85/85/85/85 (Left/Right/Down/Up)		

## Technical Specifications

<b>11.6" diagonal LED-backlit FHD UWVA Ultralim (1920 x 1080)</b>	<b>Outline Dimensions</b>	27.05 x 15.95 x 0.25 cm (W x H x D)		
	<b>Active Area</b>	25.632 x 14.418 cm		
	<b>Weight</b>	160g (max)		
	<b>Diagonal Size</b>	11.6" in		
	<b>Surface Treatment</b>	Anti-glare		
	<b>Contrast Ratio</b>	800:1 (min)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	400 nit (typical)		
	<b>Pixel Resolution</b>	<b>Format</b>	<b>1920 x 1080 (FHD)</b>	
		<b>Configuration</b>	RGB Stripe	
	<b>Interface</b>	eDP 1.3		
	<b>LCD Mode</b>	IPS/FFS/VA		
	<b>PPI</b>	160 ppi		
	<b>Viewing Angle</b>	UWVA 85/85/85/85 (Left/Right/Down/Up)		

## STORAGE AND DRIVES

### Internal Storage

<b>128 GB* M.2 Solid State Drive</b>	<b>Drive Weight</b>	10 grams		
	<b>Capacity</b>	128 GB		
	<b>Height</b>	0.14 in (3.58 mm)		
	<b>Width</b>	0.87 in (22 mm)		
	<b>Interface</b>	SATA 3 (6 Gb/s)		
	<b>Performance</b>	<b>Maximum Sequential Read</b>	Up to 520 MB/s	
		<b>Maximum Sequential Write</b>	Up to 150 MB/s	
	<b>Logical Blocks</b>	250,069,680		
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]		
	<b>Features</b>	ATA Security; ATA-8; SATA 3.0; DIPM; TRIM; DVESLP		

<b>180 GB* M.2 Solid State Drive</b>	<b>Drive Weight</b>	10 grams		
	<b>Capacity</b>	180 GB		
	<b>Height</b>	0.09 in (2.38 mm)		
	<b>Width</b>	0.87 in (22 mm)		
	<b>Interface</b>	SATA Gen 3 (6 Gb/s)		
	<b>Performance</b>	<b>Maximum Sequential Read</b>	Up to 540 MB/s	
		<b>Maximum Sequential Write</b>	Up to 490 MB/s	
	<b>Logical Blocks</b>	351,651,888		
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]		
	<b>Features</b>	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM; DEVSLP		

## Technical Specifications

<b>180 GB* M.2 Solid State Drive</b>	<b>Weight</b>	10 grams	
<b>Opal 2 Drive</b>	<b>Capacity</b>	180 GB	
	<b>Height</b>	0.09 in (2.38 mm)	
	<b>Width</b>	0.87 in (22 mm)	
	<b>Interface</b>	SATA Gen 3 (6 Gb/s)	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 540 MB/s	Up to 490 MB/s
	<b>Logical Blocks</b>	351,651,888	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM; DEVSLP	

<b>256 GB* M.2 Solid State Drive</b>	<b>Weight</b>	10 grams	
	<b>Capacity</b>	256 GB	
	<b>Height</b>	0.14 in (3.58 mm)	
	<b>Width</b>	0.87 in (22 mm)	
	<b>Interface</b>	SATA Gen 3 (6 Gb/s)	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 520 MB/s	Up to 300 MB/s
	<b>Logical Blocks</b>	500,118,192	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM; DEVSLP	

<b>256 GB* M.2 Solid State Drive</b>	<b>Weight</b>	10 grams	
<b>Opal 2 Drive</b>	<b>Capacity</b>	256 GB	
	<b>Height</b>	0.14 in (3.58 mm)	
	<b>Width</b>	0.87 in (22 mm)	
	<b>Interface</b>	SATA Gen 3 (6 Gb/s)	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 520 MB/s	Up to 300 MB/s
	<b>Logical Blocks</b>	500,118,192	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM; DEVSLP	

## Technical Specifications

<b>512 GB* M.2 Solid State Drive</b>	<b>Weight</b>	10 grams	
	<b>Capacity</b>	512 GB	
	<b>Height</b>	0.09 in (2.38 mm)	
	<b>Width</b>	0.87 in (22 mm)	
	<b>Interface</b>	SATA Gen 3 (6 Gb/s)	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 450 MB/s	Up to 400 MB/s
	<b>Logical Blocks</b>	500,118,192	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM; DEVSLP	

## SECURITY

<b>HP Fingerprint Sensor (optional)</b>	<b>Mobile Voltage Operation</b>	3.0V-3.6V
	<b>Operating Temperature</b>	14° - 167°F (-10° - 75°C)
	<b>Current Consumption</b>	36 mA peak
	<b>Image</b>	
	<b>Low Latency Wait for Finger</b>	950 uA
	<b>Capture Rate</b>	30 cm/sec
	<b>ESD Resistance</b>	IEC 61000-4-2 4B (±15KV)
	<b>Detection Matrix</b>	200*1 (plus another secondary line) 508 dpi 12*3 mm sensor area

## NETWORKING/COMMUNICATIONS

### HP hs3110 HSPA+ Mobile Broadband Module

<b>Technology/Operating Bands</b>	HSPA+: 2100 (Band 1), 1900 (Band 2), 1700 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 MHz (Band 5), 900 (Band 8) MHz
<b>Wireless Protocol Standards</b>	E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 7
<b>GPS</b>	Standalone, A-GPS
<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum Data Rates</b>	HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) HSPA: 7.2 Mbps (Download), 5.76 Mbps (Upload) WCDMA PS: 384 kbps (Download), 384 kbps (Upload) WCDMA CS: 64 kbps (Download), 64 kbps (Upload) E-GPRS: 296 kbps (Download), 236.8 kbps (Upload) GPRS: 107 kbps (Download), 85.6 kbps (Upload)
<b>Maximum Output Power</b>	HSPA+: 24 dBm E-GPRS 1800/1900: 26 dBm E-GPRS 850/900: 27 dBm GPRS 1800/1900: 30 dBm GPRS 850/900: 33 dBm



### Technical Specifications

<b>Maximum Power Consumption</b>	2500 mA (peak); 600 mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6 g
<b>Dimensions</b> (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

#### HP It4211 LTE/EV-DO/HSPA+ Gobi 4G Module

<b>Technology/Operating bands</b>	LTE: 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 700 (Band 13 upper SMH), 700 (Band 17 lower SMH), 1900 MHz (Band 25, extended PCS) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz EV-DO: 800 (BC0), 1900 (BC1) MHz
-----------------------------------	---

<b>Wireless Protocol Standards</b>	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9 EVDO Release 0 and Release A
------------------------------------	---

<b>GPS</b>	Standalone, A-GPS
------------	-------------------

<b>GPS Bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
------------------	---

<b>Maximum data rates</b>	LTE: 100 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload) CDMA 1x: DL 153.6 kbps/UL 153.6 kbps EVDO Rev.A: DL 3.1 Mbps/UL 1.8 Mbps
---------------------------	---

<b>Maximum output power</b>	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm CDMA/EVDO: 24dBm
-----------------------------	--

<b>Maximum Power Consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average) EVDO: 1000mA (peak); 720mA (average)
----------------------------------	---

<b>Form Factor</b>	M.2, 3042-S3 Key B
--------------------	--------------------

<b>Weight</b>	6 g
---------------	-----

<b>Dimensions</b> (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)
--	--

### Technical Specifications

#### HP It4211 LTE/EV-DO/HSPA+ Gobi 4G Module

<b>Technology/Operating Bands</b>	LTE: 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 700 (Band 13 upper SMH), 700 (Band 17 lower SMH), 1900 MHz (Band 25, extended PCS) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz EV-DO: 800 (BC0), 1900 (BC1) MHz
<b>Wireless Protocol Standards</b>	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9 EVDO Release 0 and Release A
<b>GPS</b>	Standalone, A-GPS
<b>GPS Bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum Data Rates</b>	LTE: 100 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload) CDMA 1x: DL 153.6 kbps/UL 153.6 kbps EVDO Rev.A: DL 3.1 Mbps/UL 1.8 Mbps
<b>Maximum Output Power</b>	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm CDMA/EVDO: 24dBm
<b>Maximum Power Consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average) EVDO: 1000mA (peak); 720mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6 g
<b>Dimensions</b> (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

## Technical Specifications

### HP It2522 LTE/EV-DO Mobile Broadband Module (VZW)

<b>Technology/Operating Bands</b>	LTE: 700 (Band 13 upper SMH) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz EV-DO: 800 (BC0), 1900 (BC1) MHz
<b>Wireless Protocol Standards</b>	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9 EVDO Release 0 and Release A
<b>GPS</b>	Standalone, A-GPS
<b>GPS Bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum Data Rates</b>	LTE: 100 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload) CDMA 1x: DL 153.6 kbps/UL 153.6 kbps EVDO Rev.A: DL 3.1 Mbps/UL 1.8 Mbps
<b>Maximum Output Power</b>	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm CDMA/EVDO: 24dBm
<b>Maximum Power Consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average) EVDO: 1000mA (peak); 720mA (average)
<b>Form Factor</b>	MiniCard
<b>Weight</b>	TBD
<b>Dimensions</b> (Length x Width x Thickness)	56.05 x 30 x 5 mm

### HP It4226 LTE/HSPA+ Gobi 4G Module

<b>Technology/Operating Bands</b>	LTE: 2100 (Band 1), 800 (Band 19, Japan 800 upper), 1450 (Band 21) HSPA+: 2100 (Band 1), 800 (Band 6), 800 (Band 19) MHz
<b>Wireless Protocol Standards</b>	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification
<b>GPS</b>	Standalone, A-GPS
<b>GPS Bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum Data Rates</b>	LTE: 100 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload)
<b>Maximum Output Power</b>	LTE: 23 dBm HSPA+: 23.5 dBm
<b>Maximum Power Consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6 g

### Technical Specifications

**Dimensions** (Length x Width x Thickness) 1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

\* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

<b>WLAN</b>			
<b>Intel® Tri Band Wireless-AC 17265 802.11a/b/g/n/ac (2x2) and Bluetooth® 4.0 + WiGig Combo***</b>	<b>Form Factor</b>	Combo Module, M.2 3030-S3-A	
	<b>Dimensions</b>	30.00±0.15mm by 30.00±0.15mm by 2.38mm max.	
	<b>Weight</b>	4 grams	
	<b>Operating Voltage</b>	3.3 Volts	
	<b>Power Consumption</b>	TBD	
	<b>Power Management</b>	Win8.1 Connected Standby	Supports Win8.1 Connected Standby mode, and ensuing RTD3 (real time D3) flows
		CPPM Gen 1	Supports CPPM (Converged Platform Power Management) Gen1
		ACPIv3.0	Implements according to the ACPI v3.0 Specification
		ACPIv4.0	Implements according to the ACPI v4.0 Specification
		ACPIv5.0	Implements according to the ACPI v5.0 Specification
		Wake on WiGig	Able to trigger waking up the platform upon the following events: USB activity on the dock, while connected. Detection of a pre-paired WiGig dock. Disconnection.
	<b>Thermal Management</b>	Configurable TDP	Implements a mechanism which enables capping of the thermal dissipation of Device Module and R-FEM, Dock WiGig Module, R-FEM, independently, to a pre-configured limit per platform.
		Storing TDP limit	Module TDP limits are stored in a secured persistent memory in the platform (e.g., BIOS tables).
Thermal throttling		Module implements a WiGig-autonomous Thermal throttling mechanism, to prevent the silicones junction temperature from reaching the critical shutdown threshold.	
Maintaining connectivity while throttling		Module maintains an active WiGig link while in thermal throttling.	
Thermal Critical Shutdown		Module implements a WiGig-autonomous thermal critical shutdown mechanism, to protect the Silicones from permanent thermal damage.	
<b>Temperature</b>	Ambient	≤ 35°C	
	Operating	0° to +80°	
<b>Humidity</b>	Non-operating	50% to 90% RH non-condensing (at temperatures of 25°C to 35°C)	

## Technical Specifications

	<b>Altitude</b>	Operating Non-operating
	<b>LED Activity</b>	Amber and White, Solid on Flashing and 'Breathing' indicate link status and Standby/Sleep status (see dock user manual for details)
<b>Intel® Dual Band Wireless-AC 7265 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.0 Combo</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	<b>Interoperability Frequency Band</b>	Wi-Fi certified 802.11b/g/n <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> <p>Note:</p> <p>The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
		802.11a <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)             <ul style="list-style-type: none"> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul> </li> </ul> <p>Note:</p> <p>Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
	<b>Data Rates</b>	<ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps             <ul style="list-style-type: none"> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>• 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul> </li> </ul>
	<b>Modulation</b>	Direct Sequence Spread Spectrum
	<b>Security<sup>1</sup></b>	BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM <ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only             <ul style="list-style-type: none"> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul> </li> </ul>
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
	<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b : +16dBm minimum             <ul style="list-style-type: none"> <li>• 802.11g : +14dBm minimum</li> <li>• 802.11a : +14dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT20(5GHz) : +12dBm minimum</li> </ul> </li> </ul>

### Technical Specifications

	<ul style="list-style-type: none"> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> <li>• 802.11ac 80MHz(5GHz) : +11dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management
<b>Receiver Sensitivity<sup>3</sup></b>	802.11 compliant power saving mode 802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure  Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor Dimensions</b>	PCI-Express M.2 MiniCard Type 2230 : 2.3 x 22.0 x 30.0 mm
<b>Weight</b>	Or Type 1630 : 2.3 x 16.0 x 30.0 mm Type 2230 : 2.8g
<b>Operating Voltage</b>	Type 1630 : 2g
<b>Temperature</b>	3.3v +/- 9% Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> </ol>

#### HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

<b>Bluetooth Specification</b>	4.0+EDR Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	79 (1 MHz) available channels

## Technical Specifications

<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric												
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.												
<b>Receiver Sensitivity</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>?/4-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	?/4-DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
?/4-DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW												
<b>Range</b>	Up to 33 ft (10 m)												
<b>Electrical Interface</b>	USB 2.0 compliant												
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software												
<b>Link Topology</b>													
<b>Electrical Interface</b>	Point to Point, Multipoint Pico Nets up to 7 slaves												
<b>Bluetooth Software Supported</b>	Full support of Bluetooth Security Provisions												
<b>Security</b>													
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support												
<b>Power Management</b>	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
<b>Certifications</b>													
<b>Security</b>	All necessary regulatory approvals for supported countries, including:												
<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249												
<b>Bluetooth Profiles Supported</b>													
<b>Power Management</b>	ETS 300 328, ETS 300 826												
<b>Certifications</b>	Low Voltage Directive IEC950												
<b>Certifications</b>	UL, CSA, and CE Mark												
<b>Certifications</b>	Serial Port Profile (SPP) <sup>1</sup>												
<b>Certifications</b>	Service Discovery Application Profile (SDAP)												
<b>Certifications</b>	Dial-Up Networking (DUN) <sup>1,2</sup>												
<b>Certifications</b>	Generic Object Exchange Profile (GOEP) <sup>1,2</sup>												
<b>Certifications</b>	Object Push Profile (OPP) <sup>1,2</sup>												
<b>Certifications</b>	File Transfer Profile (FTP)												
<b>Certifications</b>	Synchronization Profile (SYNC)												
<b>Certifications</b>	Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	Personal Area Networking Profile (PAN) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	Human Interface Device Profile (HID) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	FAX Profile (FAX)												
<b>Bluetooth Profiles Supported</b>	Basic Imaging Profile (BIP) <sup>2</sup>												
<b>Bluetooth Profiles Supported</b>	Headset Profile (HSP)												
<b>Bluetooth Profiles Supported</b>	Hands Free Profile (HFP)												
<b>Bluetooth Profiles Supported</b>	Advanced Audio Distribution Profile (A2DP)												

## Technical Specifications

<b>Intel® Dual Band Wireless-AN 7265 802.11a/b/g/n (2x2) and Bluetooth® 4.0 Combo</b>	<b>Wireless LAN Standards</b>  <b>Interoperability Frequency Band</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n Wi-Fi certified 802.11b/g/n
		<ul style="list-style-type: none"> <li>2.402 – 2.482 GHz</li> </ul>
		<p>Note:</p>
		<p>The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
		802.11a
		<ul style="list-style-type: none"> <li>4.9 – 4.95 GHz (Japan)           <ul style="list-style-type: none"> <li>5.15 – 5.25 GHz</li> <li>5.25 – 5.35 GHz</li> <li>5.47 – 5.725 GHz</li> <li>5.825 – 5.850 GHz</li> </ul> </li> </ul>
		<p>Note:</p>
		<p>Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
<b>Antenna Structure Data Rates</b>		2 transmit; 2 receive (2x2) 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
<b>Modulation</b>		Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>		<ul style="list-style-type: none"> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>AES-CCMP: 128 bit in hardware</li> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>WAPI</li> </ul>
<b>Sub-channels</b>		Multinational support with frequency bands and channels compliant to local regulations.
<b>Network Architecture Models</b>		Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>		IEEE 802.11 compliant roaming between band Access Points
<b>Output Power<sup>2</sup></b>		<ul style="list-style-type: none"> <li>802.11b : +16dBm minimum</li> <li>802.11g : +14dBm minimum</li> <li>802.11a : +14dBm minimum</li> <li>802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>802.11n HT40(2.4GHz) : +13dBm minimum</li> </ul>



### Technical Specifications

	<ul style="list-style-type: none"> <li>• 802.11n HT20(5GHz) : +12dBm minimum</li> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications
<b>Dimensions</b>	PCI-Express M.2 MiniCard Type 2230 : 2.3 x 22.0 x 30.0 mm
<b>Weight</b>	Or Type 1630 : 2.3 x 16.0 x 30.0 mm Type 2230 : 2.8g
<b>Operating Voltage</b>	Or Type 1630 : 2g 3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber - Radio OFF; LED White - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

\*Wireless is an optional feature. Wireless access point and internet service

### Technical Specifications

required and sold separately. Availability of public wireless access points limited.

#### HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

**Bluetooth Specification** 4.0+EDR Compliant  
**Frequency Band** 2402 to 2480 MHz  
**Number of Available Channels** 79 (1 MHz) available channels  
**Data Rates and Throughput** 3 Mbps data rate; throughput up to 2.17 Mbps  
 Synchronous Connection Oriented links up to 3, 64 kbps, voice channels  
 Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric  
**Transmit Power** The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.

Receiver Sensitivity	Modulation	0.01% BER	0.001% BER
	GFSK	-80 dBm	-70 dBm
	π/4-DQPSK	-80 dBm	-70 dBm
	8DPSK	-80 dBm	-70 dBm

**Power Consumption** Peak (Tx) 330 mW  
 Peak (Rx) 230 mW  
 Selective Suspend 17 mW

**Range** Up to 33 ft (10 m)  
**Electrical Interface** USB 2.0 compliant

**Bluetooth Software Supported** Microsoft Windows Bluetooth Software

**Link Topology**  
**Electrical Interface** Point to Point, Multipoint Pico Nets up to 7 slaves

**Bluetooth Software Supported** Full support of Bluetooth Security Provisions

**Security**  
**Power Management** Microsoft Windows ACPI, and USB Bus Support

**Power Management** Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

**Certifications**  
**Security** All necessary regulatory approvals for supported countries, including:

**Certifications** FCC (47 CFR) Part 15C, Section 15.247 & 15.249

**Bluetooth Profiles Supported**  
**Power Management** ETS 300 328, ETS 300 826

**Certifications** Low Voltage Directive IEC950  
 UL, CSA, and CE Mark  
 Serial Port Profile (SPP)<sup>1</sup>  
 Service Discovery Application Profile (SDAP)  
 Dial-Up Networking (DUN)<sup>1,2</sup>  
 Generic Object Exchange Profile (GOEP)<sup>1,2</sup>  
 Object Push Profile (OPP)<sup>1,2</sup>  
 File Transfer Profile (FTP)

**Certifications** Synchronization Profile (SYNC)  
 Hard Copy Cable Replacement (HCRP)<sup>1,2</sup>  
 Personal Area Networking Profile (PAN)<sup>1,2</sup>

**Bluetooth Profiles Supported** Human Interface Device Profile (HID)<sup>1,2</sup>

### Technical Specifications

FAX Profile (FAX)  
Basic Imaging Profile (BIP)<sup>2</sup>  
Headset Profile (HSP)  
Hands Free Profile (HFP)  
Advanced Audio Distribution Profile (A2DP)

## AUDIO/MULTIMEDIA

<b>Hardware</b>	<b>Implementation</b>	B Realtek ALC3228 High Definition CODEC
	<b>Function Key Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes, dual digital microphone array
<b>Audio Output Quality</b>	<b>Frequency Response</b>	20 Hz - 20 kHz
	<b>Signal to Noise Ratio</b>	>85 dB
	<b>Total Harmonic Distortion</b>	0.01%
	<b>Noise Floor</b>	-110 dB
	<b>Play/Record Sampling Rate(s)</b>	8 kHz - 48kHz
	<b>DAC</b>	16, 20 or 24-bit
	<b>ADC</b>	16 or 20-bit
<b>Internal Stereo Speaker</b>	<b>Power Rating</b>	1.5Watt
	<b>Impedance</b>	8 ohms

## POWER

### Technical Specifications

<b>HP 45W Smart AC Adapter non-slim</b>	<b>Dimensions (H x W x D)</b>	95.0 x 40.0 x 26.5mm	
	<b>Input</b>	Input	90 to 265 VAC
		<b>Input Efficiency</b>	88% min at 115 VAC / 89% min at 230VAC
		<b>Input frequency range</b>	47 to 63 Hz
	<b>Output</b>	<b>Input AC current</b>	1.4 A at 90 VAC and maximum load
		<b>Output power</b>	45W
		<b>DC output</b>	19.5V
		<b>Hold-up time</b>	5 msec at 115 VAC input
		<b>Output current limit</b>	<8A, Over voltage protection- 29V max automatic shutdown
		<b>Connector</b>	3 pin/grounded, mates with 4.5mm barrel type Smart ID DC connector
	<b>Environmental Design</b>	<b>Operating temperature</b>	32° to 95° F (0° to 35° C)
		<b>Non-operating (storage) temperature</b>	-4° to 121° F (-20° to 85° C)
		<b>Altitude</b>	0 to 16,405 ft (0 to 5,000 m)
		<b>Humidity</b>	0% to 95%
<b>Storage Humidity</b>		0% to 95%	
<b>EMI and Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; Reliability - failure rate of less than 0.1% annually within the first three years of operation.		
<b>HP 45W Smart AC Adapter non-slim 2 prong</b>	<b>Dimensions (H x W x D)</b>	95.0 x 40.0 x 26.5mm	
	<b>Input</b>	Input	90 to 265 VAC
		<b>Input Efficiency</b>	88% min at 115 VAC / 89% min at 230VAC
		<b>Input frequency range</b>	47 to 63 Hz
	<b>Output</b>	<b>Input AC current</b>	1.4 A at 90 VAC and maximum load
		<b>Output power</b>	45W
		<b>DC output</b>	19.5V
		<b>Hold-up time</b>	5 msec at 115 VAC input
		<b>Output current limit</b>	<8A, Over voltage protection- 29V max automatic shutdown
		<b>Connector</b>	2 pin/non-grounded, mates with 4.5mm barrel type Smart ID DC connector
	<b>Environmental Design</b>	<b>Operating temperature</b>	32° to 95° F (0° to 35° C)
		<b>Non-operating (storage) temperature</b>	-4° to 121° F (-20° to 85° C)
		<b>Altitude</b>	0 to 16,405 ft (0 to 5,000 m)
		<b>Humidity</b>	0% to 95%
<b>Storage Humidity</b>		0% to 95%	

### Technical Specifications

**EMI and Safety Certifications** CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; Reliability - failure rate of less than 0.1% annually within the first three years of operation.

#### HP 65W EM Smart AC Adapter

**Dimensions** 126.0 x 50.0 x 30.0 mm  
**Weight** 300 g  
**Input** 90 to 265 VAC  
**Input Efficiency** 87% min at 115 VAC/230VAC  
**Input frequency range** 47 to 63 Hz  
**Input AC current** 1.7 A at 90 VAC  
**Output**  
**Output power** 65W  
**DC output** 19.5V  
**Hold-up time** 5 msec at 115 VAC input  
**Output current limit** <11A, Over voltage protection- 29V max automatic shutdown  
**Connector** 3 pin/grounded, mates with 4.5mm barrel type Smart ID DC connector  
**Environmental Design**  
**Operating temperature** 32° to 95° F (0° to 35° C)  
**Non-operating (storage) temperature** -4° to 185° F (-20° to 85° C)  
**Altitude** 0 to 16,405 ft (0 to 5,000 m)  
**Humidity** 20% to 95%  
**Storage Humidity** 10% to 95%  
**EMI and Safety Certifications** CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.

#### HP 65W Slim Smart AC Adapter

**Dimensions** 120.0 x 57.6 x 16.7 mm  
**Weight** 250 g  
**Input** 90 to 265 VAC  
**Input Efficiency** 88% min at 115 VAC / 89% min at 230VAC  
**Input frequency range** 47 to 63 Hz  
**Input AC current** 1.7 A at 90 VAC  
**Output**  
**Output power** 65W  
**DC output** 18.5V  
**Hold-up time** 5 msec at 115 VAC input  
**Output current limit** <11A, Over voltage protection- 29V max automatic shutdown  
**Connector** 3 pin/grounded, mates with interchangeable cords  
**Environmental Design**  
**Operating temperature** 32° to 104° F (0° to 40° C)  
**Non-operating (storage) temperature** -4° to 149° F (-20° to 65° C)  
**Altitude** 0 to 10,000 ft (0 to 3,048 m)

### Technical Specifications

		<b>Humidity</b>	20% to 80%
		<b>Storage Humidity</b>	10% to 90%
	<b>EMI and Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.	
<b>HP 2-cell Polymer Battery (33 WHr)</b>	<b>Cells/Type</b>	2-cell Polymer	
	<b>Watt-hour capacity</b>	33 WHr	
	<b>Temperature</b>	<b>Operating (Charging)</b>	32° to 113° F (0° to 45° C)
		<b>Operating (Discharging)</b>	14° to 140° F (-10° to 60° C)
		<b>Non-operating</b>	-4° to 140° F (-20° to 60° C)
	<b>Warranty</b>	3 year limited	
<b>HP 6-cell Polymer Battery (21 WHr)</b>	<b>Cells/Type</b>	6-cell Polymer	
	<b>Watt-hour capacity</b>	21 WHr	
	<b>Temperature</b>	<b>Operating (Charging)</b>	
		<b>Operating (Discharging)</b>	
		<b>Non-operating</b>	
	<b>Warranty</b>	3 year limited	

## ENVIRONMENTAL

**Eco-Label Certifications & declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT Silver registered in the United States. See <http://www.epeat.net> for registration status in your country.

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

### Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	7.04 W	6.9 W	6.96 W
Normal Operation (Long idle)	3.12 W	3.12 W	3.15 W
Sleep	0.33 W	0.43 W	0.33 W
Off	0.27 W	0.32 W	0.27 W

**Note:**

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for

### Technical Specifications

computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	24 BTU/hr	24 BTU/hr	24 BTU/hr
Normal Operation (Long idle)	11 BTU/hr	11 BTU/hr	11 BTU/hr
Sleep	1 BTU/hr	1 BTU/hr	1 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

\*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Typically Configured Idle	2.5	15
Fixed Disk Random writes	2.5	15

**Longevity and Upgrading** This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station
- 1 multi-bay II storage port
- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:  
Mercury greater the 1ppm by weight  
Cadmium greater than 20ppm by weight

Battery size: 2-cell high capacity Lithium-Ion battery (optional 6 cell battery)  
Battery type: Battery pack  
Battery size: CR2032 (coin cell)  
Battery type: Lithium

### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level, see [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 97.6% recycle-able when properly disposed of at end of life.

### Technical Specifications

<b>Packaging Materials</b>	<b>External:</b>	PAPER/Corrugated	328.5 g
	<b>Internal:</b>	PLASTIC/EPE - Expanded Polyethylene	16.4 g
		PLASTIC/Polyethylene low density	10.5 g

The plastic packaging material contains at least 50% recycled content.

The corrugated paper packaging materials contains at least 70% recycled content.

### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report





## Technical Specifications

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf>

[/PC\\_GBU\\_Product\\_Design\\_ISO\\_14K\\_Certificate.pdf](http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf)

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

## COUNTRY OF ORIGIN

China

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part number
<b>Carrying Cases</b>	HP Business Slim Top Load (up to 14.1" x .75" thick)	H5M91AA
	HP Executive Leather Messenger (up to 14.0" x 1")	K0A31AA
	HP Slim Ultrabook Messenger (up to 15.6" x .88"/22/5mm)	F3W14AA
	HP Slim Ultrabook Top Load (up to 15.6" x .88"/22/5mm)	F3W15AA
	HP Slim Ultrabook Backpack (up to 15.6" x .88"/22/5mm)	F3W16AA
	HP Ultrabook Sleeve (up to 12.5"/31.8cm x 1"/25.4mm)	F7Z98AA
	HP Ultrabook Sleeve (up to 14.0/35.6cm x 1"/25.4mm)	F7Z99AA
<b>Stands</b>	HP Adjustable Dual Monitor Stand	AW664AA#xxx
	HP Display and Notebook Stand II	E8G00AA#xxx
	HP Advanced Wireless Dock	F7M97AA#xxx
<b>Input Devices</b>	HP Wireless Mobile Mouse	H2L63AA
	HP X4000b Bluetooth Mouse	H3T50AA#xxx
	HP Ultra Mobile Wireless Mouse	H6F25AA
	HP USB Travel Mouse	G1K28AA
	HP Stylish Wireless KB/Mouse	H4B79AA
<b>Adapters</b>	USB Graphics Adapter	NL571AA/AT
	HP DisplayPort to HDMI 1.4 Adapter	F3W43AA
	HP DisplayPort to DVI Adapter	F7W96AA
	HP DisplayPort to VGA Adapter	F7W97AA
	HP Wireless Display Adapter	J1V25AA#xxx
	HP ElitePad HDMI/VGA Adapter	H3N45AA
	HP ElitePad 4.5mm AC Adapter	K0V97AA
<b>Keyboards</b>	HP Elite x21011 G1 PowerKeyboard	L0U13AA#xxx
	HP Elite x21011 G1 Travel Keyboard	K6B54AA#xxx
<b>Cables</b>	HP Elitepad Ethernet Cable	H3N49AA
	HP ElitePad Serial Cable	H3N50AA
<b>Power Adapters</b>	HP 45W Smart AC Adapter (4.5mm) (PL MP only)	H6Y88AA#xxx
	HP 65W Smart AC Adapter (4.5mm)	H6Y89AA#xxx
	HP 65W Slim AC Adapter	H6Y82AA#xxx
	HP 65W Smart Travel AC Adapter	J0E43AA#xxx
<b>Security</b>	HP UltraSlim Keyed Cable Lock	H4D73AA
<b>Storage</b>	HP External USB Optical Drive	F2B56AA
<b>Monitors</b>	HP EliteDisplay E221c 21.5-in Webcam Monitor	D9E49AA
	HP EliteDisplay S231d 23-inch LED Backlit Monitor	F3J72AA
	HP EliteDisplay S240ml 23.8-in MHL Monitor	F4M47AA

### Summary of Changes

Date	Version History	Action	Description of Change
February 23, 2015	v1 to v2	Updated	External display section and added Environmental information
March 9, 2015	V2 to v3	Changed	Memory speed units on page 7

Copyright © 2015 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core and vPro are trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Microsoft and Windows are U.S. registered trademarks of the Microsoft group of companies. . Adobe is a trademark of Adobe Systems Incorporated. ENERGY STAR is a registered mark owned by the U.S. government. For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Studio Sound is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved.

Qualcomm and Gobi are trademarks of Qualcomm Incorporated, registered in the United States and other countries. Trademarks of Qualcomm Incorporated are used with permission.