



**SitePro™**



# 2015 CATALOG

SURVEYOR & CONTRACTORS' TOOLS AND ACCESSORIES



# 2015 New Products



**01-ALC20-B**  
page 22

**01-FGC20-B**  
page 20



**01-FGH20ELAZ**  
page 21

**01-FGC20ELAZ**  
page 21



**01-TFG2**  
page 23

**27-RD202**  
page 7



**25-SK32X**  
page 9



**10-5198**  
page 17



**11-751**  
page 9




**Masonry Nails**  
page 31

**21-PC50**  
page 31



**Orange Surveyors Vest**  
page 26

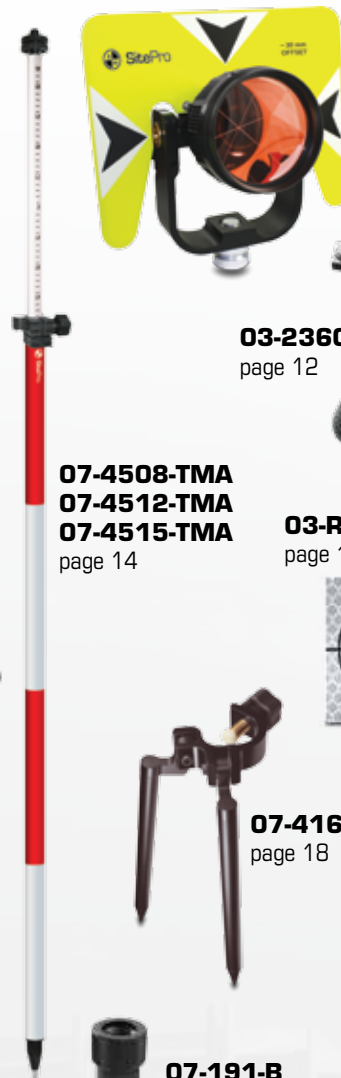

**03-1010-FC**  
page 10

**03-2360**  
page 12

**03-RTXXMM**  
page 12



**07-4160**  
page 18

**11-SPR13-T**  
**11-SPR16-T**  
**11-SPR25-T**  
page 24



**07-191-B**  
page 17



**17-223**  
page 27

**05-3511K**  
**with New Hard Case**  
page 12



**07-1460**  
page 18

**Surveyor & Contractors' Tools and Accessories**



**Dave White's SitePro** is committed to offering quality accessory products for surveying and construction instruments. Integrated with experience from the surveying and construction industry.

SitePro products are sold through a network of dealers and distributors and also as private-labeled products. Please contact us with any questions or suggestions.



## **Dave White's SitePro Guarantee** Limited Warranty Program

SitePro warrants all laser and optical instruments to the original purchaser for a period of two (2) years from date of purchase against any defects in material or workmanship. This warranty does not cover part failure due to normal wear or tool abuse. For more details of warranty coverage and warranty repair information, call (855) 354-9881. This warranty does not apply to accessories items or damage caused where repairs have been made or attempted by person other than SitePro or authorized service center. This warranty gives you specific legal rights and you may have other rights which vary in certain states or provinces.

This Limited Warranty does not apply to accessory items such as tripods, rods, poles, prisms, hand levels, hand tools, safety vests, field supplies, instrument accessories and other related items. These items receive a 90 day limited warranty.

### **SITEPRO WARRANTY COVERAGE FOR OTHER ITEMS.**

SitePro warrants coverage of the laser receivers and digital levels to one (1) year from date of purchase.

### **ORDERS AND SHIPMENTS**

fax: (765) 581-4098  
phone: (765) 581-581-4097  
email: [customerservice@sitepro.us.com](mailto:customerservice@sitepro.us.com)

LASER TOOLS	4
BOX LEVELS	7
OPTICAL INSTRUMENTS	8
PRISMS	10
TRIBRACHS	13
PRISM/GPS POLES	14
GNSS ACCESSORIES	17
BIPODS	18
TRIPODS	19
LEVELING RODS	24
SAFETY VEST	26
HAND TOOLS	27
MEASURING TAPES	28
HAND LEVELS	29
FIELD SUPPLIES	29

SitePro laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

**2M**

Laser radiation. Do not stare into the beam or view directly with optical instrument.



**3R**

Laser radiation. Do not stare into the beam or view directly with optical instrument.

## SLR300H HORIZONTAL ROTARY LASER

- ▶ Leveling accuracy up to 1/8-in at 100-ft (3mm at 30m) with working range up to 1000-ft (300m) diameter
- ▶ Self leveling range up to  $\pm 5^\circ$  that can sense and indicate out-of-level conditions
- ▶ Manual Mode allows laser to tilt for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been moved
- ▶ Dual Manual grade matching up to 8.77% in both axes
- ▶ Enclosed rotor housing keeps laser safe from the elements or tough jobsite conditions

Technical Data	27-SLR300H
Accuracy @ 100-ft (30m)	1/8-in (3mm)
Range with Detector (Diameter)	1000-ft (305m)
Interior Range (Diameter)	n/a
Leveling Type (Degrees)	Electronic ( $\pm 5^\circ$ )
Beam Rating	Class 2M, 650nm
Slope/Grade Capability	Dual ( $\pm 8.77\%$ )
Battery Type	4-C Cell
Water/Dust Protection	IP55
Package Contents	Rotary Laser, RD200 Laser Detector w/Clamp, Carrying Case, Batteries, User Manual



# Performance and Accuracy

## SLR202GR DUAL DIAL-IN GRADE ROTARY LASER

The SLR202GR features dual dial-in grade ( $\pm 10.0\%$ ) with horizontal and vertical electronic self-leveling laser for precise leveling applications, ideal for both indoor and outdoor use. Vertical laydown positioning provides vertical alignment capabilities and squaring to ensure that walls or partitions are precisely aligned.

- ▶ Manual Mode allows laser to tilted for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been disturbed or drifts
- ▶ Variable rotation speeds for a wide variety of jobsite visibility settings: 0, 60, 120, 300 and 600RPM
- ▶ Scan Angles:  $10^\circ$ ,  $45^\circ$ ,  $90^\circ$ ,  $180^\circ$ ; for maximum visibility
- ▶ Visible 90-degree layout beams (both up and down plumb) for alignment and squaring to ensure that walls or partitions are precisely aligned
- ▶ Clock-wise and counter-clock-wise beam positioning
- ▶ Enclosed Rotor Housing keeps laser safe from tough jobsite conditions
- ▶ Real-time remote control with LCD, adjusts instrument with range up to 65-ft (20m)

Technical Data	27-SLR202GR
Accuracy @ 100-ft (30m)	1/8-in (3mm)
Range with Detector (Diameter)	1600-ft (500m)
Interior Range (Diameter)	n/a
Leveling Type (Degrees)	Electronic ( $\pm 5^\circ$ )
Beam Rating	Class 3R, 635nm
Vertical Self-Leveling @ 100-ft (30m)	n/a
Grade Capability	Dual ( $\pm 10.0\%$ )
Battery Type	DC 4.8-6V NiMH Battery Pack or (4) C Cell Alkaline
Water/Dust Protection	IP55
Package Contents	Rotary Laser, RD202 Laser Detector w/Clamp, Rechargeable NiMH Battery Pack, Alkaline Battery Pack, Remote, Target, Glasses Carrying Case, User Manual



**Real-Time  
Remote Control**

**UPGRADED**  
with NEW RD202 Detector



## SLR200H HORIZONTAL ROTARY LASER

- ▶ Horizontal self-leveling for precise outdoor leveling applications
- ▶ Leveling accuracy up to 1/8-in at 100-ft (3mm at 30m) with working range up to 1600-ft (500m) diameter
- ▶ Self leveling range up to  $\pm 5^\circ$  that can sense and indicate out-of-level conditions
- ▶ Manual Mode allows laser to tilt for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been moved
- ▶ Variable rotation speeds for a wide variety of jobsite visibility settings: 0, 60, 300 and 600RPM
- ▶ Dual Manual grade matching up to 10.00% in both axes
- ▶ Enclosed rotor housing keeps laser safe from the elements or tough jobsite conditions



## SLR200HV HORIZONTAL & VERTICAL ROTARY LASER

The SLR200HV features horizontal and vertical electronic self-leveling laser for precise leveling applications, ideal for both indoor and outdoor use. Vertical laydown positioning provides vertical alignment capabilities and squaring to ensure that walls or partitions are precisely aligned.

- ▶ Manual Mode allows laser to tilted for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been disturbed
- ▶ Variable rotation speeds for a wide variety of jobsite visibility settings: 0, 60, 300 and 600RPM
- ▶ Scan Angles:  $10^\circ$ ,  $45^\circ$ ,  $90^\circ$ ,  $180^\circ$ ; for maximum visibility
- ▶ Visible 90-degree layout beams (both up and down plumb) for alignment and squaring to ensure that walls or partitions are precisely aligned
- ▶ Clock-wise and counter-clock-wise beam positioning
- ▶ Enclosed Rotor Housing keeps laser safe from tough jobsite conditions
- ▶ Windy Mode Feature allows laser to level at jobsites with high winds or vibrations



## SLR200HV-G GREEN BEAM HORIZONTAL & VERTICAL ROTARY LASER

The green beam laser of the SLR200HV-G is 400% brighter than red beams, ideal for indoor construction. Horizontal and vertical electronic self-leveling laser for precise leveling applications. Has all the features of the SLR200HV.

Technical Data	27-SLR200H	27-SLR200HV	27-SLR200HV-G
Horizontal Accuracy @ 100-ft (30m)	1/8-in (3mm)	1/8-in (3mm)	1/8-in (3mm)
Range with Detector (Diameter)	1600-ft (500m)	1600-ft (500m)	1000-ft (305m)
Interior Range (Diameter)	n/a	320-ft (98m)	650-ft (198m)
Leveling Type (Degrees)	Electronic ( $\pm 5^\circ$ )	Electronic ( $\pm 5^\circ$ )	Electronic ( $\pm 5^\circ$ )
Beam Rating	Class 2M, 650nm	Class 3R, 635nm	Class 3R, 525nm
Vertical Self-Leveling @ 100-ft (30m)	n/a	1/8-in (3mm)	1/8-in (3mm)
Slope/Grade Capability	Dual ( $\pm 10.00\%$ )	Dual ( $\pm 10.00\%$ )	Dual ( $\pm 10.00\%$ )
Battery Type	4-C Cell	4-C Cell, NiMH Rechargeable	4-C Cell, NiMH Rechargeable
Water/Dust Protection	IP55	IP55	IP55
Package Contents:	Rotary Laser, RD200 Laser Detector w/ Clamp, Batteries, Carrying Case, User Manual	Rotary Laser, RC28 Remote, Glasses, Magnetic Target, Multi-Mount, RD200 Laser Detector w/Clamp, NiMH Rechargeable Battery Pack, Carrying Case, User Manual	Rotary Laser, RC28 Remote, Glasses, Magnetic Target, Multi-Mount, RD200-G Laser Detector w/Clamp, NiMH Rechargeable Battery Pack, Carrying Case, User Manual

## LL2P LINE LAYOUT LASER

Vertical, horizontal & cross laser line modes: projects two lines independently or together for a wide range of level and/or plumb applications.

- ▶ Tilt "manual mode" cross line – ideal for tilting laser cross lines manually at any angle
- ▶ Robust over-molded housing
- ▶ Detector mode allows laser to be used in bright light conditions with optional line laser detector (use with optional LLD20 laser receiver)
- ▶ Adapter and support base with strong magnets, 1/4-20 and 5/8-11 thread, slots for screws or nails, raceways for optional straps
- ▶ Easy access battery compartment

Technical Data	27-LL2P
Horizontal Line Accuracy:	1/8-in at 30-ft (3mm @ 10m)
Vertical Line Accuracy:	3/16-in at 30-ft (2.5mm @ 10m)
Range:	65-ft (20m)
Range with Detector (Optional):	165-ft (50m)
Leveling Type:	Self-Leveling ( $\pm 4^\circ$ )
Beam Rating:	Class 2M, 635nm
Power Supply	Three (3) AA cell alkaline provide approx. >8hrs of continuous use
Package Contents	Laser Level, Target, Magnetic Adapter, 360-Degree Support Base, Batteries, Carrying Case, User Manual



## LASER TOOL ACCESSORIES

### 27-RC25 REMOTE

- ▶ Remote controls for SLR200H rotary laser
- ▶ Working range up to 100-ft (30m)
- ▶ Batteries: 2- AA alkaline


### 27-RC28 REMOTE

- ▶ Remote controls for SLR200HV and SLR200HV-G rotary laser
- ▶ Working range up to 100-ft (30m)
- ▶ Batteries: 2- AA alkaline

### LASER TARGET

- ▶ Enhances laser visibility
- ▶ Magnetic base for attachment to drop ceilings or metal studs
- ▶ Graduations - inch/cm

Item	Used for
<b>27-TARGET-R</b>	Red Beam Lasers
<b>27-TARGET-G</b>	Green Beam Lasers

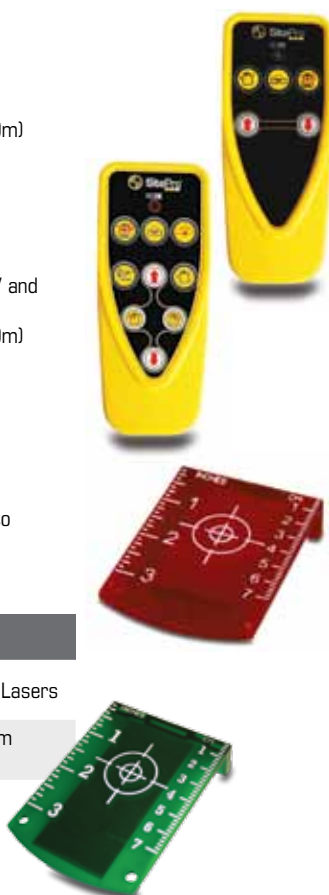

### LASER GLASSES

- ▶ Improves visibility of laser beams under bright conditions or over distances
- ▶ One size fits all

Item	Used for
<b>27-GLASSES-R</b>	Red Beam Lasers
<b>27-GLASSES-G</b>	Green Beam Lasers



### 27-LLD20 LINE LASER RECEIVER

- ▶ Range up to 165-ft (50m) with LL2P
- ▶ Front & back LED display
- ▶ Built-in leveling bubble vial
- ▶ Battery: 9V alkaline



### 27-MT4 MULTI-MOUNT

- ▶ Mounts rotary laser to surfaces for applications such as drop ceilings, remodeling, and masonry
- ▶ 5/8-11 thread mounting stud to mount rotary laser vert. on tripod.
- ▶ Graduations - inch/cm



## ROTARY LASER RECIEVERS

### RD200 SERIES ROTARY LASER DETECTOR

- ▶ Locate rotary laser beam in bright light or over long distances; working range dependent on rotary laser range
- ▶ Rugged housing and gasket sealed for water and dust protection (IP56).
- ▶ Built-in leveling bubble vial
- ▶ Automatic shut-off turns off receiver after seven (7) minutes of inactivity to preserve battery life
- ▶ Includes rod clamp, 9v battery

### RD202 ROTARY LASER DETECTOR

- ▶ Large 5" capture window - quickly locate rotary laser beam in bright light or over long distances; working range dependent on rotary laser range
- ▶ Rugged housing and gasket sealed for water and dust protection (IP56).
- ▶ Heavy duty built-in magnets on both side and top for added versatility when mounting detector
- ▶ Automatic shut-off turns off receiver after seven (7) minutes of inactivity to preserve battery life
- ▶ LED indicators on front for fast visual detection
- ▶ Includes rod clamp, 9v battery



Technical Data	27-RD200	27-RD200-G	27-RD202
Beam Detection	Red Laser	Green Laser	Red Laser
Capture Window	1.75" (4.4cm)	1.75" (4.4cm)	5.0" (12.7cm)
Speaker Volume	3 Step (LOW / HIGH / OFF)	3 Step (LOW / HIGH / OFF)	3 Step (LOW / HIGH / OFF)
Sensitivity	Fine / Coarse (±1.0mm/±2.5mm)	Fine / Coarse (±1.0mm/±2.5mm)	Fine / Coarse (±1.5mm/±2.5mm)
LCD Display	Front and Back	Front and Back	Front and Back
Weight	0.55 lb (0.25kg)	0.55 lb (0.25kg)	0.85 lb (0.39kg)

## DIGITAL BOX LEVELS

### DL24 / DL48 DIGITAL LEVEL

- ▶ Precise digital measuring in degrees, percent, or inches/feet
- ▶ Absolute and relative angle measurement
- ▶ Range of display is between 0° and 90°
- ▶ LED back-lit display with audible sound
- ▶ Rugged with aluminum construction
- ▶ Hold/lock measurement feature
- ▶ Horizontal and vertical measuring accuracy of ±0.1°



29-DL24



29-DL48

**LED back-lit display** with audible sound. Display readout rotates when measuring overhead.



Technical Data	29-DL24	29-DL48
Length (Approx.)	24" (62cm)	48" (120cm)
Measuring Range	0-360° (4 x 90°)	
Measuring Accuracy	0° and 90°, ±0.1°; -1° to 89°, ±0.2°	
Weight	1.34 lb (610g)	2.65 lb (1200g)
Dimensions	23.7" x 2.6" x 1.2" (62 x 6.6 x 3 cm)	47.3" x 2.6" x 1.2" (120 x 6.6 x 3 cm)
Includes	Digital Level, AAA Batteries, Carrying Case, User Manual	Digital Level, AAA Batteries, Carrying Case, User Manual

**Soft Case Included**





## SKT05/SKT05L 5-SEC. DIGITAL THEODOLITE

- ▶ Superior optics with 5" precise vertical and horizontal accuracy and readout
- ▶ Advanced absolute encoder system enhances measuring reliability
- ▶ Easy-to-read dual LCD back-lit displays
- ▶ Automatic power shut-off
- ▶ Easy access battery compartment
- ▶ Water resistant, sealed construction

Technical Data	26-SKT05	26-SKT05L
Magnification	30X	30X
Resolving Power	3"	3"
Field of View	1°30'	1°30'
Minimum Focus	3.3-ft (1.0m)	3.3-ft (1.0m)
Angular Accuracy	5 Sec.	5 Sec.
Minimum Reading:	1" / 5" switchable	1" / 5" switchable
Minimum Focus:	1.3m or 4.26ft	1.3m or 4.26ft
Stadia Ratio:	1:100	1:100
Tilt Sensor:	Yes, +/- 3'	Yes, +/- 3'
<b>Centering Plummet</b>	<b>Optical</b>	<b>Laser Diode, Class 2M</b>
Package Contents:	Theodolite, Plumb Bob, Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual	Theodolite, Plumb Bob, Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual



26-SKT05L

## DT05 5-SEC. DIGITAL THEODOLITE

- ▶ Incremental encoding detection system with dual digital displays
- ▶ Automatic power shut-off
- ▶ Optical plummet for centering of point
- ▶ Coaxial tangent and clamp screws provide ease of use in sighting and alignment
- ▶ Built-in battery pack can be attached and detached by a single action
- ▶ Water resistant, sealed construction

Technical Data	26-DT05
Magnification	30X
Resolving Power	3.5"
Field of View	1°30'
Minimum Focus	4.27-ft (1.3m)
Angular Accuracy	5 Sec.
Minimum Reading:	1" / 5" switchable
Minimum Focus:	1.3m or 4.26ft
Stadia Ratio:	1:100
Tilt Sensor:	Yes, +/- 3'
Centering Plummet	Optical
Package Contents:	Digital Theodolite/Transit, Sunshade, Tool Kit, Rain Cover, Plumb Bob, Carrying Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual



26-DT05

## DIAGONAL EYEPIECE

- ▶ Use in areas where large buildings or obstacles prevent an ideal working distance between the Theodolite and target object
- ▶ Measure any target long as the distance is at least 4-1/4' (1.3m) between the instrument and target
- ▶ Angles and points can be measured by the telescope in any direction eyepiece
- ▶ Provides an erect image, and 1°-30' angle of view

Item	Description	Used for
<b>26-DTEP</b>	Diagonal Eyepiece	DT05
<b>26-SKTEP</b>	Diagonal Eyepiece	SKT05 and SKT05L



26-DTEP

26-SKTEP



## SK-SERIES PRO AUTOMATIC LEVEL

These autolevels feature excellent magnification with large aperture that allows more light for a sharper image. Finely tuned magnetically dampened compensator levels and stabilizes the line of sight despite fine vibrations providing high precision leveling results.

- Compensator is designed with four suspension wires made of super-high-tensile metal that features minimal thermal expansion coefficient
- Horizontal and vertical cross hairs with 1:100 stadia lines - measures level, alignment & estimates distance
- Fine motion horizontal tangent knobs on left and right sides allow friction braked rotation, endless horizontal drive and precise pointing and angle measurement
- Peep sight to aid in sighting
- Solid leveling metal base with three precision leveling screws provides stability and accuracy in all weather and job site conditions
- 360° Graduated horizontal circle in 1-degree increments for layout applications
- 10/2mm circular bubble vial with 90-degree mirror for accurate and quick set-up



## XC-SERIES CONTRACTORS AUTOMATIC LEVEL

The SitePro XC-Series automatic levels are designed for the contractor that needs optimum range and accuracy. Crisp, clear optics that allow for brighter, sharper images.

- Magnetically dampened, automatic compensator
- Horizontal and vertical cross hairs with 1:100 stadia lines - measures level, alignment & estimates distance
- Fine motion horizontal tangent knobs on left and right sides allow friction braked rotation, endless horizontal drive and precise pointing and angle measurement
- Solid leveling metal base with three precision leveling screws provides stability in all weather and jobsite conditions
- 360° Graduated horizontal circle in 1-degree increments for layout applications
- 8' / 2 mm circular bubble vial with 90-degree mirror for quick and accurate set-up



Technical Data	25-SP24XC	25-SP28XC	25-SK24X	25-SK28X	25-SK32X
Magnification	24X	28X	24X	28X	32X
Leveling Accuracy	1/16-in at 150-ft (1.5mm @ 45m)	1/16-in at 200-ft (1.5mm @ 60m)	1/16-in at 150-ft (1.5mm @ 46m)	1/16-in at 200-ft (1.5mm @ 60m)	1/16-in at 250-ft (1.5mm @ 76m)
Angular Accuracy	1°				
Working Range	300-ft (90m)	350-ft (105m)	300-ft (90m)	350-ft (105m)	400-ft (120m)
Field of View:	1° 30' or 2.6ft@100ft		1° 20'		
Min. Focus Distance	1.64 feet		< 1-ft		
Compensator range	+/-15'				
Comp Setting	±0.5"	±0.4"	±0.3"		
Package Contents	Level, Lens Cover, Plumb Bob, Adjustment Tools, Carrying Case, User Manual				

## TL20X 20-POWER TRANSIT LEVEL

The TL20X transit level is ideal for fast set-up, simple to use for leveling and vertical applications.

- Clamps and tangents bring your instrument quickly on target.
- 15 minute horizontal circle
- 3-screw leveling base with 5/8-11 thread for tripod
- Built-in sunshade with rubber eyepiece

Technical Data	25-TL20X
Magnification	20X
Leveling Accuracy (@ 100-ft)	1/4-in (6mm)
Working Range	200-ft (60m)
Thread Tripod Base	5/8/2011
Package Contents	Transit/Level, Adjustment Tools, Carrying Case, User Manual



## 0/-30MM TILTING SINGLE PRISMS

- ▶ 0/-30mm constant prism system
- ▶ All metal holder and target
- ▶ Weather-proof sealed 2-1/2" (62.5mm) precise prism
- ▶ Aluminum tension adjusting knob
- ▶ Universal with leading manufacturers
- ▶ 5/8-11 bayonet adapter
- ▶ Colors available: Orange, Yellow, Florescent Green

Item	Description	Color
<b>03-1010-CC</b>	Single Prism Assembly, All-Metal, Copper Coated	Orange
<b>03-1010-FC</b>	Single Prism Assembly, All-Metal, Copper Coated	Florescent Green
<b>03-1010-O</b>	Single Prism Assembly, All-Metal	Orange
<b>03-1010-Y</b>	Single Prism Assembly, All-Metal	Yellow

### Stainless Steel Tension Adjusting Knob

<b>03-1011-CC</b>	Prism in Canister Only, Copper Coated	Orange
<b>03-1011-O</b>	Prism in Canister Only, Orange	Orange
<b>03-1011-Y</b>	Prism in Canister Only	Yellow
<b>03-1012-O</b>	Prism Holder & Target Assembly	Orange
<b>03-1012-Y</b>	Prism Holder & Target Assembly	Yellow



03-1010-O



03-1011-CC



21-1010-Y

### HEAVY DUTY PADDED CASE

- ▶ Protects prism during transport and storage
- ▶ Fits all 03-1010 models
- ▶ Size: 9" x 8.5" x 5.5"

## 0/-30MM MINI PRISM SYSTEM

- ▶ 25.4mm diameter prism, black anodized sealed aluminum can.
- ▶ 5/8-11 mounting thread.
- ▶ On-board circular bubble leveling vial
- ▶ Includes: plumb bob prism point, 5/8-11 height extension, carrying case with belt loop

Item	Description	Color
<b>03-1500-O</b>	Mini Prism System, Side On-Board Vial	Orange
<b>03-1500-CC</b>	Mini Prism System, Side On-Board Vial, Copper Coated	Orange
<b>03-1600-CC</b>	Mini Prism System, Centered On-Board Vial, Copper Coated	Orange
<b>03-1600-O</b>	Mini Prism System, Centered On-Board Vial	Orange



03-1500-O

03-1600-CC






## FIXED L-BAR 25MM SETUP PRISM

- ▶ Ideal for surveying locations where a permanent mounting is needed
- ▶ 25mm copper-coated prism which is water and dust proof
- ▶ Assembly made of black anodized aluminum, 10.3mm ID mounting hole

Item	Description	Color	Wgt
<b>03-1700-B</b>	Fixed "L-Bar" Single Set-up Prism with Copper Coated Prism	Black	0.45lb (.020kg)

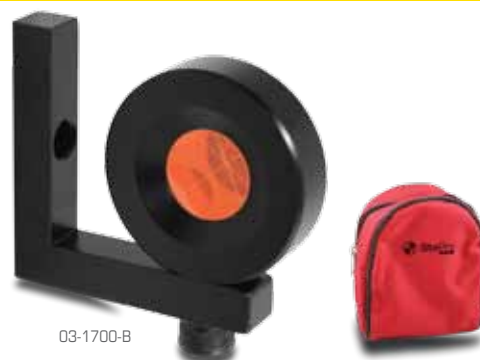

03-1700-B

## SINGLE TILT PRISM SYSTEM, POLYCARBONATE

- ▶ Fully compatible with leading manufacturers such as Sokkia, Trimble, Topcon, etc.
- ▶ Built-in peep sight for easy setup
- ▶ Precision glass up to 2 arc seconds with 0/-30mm offset tilting prism assembly
- ▶ Prism canister and holder/target molded from durable lightweight polycarbonate, with metal yoke
- ▶ Single tilt holder tilts to 360 degrees

Item	Description	Color
<b>03-2010M-O</b>	Single Tilt Prism System, Polycarbonate with Metal Yoke, Includes padded carrying case	Orange
<b>03-2011-O</b>	Prism in Canister Only	Orange
<b>03-2012M-O</b>	Single Tilt Prism Mount Only, Polycarbonate with Metal Yoke	Orange



03-2010M-O

## MINI PRISM STAKEOUT POLE SYSTEM

- ▶ 25mm precise mini prism with 0/-30mm offset tilting aluminum prism and holder.
- ▶ Black anodized sealed aluminum can
- ▶ Two on-board circular bubble vials
- ▶ Four (4) precision machined sectional poles
- ▶ Includes prism system, four (4) sectional poles, point, adjustment tools, and padded carrying case



Item	Description	Color	Wgt
<b>03-1518-R</b>	Mini Prism Stakeout Pole System	Red	1.7 LB (0.77kg)



03-1518-R

## STAKEOUT MINI-PRISM

- ▶ 25mm copper-coated mini prism with 0/-30mm offset tilting prism assembly
- ▶ Top & bottom adjustable bubble vials
- ▶ Includes replaceable point, carrying case

Item	Description	Color	Wgt
<b>03-1520-OC</b>	Stakeout Mini-Prism, Copper Coated	Orange	0.9 lb (0.41kg)



03-1520-OC

## 62MM STROBE PRISM

- ▶ Red LED strobes every two seconds
- ▶ Sealed prism canister with an standard M20 thread
- ▶ Fits all holders designed for screw-in style prisms
- ▶ The battery (camera style) included and provides approximately 48 hours of continuous use

Item	Description	Color
<b>03-4011</b>	62mm Strobe Prism, Screw-in style Includes: Soft case	Orange



03-4011

## 360° REFLECTOR SYSTEMS

- ▶ Compatible with Leica instruments and offsets.
- ▶ Prism assembly is set to precise standards.
- ▶ Ideal for 360° surveying applications
- ▶ 30mm offset, 360° reflector
- ▶ Push button for easy release


Item	Description	Wgt
<b>03-1360</b>	360° Mini Reflector System. Includes 4-section pole set, mount with bubble vial, case	1.7lb (.77kg)



03-1360

## 360° PROFESSIONAL REFLECTOR SYSTEM

- ▶ Compatible with Leica instruments and offsets.
- ▶ Position reflector directly on a survey mark at a height of 78mm
- ▶ Target tracking range up to 2000-ft (600m).

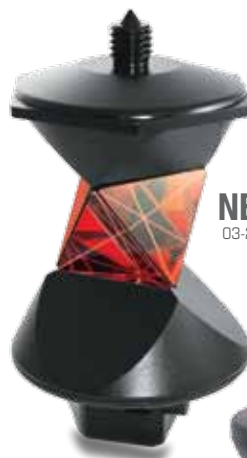

**NEW**  
03-2360

Item	Description	Wgt
<b>03-2360</b>	360° Professional Reflector System. Includes: Prism Pole Adapter, Carrying Case	1.25 lb (0.6kg)

## 360° ROBOTIC PRISM SYSTEM

- ▶ Precision 360° robotic prisms ensure tracking lock with robotic instruments is quick
- ▶ Seven 25.4mm prisms
- ▶ 0mm offset
- ▶ Includes height adapter system with 5/8-11 thread

Item	Description	Wgt
<b>03-3600</b>	360° Robotic Prism System	1.11 lb (0.5kg)




03-3600

## TARGETS

### REFLECTIVE RETRO TARGET

- ▶ Ideal for monitoring work where you have to leave targets in position over long periods of time.
- ▶ These self adhesive reflective targets can easily be seen in daylight.
- ▶ Available in five (5) different sizes

Item	Description	Size
<b>03-RT60MM</b>	60mm Reflective Retro Target	60 mm x 60 mm
<b>03-RT50MM</b>	50mm Reflective Retro Target	50 mm x 50 mm
<b>03-RT40MM</b>	40mm Reflective Retro Target	40 mm x 40 mm
<b>03-RT30MM</b>	30mm Reflective Retro Target	30 mm x 30 mm
<b>03-RT20MM</b>	20mm Reflective Retro Target	20 mm x 20 mm

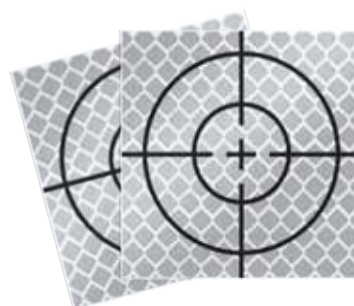



## PRECISION TRIBRACHS

- ▶ Smooth locking mechanism with secure motion foot screws
- ▶ Precise alignment of support cavity to the base plate assures accurate centering of instrument
- ▶ Durable to endure most weather conditions



Item	Style	Plummet	Wgt
<b>05-1200-B</b>	Swiss Style, Black	Optical- 0.5-15m focus	1.85 lb (.84 kg)
<b>05-1200-GN</b>	Swiss Style, Green	Optical- 0.5-15m focus	1.85 lb (.84 kg)
<b>05-1200-GY</b>	Swiss Style, Grey	Optical- 0.5-15m focus	1.85 lb (.84 kg)
<b>05-1200-Y</b>	Swiss Style, Yellow	Optical- 0.5-15m focus	1.85 lb (.84 kg)
<b>05-1300-B</b>	Swiss Style, Black	Laser- 0.5-15m focus	2.2 lb (.99 kg)
<b>05-1400-GY</b>	Japanese Style, Grey	Optical- 0.5-15m focus	1.85 lb (.84 kg)

## HEAVY DUTY PADDED CASE

- ▶ Protect tribrach during transport and storage
- ▶ Fits all 05-1200 models
- ▶ Size: 9" x 8.5" x 5.5"
- ▶ Available separately.



## TRIBRACH ADAPTERS

- ▶ Anodized black aluminum
- ▶ 5/8-11 brass thread mounting
- ▶ Anodized aluminum mounting studs

Item	Style
<b>05-2520</b>	Fixed Tribrach Adapter, 5/8-11 female thread
<b>05-2521</b>	Friction Type Rotating Tribrach Adapter
<b>05-2525</b>	Zeiss/Wild Type Rotating Tribrach Adapter, Adjustable



## TRAVERSE ADAPTER SYSTEMS

- ▶ For precise setups and traversing applications
- ▶ The 2.5X optical plummet
- ▶ 60-second plate vial, adjustable
- ▶ Precision-machined axis rotates 360°
- ▶ Compatible with all prisms with a 24.9 mm bayonet base
- ▶ Adjustable height: 100 mm-to-120 mm
- ▶ Traverse tribrach adapter fits all standard three-prong tribrachs
- ▶ The over point accuracy is 0.5 mm at 1.5 m



**NEW**  
05-3500

## PADDED HARD CASE

- ▶ Protect instruments during transport and storage
- ▶ Carries your traverse kit
- ▶ Included with 05-2511K



Item	Style
<b>05-3511K</b>	Traverse Kit - Includes 05-3511 Tribrach Adapter, 05-1201 Tribrach, 03-1010-O Prism System, Padded Hard Case
<b>05-3511</b>	Traverse Tribrach Adapter with Optical Plummet
<b>05-1201-B</b>	Tribrach without Optical Plummet, Black
<b>21-3500</b>	Padded Hard Case, for Traverse Kit



## TWIST LOCK ALUMINUM PRISM POLES

- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Twist lock system with built-in 20-minute precise level vial
- ▶ The soft rubber knob is easy to tighten and loosen
- ▶ Easily visible precise level vial
- ▶ Anodized dual-graduation marks (inner pole)

Item	Length	Color	Wgt	Mounting Type	Sections
<b>07-4705-TMA-FY</b>	5.10' (1.55m)	Fluorescent	2.8 lb (1.29 kg)	5/8-11, Adj. H.I.	3
<b>07-4708-TMA</b>	8' (2.5m)	Red/White	3.1 lb (1.4kg)	5/8-11, Adj. H.I.	2
<b>07-4708-TMA-FY</b>	8' (2.5m)	Fluorescent	3.1 lb (1.4kg)	5/8-11, Adj. H.I.	2
<b>07-4712-TMA</b>	12' (3.7m)	Red/White	4.1 lb (1.85kg)	5/8-11, Adj. H.I.	3
<b>07-4712-TMA-FY</b>	12' (3.7m)	Fluorescent	4.1 lb (1.85kg)	5/8-11, Adj. H.I.	3
<b>07-4715-TMA</b>	15' (4.6m)	Red/White	6.2 lb (2.79kg)	5/8-11, Adj. H.I.	4
<b>07-4715-TMA-FY</b>	15' (4.6m)	Fluorescent	6.2 lb (2.79kg)	5/8-11, Adj. H.I.	4

NEW



## TWIST LOCK COMPOSITE PRISM POLES

- ▶ Lightweight non-conductive fiberglass prism pole
- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Twist lock system with built-in 20-minute precise level vial
- ▶ The soft rubber knob is easy to tighten and loosen
- ▶ Anodized dual-graduation marks on inner pole

Item	Length	Color	Wgt	Mounting Type	Sections
<b>07-4108-TMA</b>	8' (2.4m)	Red/White	2.0 lb (0.9kg)	5/8-11, Adj. H.I.	2
<b>07-4112-TMA</b>	12' (3.6M)	Red/White	3.1 lb (1.4kg)	5/8-11, Adj. H.I.	3
<b>07-4115-TMA</b>	15' (4.6m)	Red/White	4.2 lb (1.9kg)	5/8-11, Adj. H.I.	4



## TWIST LOCK ULTRALITE PRISM POLES

- ▶ Lightweight carbon fiber prism pole with inner aluminum pole
- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Twist lock system with built-in 20-minute precise level vial
- ▶ The soft rubber knob is easy to tighten and loosen
- ▶ Easily visible precise level vial
- ▶ Anodized dual-graduation marks

Item	Length	Color	Wgt	Mounting Type	Sections
<b>07-4608-TMA</b>	8' (2.5m)	Black	3.6 lb (1.63kg)	5/8-11, Adj. H.I.	2



## COMPRESSION LOCK PRISM POLES

- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Compression lock system is constructed of brass/aluminum and provides a quick positive hold on extension pole
- ▶ Easily visible precise 20-minute level vial
- ▶ Anodized dual-graduation marks

Item	Length	Color	Wgt	Mounting Type	Sections
<b>07-4208-TMA</b>	8' (2.5m)	Red/White	2.1 lb (0.95kg)	5/8-11, Adj. H.I.	2
<b>07-4215-TMA</b>	15' (4.6m)	Red/White	3.8 lb (1.72kg)	5/8-11, Adj. H.I.	4

## UPGRADE

All Poles now with 20-min vials





## MINI STAKEOUT POLE, 1.28 FT ALUMINUM

The SitePro mini stakeout pole is only 1.28 ft tall with a 5/8-11 thread fixed tip for prism mounting.

- ▶ Built-in 20-minute precise level vial
- ▶ Mostly used with a Mini Prism System
- ▶ Can be used as a pole extension, 1-1/4" outside diameter.
- ▶ Includes prism pole point

Item	Length	Material	Wgt	Mounting
<b>07-4001-FY</b>	1.28' (0.39m)	Aluminum	1.5 lb (0.68kg)	5/8-11, Fixed

## 4.7" MINI HANDHELD ROD

The SitePro mini handheld rod features a 5/8-11 threaded stud with adjustable bubble vial. Use with any prism system that fits the 5/8-11 male thread.

- ▶ Height of 4.7" (120 mm)
- ▶ built-in adjustable 20-min circular bubble vial
- ▶ Removable tip

Item	Length	Material	Wgt	Mounting
<b>07-4047</b>	4.7" (120mm)	Aluminum	0.4 lb (0.18kg)	5/8-11, Fixed

## 2M TWO-PIECE GNSS ROVER ROD

- ▶ Lightweight 2 section pole
- ▶ Carbon fiber or aluminum model
- ▶ Fixed height at two (2) meters
- ▶ On-board 20-minute, adjustable circular vial
- ▶ Easy soft-grip

Item	Length	Material	Mounting	Wgt	Sections
<b>09-2002-M</b>	Fixed 2.0m (7.22 ft)	Carbon fiber, Black	5/8-11, Fixed	1.76 lb (0.80kg)	2
<b>09-2102-M</b>	Fixed 2.0m (7.22 ft.)	Aluminum, Yellow	5/8-11, Fixed	4.0 lb (1.81kg)	2

## 3.6M ALUMINUM RANGE POLE

- ▶ Lightweight aluminum, 3-section with steel point
- ▶ Electrostatically powder-coated white and red
- ▶ 5/8-11 female thread
- ▶ Includes carrying case

Item	Length	Color	Locking	Wgt	Mounting Type	Sections
<b>09-3812</b>	Fixed, 3.6m (12 ft)	Aluminum	5/8-11	3.4 lb (1.54kg)	5/8-11, Adj. H.I.	3

## 3.6M COMPOSITE RANGE POLE


- ▶ Lightweight non-conductive fiberglass, 3-section with point (with rubber boot)
- ▶ Sections are 4-ft in length with alternate white and red striping
- ▶ 1-1/4" (32mm) diameter tubes with 5/8-11 male and female thread metal inserts

Item	Length	Color	Locking	Wgt	Mounting Type	Sections
<b>09-3912</b>	Fixed, 3.6m (12 ft)	Red/White	5/18-11	2.0 lb (0.91kg)	5/8-11, Adj. H.I.	3

## HEADS UP ROD LEVEL

- ▶ Easy to read 40-min bubble vial with mirror for accurate and quick setup
- ▶ Twist lock knob for clamping to rod

Item	Description	Vial
<b>11-751</b>	Heads Up Rod Level	40 min.

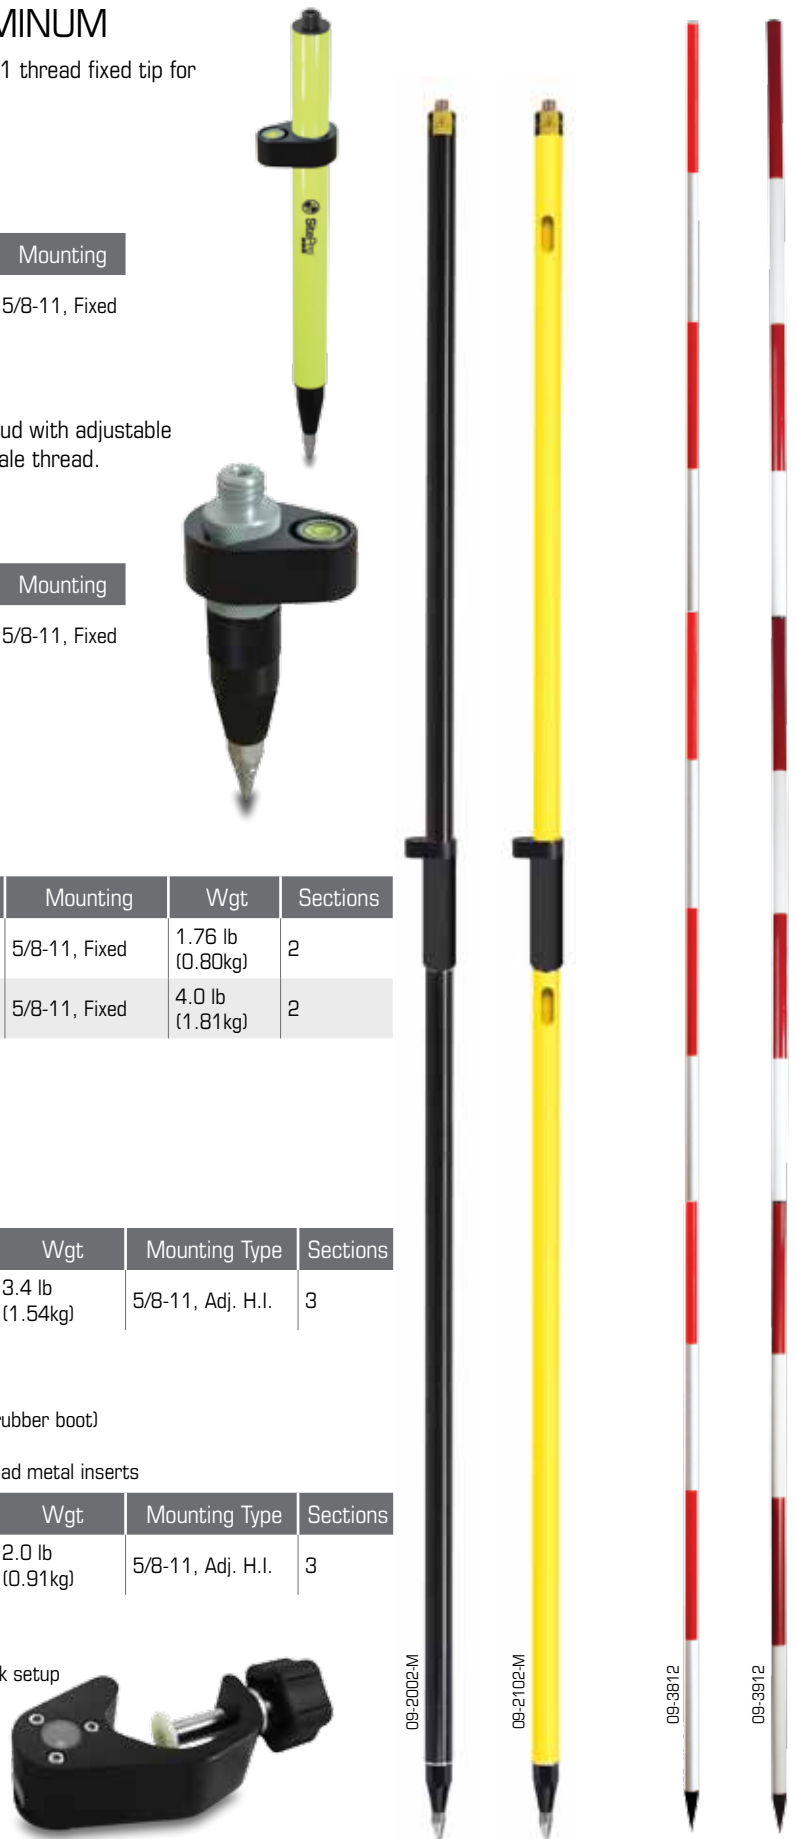

## UPGRADE

All Rods now with 20-min vials



09-2122-GM

09-2222-M

09-2222-GT

09-2322-GT

09-2708-TM

\*All SitePro Poles and Rods Include Soft Carrying Case

## 2M SNAP-LOC ROVER ROD



- ▶ Lightweight telescoping 2-section pole
- ▶ Snap-loc for no slip with compression lock
- ▶ On-board 20-minute, adjustable circular vial

Item	Length	Heights	Material	Grads	Wgt	Sec
<b>09-2022-M</b>	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Carbon Fiber, Black	-	2.4 lb (1.09kg)	2
<b>09-2122-M</b>	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Aluminum, Yellow	-	2.4 lb (1.09kg)	2
<b>09-2122-GT</b>	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Aluminum, Fluorescent	10ths 100ths	2.4 lb (1.09kg)	2
<b>09-2122-GM</b>	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Aluminum, Fluorescent	metric	2.4 lb (1.09kg)	2

## 3-POSITION CARBON FIBER GPS ROVER ROD, SNAP-LOC



- ▶ Lightweight telescoping carbon fiber pole
- ▶ Snap-loc for no slip with compression lock - 3 heights: 2m, 1.8m or 1.6m and collapses to 1.343m
- ▶ On-board 20-minute, adjustable circular vial

Item	Length	Heights	Material	Grads	Wgt	Sec
<b>09-2222-M</b>	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Carbon fiber	-	1.9 lb (0.84kg)	2
<b>09-2222-GT</b>	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Carbon fiber	10ths 100ths	1.9 lb (0.84kg)	2
<b>09-2222-GM</b>	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Carbon fiber	metric	1.9 lb (0.84kg)	2

## 3-POSITION ALUMINUM GPS ROVER ROD, SNAP-LOC



- ▶ All-aluminum telescoping pole
- ▶ Snap-loc for no slip with compression lock - 3 heights: 2m, 1.8m or 1.6m and collapses to 1.34m
- ▶ On-board 20-minute, adjustable circular vial

Item	Length	Heights	Material	Grads	Wgt	Sec
<b>09-2322-GM</b>	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Aluminum	Metric	2.2 lb (0.99kg)	2
<b>09-2322-GT</b>	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Aluminum	10ths 100ths	2.2 lb (0.99kg)	2

## 2.4M CARBON FIBER TWIST-LOCK ROBOTICS POLE



- ▶ Lightweight telescoping carbon fiber pole with dual graduations imprinted on inner - 10ths/100ths
- ▶ Twist locking system with stainless steel locking pin for fixed length positioning
- ▶ On-board 20-minute, adjustable circular vial

Item	Extended Length	Heights	Material	Grads	Wgt	Sec
<b>09-2708-TM</b>	2.4m (7.87 ft) -GPS 2.5m (8.20 ft)- Prism	1.8m, 2m, 2.2m, 2.4m (5.9 ft, 6.56 ft, 7.22 ft, 7.87 ft)	Carbon fiber, Aluminum	10ths 100ths	2.2 lb (1.0 kg)	2



10-5215


## QUICK RELEASE SUREGRIP™ CLAMPS

- ▶ Easily clamps to pole with special design to prevent overtightening the pole clamp screw.
- ▶ Clamping feature is limited to prevent overtightening on pole
- ▶ Ideal for RTK and GNSS surveys requiring a pole and a data collector.
- ▶ Made of anodized aluminum for durability and performance.
- ▶ Designed to fit a pole diameter of 1.25-in (32mm).
- ▶ Compatible with most popular quick-release cradles to hold data controllers.

Item	Description	Fits Pole	Wgt
<b>10-5215</b>	Sure-Grip Quick-Release Pole Clamp	1.25-in (32mm)	2 lb (.91kg)
<b>10-5215X</b>	Sure-Grip Quick-Release Pole Clamp with Vial and Compass	1.25-in (32mm)	3 lb (1.36kg)



10-5215X



10-5198

## OPEN CLAMP BRACKETS

Item	Description	Fits Pole	Wgt
<b>10-5198</b>	5198 Open Clamp Pole Bracket, with 0.15 x 0.92" Slot	1.25-in (32mm)	0.4 lb (.18kg)

## QUICK RELEASE SUREGRIP™ CRADLES

- ▶ Easily secures data collector/controller with anti-crush quick release design that locks cradle when tightened
- ▶ Plugs directly into quick-release pole clamps
- ▶ Durable anodized aluminum design

Item	Description	Designed to fit	Wgt
<b>10-5250</b>	5250 Sure-Grip Cradle for Data Collector/Controller	TSC 2™, Ranger™ 300X, 500X	0.42 (0.19kg)
<b>10-5252</b>	5252 Sure-Grip Cradle for Data Collector/Controller	Allegro, JETT•ce, Explorer, Tporacker, FC-2200	0.42 (0.19kg)
<b>10-5254</b>	5254 Sure-Grip Cradle for Data Collector/Controller	FC-100, Mobile Mapper CE/CX, ProMark 3	0.63 (0.29kg)
<b>10-5257</b>	5257 Sure-Grip Cradle for Data Collector/Controller	Archer, Leica DX10, Carlson Mini, Javad Victor	0.50 (0.23kg)
<b>10-5262</b>	5262 Sure-Grip Cradle for Data Collector/ Controller	Carlson Surveyor, Surveyor+	0.43 (0.19kg)
<b>10-5263</b>	5263 Sure-Grip Cradle for Data Collector/Controller	FC-2500	0.41 (0.18kg)
<b>10-5265</b>	5265 Sure-Grip Cradle for Data Collector/Controller	TSC3	0.46 (0.21kg)
<b>10-5269</b>	5269 Sure-Grip Cradle for Data Collector/Controller	FC236/X7, Q/R, GETAC PS236	0.46 (0.21kg)



10-5250

10-5252

10-5254

10-5257



10-5262



10-5263



10-5265



10-5269

## ADAPTER, PRISM

### 07-2080 SNAP-ON TYPE PRISM ADAPTER

- ▶ Adapter for Swiss-style snap-on prisms
- ▶ Mounts to 5/8-11 tribrach adapter or prism pole
- ▶ Weighs 0.06lb (0.03 kg)



### PRISM POLE TOPO SHOE

- ▶ Aluminum body design
- ▶ 5/8-11 female thread
- ▶ Both are 3.37" (85.6mm) in height

Item	Size/Type	Wgt
<b>07-191-A</b>	1" (25.4mm) Standard Base	0.34 lb (0.15kg)
<b>07-191-B</b>	2.5" (64mm) Wide Base	1.26 lb (0.57kg)



07-191-A



07-191-B



## MINI PRISM BIPOD

- ▶ Solid 10" Aluminum legs
- ▶ Includes a universal head that accepts pole diameters of 1" to 1.25"
- ▶ Includes heavy duty bag with carrying strap

**NEW**  
07-4160



Item	Type	Style	Wgt
<b>07-4160</b>	Aluminum	Solid 10" (25cm)	0.8 lb (0.36kg)

## RANGE/PRISM POLE BIPOD

- ▶ Side entry head with clamp for quick and easy pole setup
- ▶ Unique locking system provides non-slip quick clamping
- ▶ Thumb release style allows easy adjustments
- ▶ Fits 1" to 1-1/2" (25mm-38mm) diameter poles

Item	Type	Style	Open	Close	Wgt
<b>07-4360</b>	Aluminum	Thumb Release	71-1/2" (182cm)	42-1/2" (108cm)	4.7 lb (2.13kg)
<b>07-4361</b>	Carbon Fiber	Thumb Release	71-1/2" (182cm)	42-1/2" (108cm)	4.3 lb (1.95kg)

## 07-1460 BIPOD LEG CLIP

- ▶ Attaches to the base of any 1-1/2" inch (38mm) diameter prism or antenna pole
- ▶ Bipod legs snap into the clips making the system convenient for storage and transport



**NEW**  
07-1460

## POLE TRIPOD WITH THUMB RELEASE

- ▶ Tripod creates free-standing setup for GNSS antenna poles or prism poles.
- ▶ Top mount universal head will accommodate 1 to 1.25 inch diameter
- ▶ Feature large, thumb release buttons for quick setup on even or uneven ground.
- ▶ Impact resistant materials, replaceable shoes, and quick release telescoping aluminum legs.
- ▶ Legs extend independently to 6-ft (180 cm)
- ▶ Fine adjustment knob to fine tuning your setup
- ▶ Includes carrying case

Item	Type	Style	Open	Close	Wgt
<b>07-4250</b>	Aluminum	Thumb Release	71" (180 cm)	42-1/2" (108cm)	6.0 lb (2.72kg)

## GPS ANTENNA TRIPOD

- ▶ Ideal for GPS and machine-control applications
- ▶ Heavy duty aluminum with collapseable 2 meter center staff that rotates 360-degrees
- ▶ 3-position center staff with steel locking pin - locking heights of 79", 71", and 59" (2.0m, 1.8m, 1.5m)
- ▶ Electrostatic powder-coated aluminum legs with replaceable points
- ▶ Double leg points creates more grip to maximize stability to prevent chance of twisting, ideal when using angle measuring instruments such as robots
- ▶ Built-in compass with 8 minute vial
- ▶ Removable 5/8-11 thread adapter
- ▶ Large telescoping legs (1.25 to 1.50 inch diameters) feature adjustable handle bolts on the leg pivots creating greater stability
- ▶ Aluminum hardware is anodized black
- ▶ Fluorescent yellow

Item	Type	Center Locking	Open	Close	Wgt
<b>09-100-FY</b>	Twist Lock	79", 71", 59" (2.0m, 1.8m, 1.5m)	79" (201cm)	50" (127cm)	15 lb (6.8kg)




## HVFG SITEMAX™ COMPOSITE DUAL-CLAMP TRIPOD

The SiteMax HVFG is the best value heavy duty fiberglass tripod on the market. Heavy duty dual clamp design add extra stability - both quick clamp and wing screw. Large round head is precision machined to add even more stability for your instrument.

- ▶ Powder coated wear-resistant metal hardware
- ▶ Double banded extension legs and large positive locking quick clamp add stability
- ▶ Replaceable shoe points
- ▶ Ergonomic hand carrying handle
- ▶ Includes: heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

Technical Data	01-HVFG20-DCB	01-HVFG20-DCO
Type	Fiberglass	Fiberglass
Extended	72" (183cm)	72" (183cm)
Collapsed	47" (119cm)	47" (119cm)
Clamping Style	Dual Clamp: Quick & Wing Screw	Dual Clamp: Quick & Wing Screw
Head Style	5/8-11, Large Flat	5/8-11, Large Flat
Net Wt	18lb (8.4kg)	18lb (8.4kg)
Hardware Color	Black	Orange

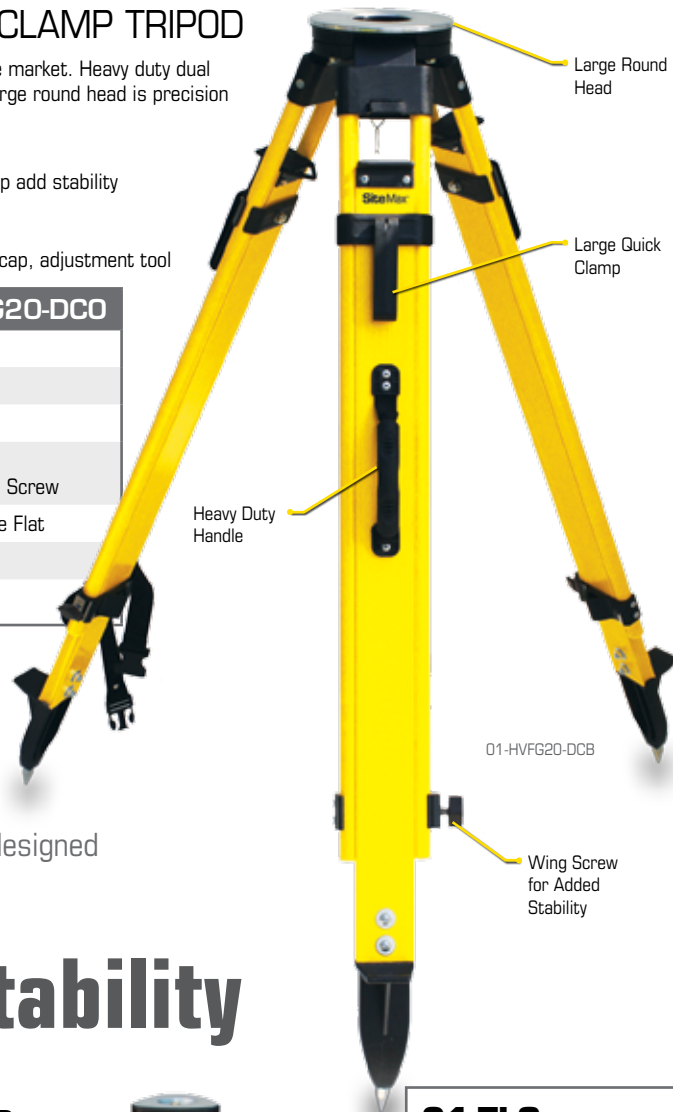

# SiteMax™

SiteMax™ is a SitePro signature product designed and engineered by customer specifications.

## Versatility and Stability

### HVFG SITEMAX™ COMPOSITE TRIPOD, QUICK CLAMP

- ▶ Best value heavy duty fiberglass tripod on the market
- ▶ Powder coated wear-resistant metal hardware
- ▶ Double banded extension legs and large positive locking quick clamp add stability
- ▶ Replaceable shoe points
- ▶ Standard 5/8-11 flat head
- ▶ Ergonomic hand carrying handle
- ▶ Includes: heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

Technical Data	01-HVFG20-B
Type	Fiberglass
Extended	72" (183cm)
Collapsed	47" (119cm)
Clamping Style	Quick Clamp
Head Style	5/8-11, Std Flat
Net Wt	18lb (8.2kg)
Hardware Color	Black



### 01-TLS TRIPOD RETAINER STRAP

- ▶ Used with the 01-HVFG20 series tripod
- ▶ Ensures tripod stays stable and in place



**Stablize** your tripod in place

## FGC20 FIBERGLASS TRIPOD

The FGC20 is a medium weight all-fiberglass tripod with quick clamp design. Precision machined head and leg hinges provide a stable mounting base for your instrument.

- ▶ Powder coated wear-resistant metal hardware
- ▶ Die-cast aluminum shoe with hardened steel replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Technical Data	01-FGC20-B
Type	Fiberglass
Extended	65" (165cm)
Collapsed	40" (102cm)
Clamping Style	Dual Clamp: Quick & Wing Screw
Head Style	5/8-11, FLAT
Net Wt	-
Hardware Color	Black

**NEW**  
01-FGC20-B

## WDF WOOD/FIBERGLASS TRIPOD: QUICK CLAMP

The WDF is the best value heavy duty wood/fiberglass tripod on the market. Combination of hardwood legs with fiberglass dowels provides stability and weather resistance.

- ▶ Double banded extension legs and large positive locking quick clamp add extra stability
- ▶ Powder coated wear-resistant metal hardware
- ▶ Replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Technical Data	01-WDF20-B	01-WDF20-O
Type	Wood/Fiberglass	Wood/Fiberglass
Extended	72" (183cm)	72" (183cm)
Collapsed	42" (107cm)	42" (107cm)
Clamping Style	Quick Clamp	Quick Clamp
Head Style	5/8-11, FLAT	5/8-11, FLAT
Net Wt	16lb (7.2kg)	16lb (7.2kg)
Hardware Color	Black	Orange

01-WDF20-O

## WDF WOOD/FIBERGLASS TRIPOD: DUAL CLAMP

The WDF is the best value heavy duty wood/fiberglass tripod on the market. Heavy duty dual clamp design add extra stability - both quick clamp and wing screw. Large round head is precision machined to add even more stability for your instrument.

- ▶ Combination of hardwood legs with fiberglass dowels provides stability and weather resistance
- ▶ Double banded extension legs and large positive locking quick clamp add extra stability
- ▶ Powder coated wear-resistant metal hardware
- ▶ Replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Technical Data	01-WDF20-DCB
Type	Wood/Fiberglass
Extended	72" (183cm)
Collapsed	42" (107cm)
Clamping Style	Dual Clamp: Quick & Wing Screw
Head Style	5/8-11, FLAT
Net Wt	16lb (7.2kg)
Hardware Color	Black

01-WDF20-DCB



## WDW HEAVY DUTY WOOD TRIPOD, WING SCREW

- ▶ Made of high quality hardwood with wide-frame extension legs and 1" diameter dowels
- ▶ Wing screw style clamp with die cast aluminum hardware for maximum stability
- ▶ Wear-resistant with treated finish and powder coated metal hardware
- ▶ Includes: plastic head cap for protection, heavy-duty poly-webbing shoulder strap

Technical Data	01-WDW20-O
Type	Wood
Extended	72" (183cm)
Collapsed	42" (107cm)
Clamping Style	Wing Screw
Head Style	5/8-11, FLAT
Net Wt	16lb (7.2kg)
Hardware Color	Orange

01-WDW20-O



## FGC20 CONTRACTOR'S ELEVATOR COMPOSITE TRIPOD

The FGC20 elevator contractor's tripod is a medium duty, fiberglass tripod with positive locking quick clamp style clamps.

- ▶ Double banded extension legs and large positive locking quick clamp for extra stability
- ▶ Adjustable center column with height adjustment range of 20" (51 cm) and metal gear & rack system for smooth continuous motion.
- ▶ Precision machined aluminum head and leg hinges provides stable mounting base
- ▶ Die-cast aluminum shoe with hardened steel replaceable shoe points
- ▶ Inner column provides additional 26" (66cm) height adjustment.
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Technical Data	01-FGC20ELAZ-B
Type	Fiberglass
Extended	119" (303cm)
Collapsed	49" (125cm)
Clamping Style	Quick Clamp
Head Style	5/8-11, FLAT
Net Wt	15lb (6.8kg)
Hardware Color	Black

**NEW**

01-FGC20ELAZ-B



## FGH30 HEAVY DUTY ELEVATOR COMPOSITE TRIPOD

The FGH30 elevator tripod is heavy duty with dual clamp design for add extra stability - both positive locking quick clamp and wing screw. Double banded extension legs, struts with lockable leg stabilizer and dual clamps add extra stability

- ▶ Tall adjustable center column with height adjustment range up to 44" (112cm) and metal gear & rack system for smooth continuous motion.
- ▶ Precision machined detachable aluminum round head with a 5/8-11 stud provides GPS antenna a sturdy platform
- ▶ create greater stability
- ▶ Engineered polymer shoes with hardened steel replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Ergonomic hand carrying handle grip with leg strap

Technical Data	01-FGH30ELAZ-B
Type	Fiberglass
Extended	149.6" (380cm)
Collapsed	67" (170cm)
Clamping Style	Dual Clamp: Quick Clamp & Wing Screw
Head Style	5/8-11, FLAT
Net Wt	33.1lb (15.0kg)
Hardware Color	Black

**NEW**

01-FGH30ELAZ-DCB



## ALC CONTRACTORS' ALUMINUM TRIPOD

- ▶ Lightweight, aluminum tripod with positive locking quick clamp style clamps and individually tightened hinge screws
- ▶ Aluminum hinge, clamp and shoe castings with replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Technical Data	O1-ALC20-B
Type	Aluminum
Extended	65" (165cm)
Collapsed	39" (99cm)
Clamping Style	Quick Clamp
Head Style	5/8-11, FLAT
Net Wt	9lb (4.1kg)
Hardware Color	Black



**NEW**  
O1-ALC20-B

## ALW HEAVY DUTY ALUMINUM TRIPOD: WING SCREW

The ALW20 is a heavy duty, aluminum tripod with wing screw clamps

- ▶ Aluminum hinge, clamp and shoe castings with replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Technical Data	O1-ALW20-B
Type	Aluminum
Extended	65" (165cms)
Collapsed	42" (107cm)
Clamping Style	Wing Screw
Head Style	5/8-11, FLAT
Net Wt	10 lb (4.54kg)
Hardware Color	Black



O1-ALW20-B

## ALW HEAVY DUTY ALUMINUM MINI-TRIPOD: WING SCREW

The ALW10 is a heavy duty, aluminum mini tripod with wing screw clamps

- ▶ Aluminum hinge, clamp and shoe castings with replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes carrying strap and adjustment tool

Technical Data	O1-ALW10-B
Type	Aluminum
Extended	28.5" (73cm)
Collapsed	22" (56cm)
Clamping Style	Wing Screw
Head Style	5/8-11, FLAT
Net Wt	6.4 lb (2.9kg)
Hardware Color	Black



O1-ALW10-B

## ALQR HEAVY DUTY ALUMINUM TRIPOD: QUICK RELEASE

The ALQR Series tripods are made of medium weight, heavy gauge aluminum with added stability of double banded legs.

- ▶ Positive locking quick clamps
- ▶ Powder coated wear-resistant metal hardware
- ▶ Replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Technical Data	01-ALQR20-B	01-ALQR20-O	01-ALQR40-B
Type	Aluminum	Aluminum	Aluminum
Extended	64" (163cm)	64" (163cm)	64" (163cm)
Collapsed	40" (102cm)	40" (102cm)	40" (102cm)
Clamping Style	Quick Clamp	Quick Clamp	Quick Clamp
Head Style	5/8-11, FLAT	5/8-11, FLAT	5/8-11, DOME
Net Wt	10lb (4.6kg)	10lb (4.6kg)	10lb (4.6kg)
Hardware Color	Black	Orange	Black

01-ALQR20-B



## ALQR ELEVATOR ALUMINUM TRIPOD: QUICK RELEASE

The ALQR elevator tripod is a medium duty, aluminum tripod with positive locking quick clamp style clamps.

- ▶ Adjustable center column with height adjustment range of 21" (54cm) and metal gear & rack system for smooth continuous motion.
- ▶ Special inner column provides additional 22" (56cm) height adjustment
- ▶ Aluminum shoe with hardened steel replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Technical Data	01-ALQR20-ELAZ
Type	Aluminum
Extended	116" (295cm)
Collapsed	48" (122cm)
Clamping Style	Quick Clamp
Head Style	5/8-11, FLAT
Net Wt	15lb (6.8kg)
Hardware Color	Black



01-ALQR20-ELAZ




## TRIPOD FLOOR GUIDE

- ▶ Ideal when setting up tripod on slick surfaces and concrete floors
- ▶ Makes setting up over a point faster

Technical Data	01-TFG	01-TFG2
Type	Steel	Aluminum
Extended	16" (40cm)	25" (64cm)
Mounting	Slots for points on tripod	Slots for points on tripod with rubber straps
Net Wt	2.25 lb (1.02kg)	1.0 lb (0.45kg)



01-TFG

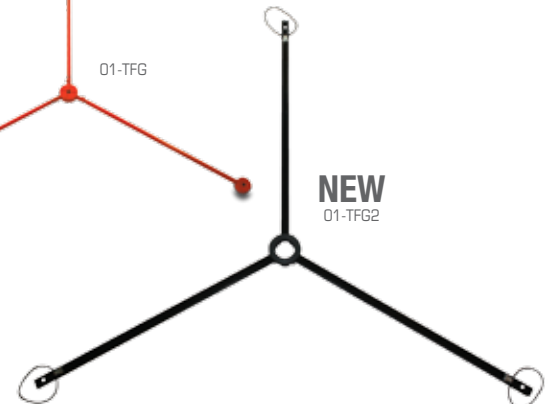

**NEW**  
01-TFG2



## SPR-SERIES SURVEYOR'S FIBERGLASS LEVELING RODS (SVR-TYPE)

- ▶ Rectangular-oval shape fiberglass rod- flat on the front and back with round corners, preventing the scale from rolling
- ▶ Locking mechanisms are round and designed to prevent jamming from dirt
- ▶ Non-conductive telescoping fiberglass which are water-proof and corrosion-resistant
- ▶ Glare resistant, easy-to-read graduations and a special measuring scale on the backside, suitable for many clearance and height measurements
- ▶ Includes carrying case

Item	Length	Graduations	Sections	Collapsed	Wgt
<b>11-SPR17-T</b>	17-ft	10ths/100ths	5	48-in (122cm)	5.00 lb (2.27kg)
<b>11-SPR17-C</b>	17-ft	Inches/8ths	5	48-in (122cm)	5.00 lb (2.27kg)
<b>11-SPR25-T</b>	25-ft	10ths/100ths	6	58.5-in (149cm)	6.00 lb (2.72kg)
<b>11-SPR25-C</b>	25-ft	Inches/8ths	6	58.5-in (149cm)	6.00 lb (2.72kg)
<b>11-SPR07-M</b>	7.6m	Metric "E"	6	58.5-in (149cm)	6.00 lb (2.72kg)

## HI-VIS FIBERGLASS LEVELING RODS (CR-TYPE)

- ▶ Hi-visibility bottom section is safety-yellow for easy and quick visual of rod
- ▶ Non-conductive telescoping fiberglass Lightweight and durable telescoping leveling rods
- ▶ Easy-to-read graduations and a special measuring scale on the backside, permits users to read height at eye level
- ▶ Includes carrying case

Item	Length	Graduations	Sections	Collapsed	Wgt
<b>11-916HV-T</b>	16-ft	High Visibility, 10ths/100ths	4	50-in (127cm)	4.95 lb (2.25kg)
<b>11-916HV-C</b>	16-ft	High Visibility, Inches/8ths	4	50-in (127cm)	4.95 lb (2.25kg)
<b>11-925HV-T</b>	25-ft	High Visibility, 10ths/100ths	5	63-in (160cm)	8.15 lb (3.70kg)
<b>11-925HV-C</b>	25-ft	High Visibility, Inches/8ths	5	63-in (160cm)	8.15 lb (3.70kg)
<b>11-907HV-M</b>	7m	High Visibility, Metric "E"	5	63-in (160cm)	8.15 lb (3.70kg)

**Safety Yellow with Red Markings Improve Visibility**  
increasing performance and safety on the jobsite.



## ROD LEVEL

- ▶ Strong aluminum housing, quickly level your leveling rod with convenience
- ▶ Large, easy to read 10-min bubble vial

Item	Description	Vial
<b>11-750</b>	Rod Level	10 min.



Front Back

**NEW**  
11-SPR25-T


## Graduations Available



**8ths**  
Feet, Inches, and 8ths



**10ths**  
Feet, 10ths, and 100ths

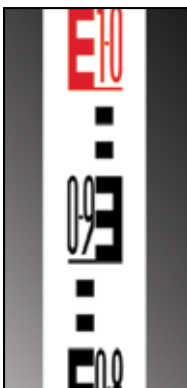

**Metric**  
Metric 'E'



## FIBERGLASS LEVELING RODS (CR-TYPE)

- ▶ Non-conductive telescoping fiberglass Lightweight and durable telescoping leveling rods
- ▶ Easy-to-read graduations and a special measuring scale on the backside, permits users to read height at eye level
- ▶ Includes carrying case

Item	Length	Graduations	Sections	Collapsed	Wgt
<b>11-913-C</b>	13-ft	Feet/Inches/8ths	3	58-in (148cm)	4.5 lb (2.0kg)
<b>11-913-T</b>	13-ft	Feet/10ths/100ths	3	58-in (148cm)	4.5 lb (2.0kg)
<b>11-905-M</b>	5m	Metric "E"	4	52-in (132cm)	6.2 lb (kg)
<b>11-916-C</b>	16-ft	Feet/Inches/8ths	4	57-in (145cm)	6.2 lb (2.8kg)
<b>11-916-T</b>	16-ft	Feet/10ths/100ths	4	57-in (145cm)	6.2 lb (2.8kg)
<b>11-920-C</b>	20-ft	Feet/Inches/8ths	5	58-in (147cm)	7.2 lb (3.3kg)
<b>11-920-T</b>	20-ft	Feet/10ths/100ths	5	58-in (147cm)	7.2 lb (3.3kg)
<b>11-925-C</b>	25-ft	Feet/Inches/8ths	5	63.5-in (161cm)	10 lb (4.5kg)
<b>11-925-T</b>	25-ft	Feet/10ths/100ths	5	63.5-in (161cm)	10 lb (4.5kg)

## ALUMINUM LEVELING RODS (CR-TYPE)

- ▶ Lightweight and durable telescoping aluminum leveling rods
- ▶ Easy-to-read graduations with measuring scale on the backside for direct reading at eye level
- ▶ Includes leveling bubble vial attachment and carrying case

Item	Length	Graduations	Sections	Collapsed	Wgt
<b>11-813-C</b>	13-ft	Feet/Inches/8ths	4	47-in (119cm)	3.0 lb (1.4kg)
<b>11-813-T</b>	13-ft	Feet/10ths/100ths	4	47-in (119cm)	3.0 lb (1.4kg)
<b>11-805-M</b>	5m	Metric "E"	5	48-in (122cm)	3.5 lb (1.6kg)
<b>11-805-MC</b>	16-ft/5m	Metric 'E', Feet/Inches/8ths	5	48-in (122cm)	3.5 lb (1.6kg)
<b>11-805-MT</b>	16-ft/5m	Metric 'E', Feet/10ths/100ths	5	48-in (122cm)	3.5 lb (1.6kg)
<b>11-816-C</b>	16-ft	Feet/Inches/8ths	5	48-in (123cm)	3.5 lb (1.6kg)
<b>11-816-T</b>	16-ft	Feet/10ths/100ths	5	48-in (123cm)	3.5 lb (1.6kg)

**Bubble Vial Attachment**  
Easily clips into slot for quick leveling of aluminum rods.



Front Back

# High-Performance

## 550-SERIES SURVEYORS HI-VIS LIME SAFETY VEST, CLASS 2

- ▶ Solid Polyester Front with Mesh Back
- ▶ Zipper Front Closure Reinforced with Durable Webbing
- ▶ Meets ANSI/ISEA Class 2 requirements
- ▶ Silver Reflective Material Laminated to **Contrasting Orange Color**
- ▶ Left and Right Mic Tabs
- ▶ Back Pouch for Additional Storage

### Pockets:

- ▶ Left chest 2-tier pocket with dual function flap that can be held open by hook & loop
- ▶ Large right gusseted pocket with flap
- ▶ Outside lower front pockets with flaps, left and right stake pockets, left and right elastic pockets
- ▶ Lower inside left and right full length zipper pockets with load-bearing straps
- ▶ Left and right side spray can holders
- ▶ Hidden back pouch with left and right zipper access

Item	Size	Color
<b>23-550-S</b>	Small	Hi-Vis Florescent Lime
<b>23-550-M</b>	Medium	Hi-Vis Florescent Lime
<b>23-550-L</b>	Large	Hi-Vis Florescent Lime
<b>23-550-XL</b>	X-Large	Hi-Vis Florescent Lime
<b>23-550-2X</b>	2X-Large	Hi-Vis Florescent Lime
<b>23-550-3X</b>	3X-Large	Hi-Vis Florescent Lime



## 550-SERIES SURVEYORS ORANGE SAFETY VEST, CLASS 2

- ▶ New surveyors vest now in orange with Silver Reflective Material Laminated to **Contrasting Yellow Color**

Item	Size	Color
<b>23-550-ORS</b>	Small	Orange
<b>23-550-ORM</b>	Medium	Orange
<b>23-550-ORL</b>	Large	Orange
<b>23-550-ORXL</b>	X-Large	Orange
<b>23-550-OR2X</b>	2X-Large	Orange
<b>23-550-OR3X</b>	3X-Large	Orange



**NEW**

Sizing Chart 550-Series		
Size	Length*	Chest*
Small	26"	36-38"
Medium	26.5"	40-42"
Large	28.0"	44-46"
X-Large	28.5"	48-50"
2X-Large	28.5"	52-54"
3X-Large	29.5"	56-58"

\*Measurements are approximate



## 500-SERIES CONSTRUCTION HI-VIS LIMESAFETY VEST

- ▶ Multi-pocket ultra-cool design
- ▶ Solid polyester front with 100% polyester mesh back
- ▶ Silver Reflective Material Laminated to **Contrasting Orange Color**
- ▶ Zipper front closure reinforced with durable webbing
- ▶ 2" silver reflective material laminated to 3" contrasting color

### Multiple Pockets:

- ▶ Left chest 2-tier pocket with pencil pocket
- ▶ Right chest radio pocket with flap
- ▶ Two inside patch pockets
- ▶ Hidden back pouch with left and right zipper access

Item	Size	Color
<b>23-500-S</b>	Small	Hi-Vis Florescent Lime
<b>23-500-M</b>	Medium	Hi-Vis Florescent Lime
<b>23-500-L</b>	Large	Hi-Vis Florescent Lime
<b>23-500-XL</b>	X-Large	Hi-Vis Florescent Lime
<b>23-500-2X</b>	2X-Large	Hi-Vis Florescent Lime
<b>23-500-3X</b>	3X-Large	Hi-Vis Florescent Lime
<b>23-500-4X</b>	4X-Large	Hi-Vis Florescent Lime



**NEW**

Item	Size	Color
<b>23-500-ORS</b>	Small	Orange
<b>23-500-ORM</b>	Medium	Orange
<b>23-500-ORL</b>	Large	Orange
<b>23-500-ORXL</b>	X-Large	Orange
<b>23-500-OR2X</b>	2X-Large	Orange
<b>23-500-OR3X</b>	3X-Large	Orange
<b>23-500-OR4X</b>	4X-Large	Orange



## 500-SERIES CONSTRUCTION ORANGE SAFETY VEST

- ▶ New construction vest now in orange with Silver Reflective Material Laminated to **Contrasting Yellow Color**

## HAND TOOLS

### ENGINEER'S HAMMER

- ▶ Forged steel head which is hardened and tempered
- ▶ Dual machine finished faces that are beveled and fully polished
- ▶ Designed for striking spikes and hardened nails, cold chisels, brick chisels, punches, star drills
- ▶ Textured yellow fiberglass handle which allows for heavier blows in an environment where there is limited swing
- ▶ Ribbed grip to help prevent slipping



Item	Weight	Depth	Width	Handle
<b>17-030</b>	Head: 48 oz (1.4kg) Hammer: 53 oz (1.5kg)	1.75" (44mm)	4.25" (108mm)	12.5" (318mm)
<b>17-040</b>	Head: 64 oz (1.8kg) Hammer: 70 oz (2.0kg)	1.75" (44mm)	5.0" (127mm)	13.5" (343mm)

### MACHETE

- ▶ Carbon steel, 15 guage
- ▶ Handle is brass riveted



Item	Description	Length	Wgt
<b>17-222</b>	22" Machete	22"	22 oz
<b>17-223</b>	Sheath for 22" Machete	22"	-

# MEASURING TAPES

## TAPES, FIBERGLASS

- ▶ Durable with non-woven pvc-coated fiberglass, waterproof
- ▶ Dual-sided graduations
- ▶ Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- ▶ Tape width is 1/2" with various graduations available.

Item	Length	End	UOM
<b>34-Y1001</b>	100'	Type B	10ths/100ths
<b>34-Y2001</b>	200'	Type B	10ths/100ths
<b>34-Y3001</b>	300'	Type B	10ths/100ths
<b>34-Y1008M</b>	Side 1: 100' Side 2: 30m	Type B	Side 1: Inch/8ths Side 2: Meter/cm/mm
<b>34-Y1001M</b>	Side 1: 100' Side 2: 30m	Type B	Side 1: 10ths/100ths Side 2: Meter/cm/mm
<b>34-Y1658M</b>	Side 1: 165' Side 2: 50m	Type B	Side 1: Inch/8ths Side 2: Meter/cm/mm
<b>34-Y1651M</b>	Side 1: 165' Side 2: 50m	Type B	Side 1: 10ths/100ths Side 2: Meter/cm/mm
<b>34-Y1008</b>	100'	Type B	Inch/8ths
<b>34-Y2008</b>	200'	Type B	Inch/8ths
<b>34-Y3008</b>	300'	Type B	Inch/8ths
<b>34-Y3008M</b>	Side 1: 300' Side 2: 100m	Type B	Side 1: Inch/8ths Side 2: Meter/cm/mm
<b>34-Y30M</b>	30M	Type B	Meter/cm/mm
<b>34-Y50M</b>	50M	Type B	Meter/cm/mm
<b>34-Y100M</b>	100M	Type B	Meter/cm/mm



## REFILL, FIBERGLASS TAPE

Item	Length	End	UOM
<b>33-Y508</b>	50'	Type B	Inch/8ths
<b>33-Y1008</b>	100'	Type B	Inch/8ths
<b>33-Y1658</b>	165'	Type B	Inch/8ths
<b>33-Y2008</b>	200'	Type B	Inch/8ths
<b>33-Y3008</b>	300'	Type B	Inch/8ths

## TAPES, NYLON-CLAD STEEL

- ▶ Accurate and durable high tempered steel tapes with temperature stability for superior performance.
- ▶ Nylon coated wear-resistant graduated tape withstands the extreme conditions
- ▶ Dual-sided graduations
- ▶ Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- ▶ Tape width is 1/2" with various graduations available.

Item	Length	End	UOM
<b>32-10010B</b>	100'	Type B	10ths/100ths
<b>32-20010B</b>	200'	Type B	10ths/100ths
<b>32-30010B</b>	300'	Type B	10ths/100ths
<b>32-10080B</b>	100'	Type B	Inch/8ths
<b>32-20080B</b>	200'	Type B	Inch/8ths
<b>32-30080B</b>	300'	Type B	Inch/8ths
<b>32-30MA</b>	30m	Type A	Meter/cm/mm
<b>32-50MA</b>	50m	Type A	Meter/cm/mm
<b>32-100MA</b>	100m	Type A	Meter/cm/mm



'Type B' End has a hook end where zero begins at hook.

'Type A' End has loop-end for surveyors with zero offset.

## TAPES, DEPTH GAUGE

Lightweight fiberglass tapes are rugged and versatile, ideal for measuring in water, mud, and rough terrain.

Item	Length	UOM	Item	Length	UOM
<b>35-2588</b>	25'	Ft/In	<b>35-20088</b>	200'	Ft/In
<b>35-5088</b>	50'	Ft/In	<b>35-30MM</b>	30M	Metric
<b>35-10088</b>	100'	Ft/In			



## HAND LEVELS

### 640 5-1/4" ABNEY LEVEL

- Features radius arc graduated 0 to 90 degrees in both directions, with vernier reading to 10 minutes
- Percent of grade scale from 0 to 100%
- Includes belt loop case



### 642 6-1/4" TOPOGRAPHIC ABNEY LEVEL

- All brass construction, square sighting tube with internal focusing telescope
- Dual interchangeable arcs: one arc graduated in percentage of grade/degrees (bi-directional, 0° to 60°) and one graduated in percentage of grade/topographic scale
- Includes belt loop case



### 632 6" HEAVY DUTY BRASS HAND LEVEL

- 2X magnification
- 6" long draw eyepiece extends to 7-1/2"
- Internally mounted bubble assembly



### 590 2.5X HAND LEVEL

- 2.5X magnification
- Convenient pocket-sized tool for establishing a level line of sight; Ideal for leveling, grading and hundreds of construction tasks
- Stadia and vertical lines
- Includes carrying case




Technical Data	13-640	13-642	13-632	13-590
Magnification	1 X	1 X	2 X	2.5 X
Length	5 1/4-in (13.3cm)	6 3/8-in (16.1cm)	6-in (15.2cm), Extended: 7.5-in (19.1cm)	5-in (12.7cm)
Degrees (10min)	0° - 90°	0° - 60°	n/a	n/a
% Grade	Yes	Yes	n/a	n/a

## FIELD SUPPLIES


### FIELD BOOK

SitePro field books are made with white ledger paper with extra-stiff hard cover book. Published on fine 50% cotton content ledger paper. Protected by a waterproof barrier with blind embossing.

- 80 Sheets (160 pages)
- 50% cotton rag content paper
- Ruled light blue with red vertical lines
- Hardback, yellow color
- Size: 4" x 6-1/2"



17-325-L Level Book



17-350-T Transit Book



Item	Description	Left Page	Right Page	Pages
<b>17-325-L</b>	Level Field Book	Six (6) Vertical Columns	Six (6) Vertical Columns	160
<b>17-350-T</b>	Transit Field Book	Six (6) Vertical Columns	8 x 4 Grid	160



## PLUMB BOBS

- Precision machined for perfect balance and treated for a lasting finish
- Steel ASA screw cap allows storage for an extra point (included)
- Includes a hardened steel point with ASA thread.



Item	Weight
<b>15-016</b>	16 oz (454 g)
<b>15-018</b>	18 oz (510 g)
<b>15-024</b>	24 oz (680 g)

## GAMMON REELS

- An aid to set up and deploy a clean, accurate plumb
- Draw the bob to desired position and stop with finger pressure
- Steel clock spring retracts the string back into case



Item	Description
<b>15-728</b>	Hi-Vis Black and Orange Target
<b>15-729</b>	12-ft (3.6m) Gammon Reel
<b>15-730</b>	6-1/2 ft (1.9m) Gammon Reel with 72lb test Orange Nylon Cord

## PLUMB BOB SHEATHS

- Heavy duty and riveted for long life
- Made of top grain saddle leather
- Strong metal snap secures bob in sheath



Item	Description	Size
<b>15-1016</b>	Small Plumb Bob Sheath	16oz - 18oz
<b>15-2432</b>	Large Plumb Bob Sheath	24oz - 32oz

## TALLY COUNTER

- Four-digit counter counts up to 9999, with reset to zero
- "Audible click" signals a registered count without viewing the counter
- White digits on black for easy reading with protective window



Item	Description
<b>17-100</b>	Four-Digit Mechanical Tally Counter

## GIANT CONCRETE SCRIBE

- Ideal for fine line marking on metal and stone
- Machined aluminum handles with diamond knurling for sure grip
- Precision ground carbide scribe tip
- Pocket clip and protective cap



Item	Description	Tip
<b>17-207</b>	7-1/2 in Concrete Scribe, with Replaceable Tip	Carbide
<b>17-201</b>	Tip, Replacement	Carbide

## MARKING PINS



Item	Description
<b>17-401</b>	14-in Marking Pins. Made of 3/16-in spring steel, heat treated, painted red/white. 11 pins per box
<b>17-406</b>	Leather Quiver for Marking Pins
<b>17-411</b>	Marking Pin Carrying Ring, 3/16-in spring steel, chrome plated to insure a long field life

## TRANSIT COMPASS

- Graduated circle for optimal versatility
- Dampened for superior stability
- Includes velvet lined, belt-loop case for storage and transport



Item	Description
<b>17-651</b>	Compass, Transit Pocket 0-360 Degrees
<b>17-661</b>	Compass, Transit Pocket Quadrants

## RIGHT ANGLE PRISM


- ▶ Center lens permits foresight viewing
- ▶ Step off angles of 90° and 180°
- ▶ Features a larger field of view, and larger foresight viewing glass
- ▶ Includes carrying case



Item	Description
<b>17-911</b>	Precise Large Double Right Angle Prism

## SURVEY MARKERS

- ▶ Cast from solid brass
- ▶ Ideal for boundary or general survey markers
- ▶ Shank is ribbed to prevent turning or loosening
- ▶ Non-glare finish
- ▶ Available in both flat and domed head design



Item	Length	Type
<b>19-700</b>	1-3/8 in (34.9mm)	Flat
<b>19-701</b>	2 in (50.8mm)	Flat
<b>19-702</b>	2-1/2 in (63.5mm)	Flat
<b>19-703</b>	3 in (76.2mm)	Flat
<b>19-705</b>	2 in (50.8mm)	Domed
<b>19-706</b>	2-1/2 in (63.5mm)	Domed
<b>19-707</b>	3 in (76.2mm)	Domed

## DW SITEPRO HI-MAGNETIC MASONRY NAILS

- ▶ 3 times easier to locate the other nails on the market
- ▶ Most preferred by professionals
- ▶ Zinc plated to resist corrosion
- ▶ Large targeted center point
- ▶ 6 sizes available from 2-1/2 to 3/4 inches in length



Model	Length	Diameter	Per Box
<b>20-751</b>	3/4 in (19.05mm)	1/8 in (3.18mm)	100
<b>20-752</b>	1 in (25.4mm)	5/32 in (3.97mm)	100
<b>20-753</b>	1-1/4 in (31.75mm)	3/16 in (4.76mm)	100
<b>20-754</b>	1-1/2 in (38.1mm)	1/4 in (6.35mm)	100
<b>20-755</b>	2 in (50.8mm)	1/4 in (6.35mm)	100
<b>20-756</b>	2-1/2 in (63.5mm)	1/4 in (6.35mm)	100

## TACK BALL

- ▶ 3" (76 mm) rubber sponge ball
- ▶ Ideal for holding stake tacks
- ▶ Black nylon loop



Item	Description	Diameter
<b>19-BALL750</b>	Tack Ball, with Loop	3" (76 mm)

## CAN HOLDER

- ▶ Heavy duty nylon construction with nylon webbing belt loop
- ▶ Holds a paint can on hip for easy access
- ▶ Color: Orange, 0.14lb (0.06kg)

Item	Description
<b>21-PC50</b>	Spray Paint Can Holder



## BAGS AND CASES

Item	Description	Purpose
<b>21-1200</b>	Padded Bag, Tribrach	Fits 05-1200 tribrachs
<b>21-1010</b>	Padded Bag, Prism	Fits 03-1010 prisms
<b>21-3500</b>	Padded Hard Case, Traverse Kit	Fits 05-3511K
<b>21-4360</b>	Carrying Case, Bipod/Rod	Call for details



## 48" LATH BAG

- ▶ 8-inch diameter bag
- ▶ Orange with shoulder strap
- ▶ Reinforced base for carrying 48-inch (122cm) wooden lath
- ▶ Outside pockets

Item	Description	Purpose
<b>21-200</b>	Lath Carrier Bag	Carries up to 50 lath.



**SitePro**<sup>TM</sup>

Toll: (855) 354-9881

Fax: (765) 581-4098

[sales@sitepro.us.com](mailto:sales@sitepro.us.com)

[www.SitePro.us.com](http://www.SitePro.us.com)