

# WM1500HZD & 2500HZD

## Installation Instruction

Select a place to mount the unit where the exhaust airflow is unobstructed for a minimum of 6 inch. The area into which the unit exhausts must be well ventilated. If it is not, heat exhausted by the unit will build up and the unit will not operate properly. Additionally, cold air from the front opening must remain unobstructed. The unit should be mounted near the ceiling and as close to equal distance from each end of the wall as possible.

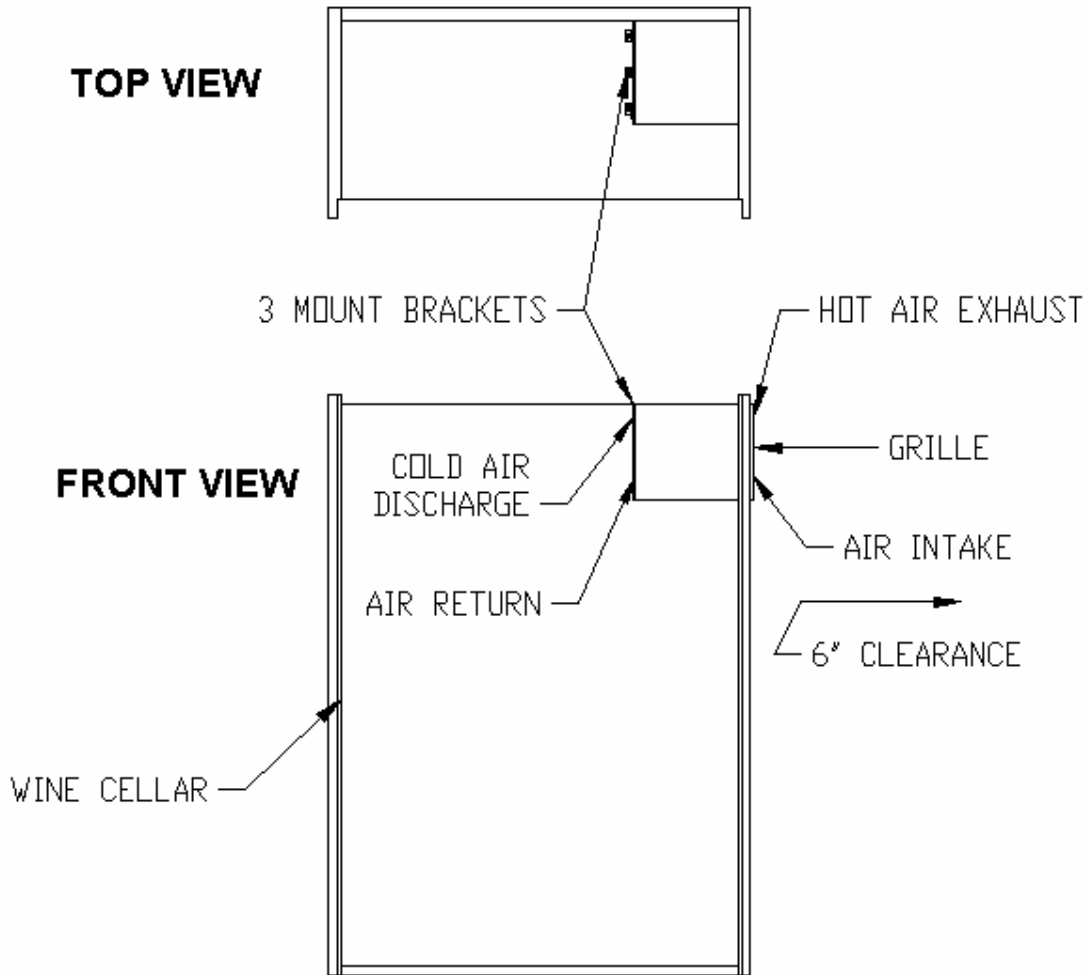
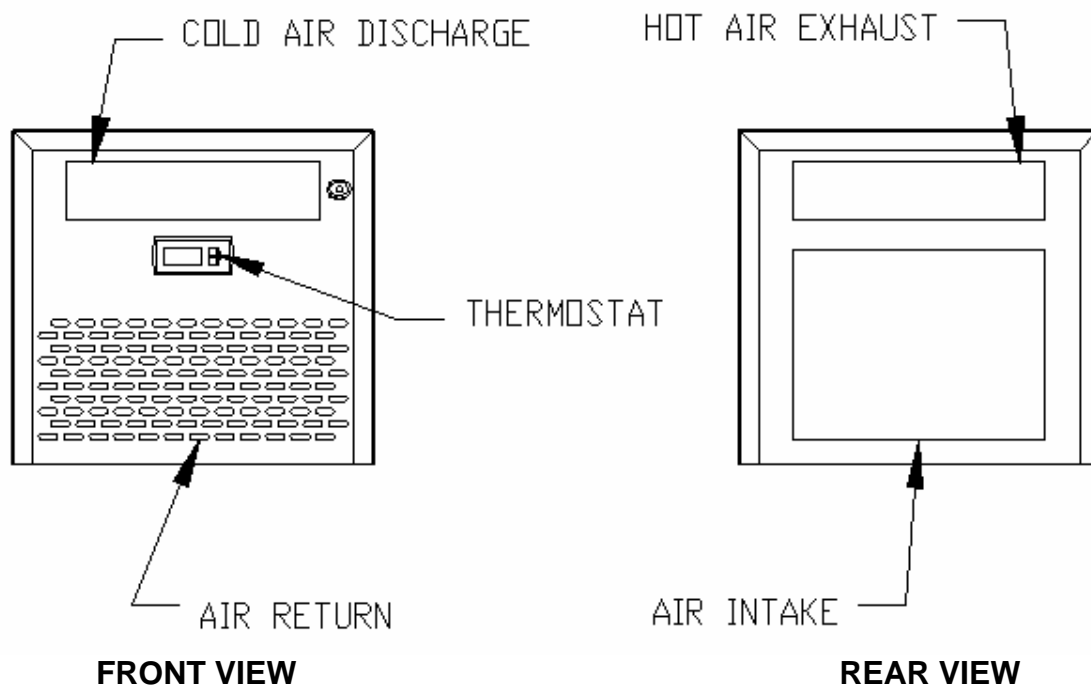


Figure 4-1



**Figure 4-2**

Make an opening in the wine cellar wall as illustrated in Fig. 4-1. The dimensions of the opening should be  $\frac{1}{4}$  inch larger than the width and height of the unit. Construct a shelf as shown in Fig.4-1. The shelf must be capable of supporting the weight of the unit. Place the unit on the shelf with the back of unit flush with the outside of the wall. Attach the grille to the outside wall with screws. Seal the inside with a high quality weather stripping and cover with molding. Attach the molding to the wall not the unit. Plug the unit into a properly grounded and dedicated outlet of adequate capacity.

Because of potential safety hazards under a certain condition we strongly recommend against the use of an extension cord. However, if you still select to use an extension cord, it is absolutely necessary that it is a UL LISTED 3-wire grounding type appliance extension cord having a 3-blade grounding plug and a 3-slot receptacle that will plug into the appliance. The marked rating of the extension cord should be 115 V, 15 A. or equivalent and not greater than 15ft in length.