



MCR41-MCR42 User Manual

Single-Dual True Diversity Camera Receiver



SN: _____

rev.05 (rif. FW 1.0.66)

Author: Support

Date: 05 April 2013

BRIEF DESCRIPTION

MCR41/42 is a high performance microphone receiver suitable for **broadcast and high professional** applications.

Thanks to Wisycom movable filter technology, MCR42 is able to work in a **bandwidth up to 230** MHz, still keeping an exceptional selectivity and intermodulation immunity.

This miniature design allows to integrate a **DUAL TRUE DIVERSITY** receiver while keeping a small size to fit camera slot in:

- Ikegami/Panasonic (UNISLOT™)
- Philips/Thomson/Grass Valley
- Sony

The audio receiver block is **fully digital** to allow a better quality, digital output and emulation of most of companding chipsets. It supports also AES3 audio output with an overall sounds delay below 1.5 msec.

MCR42 is designed to be:

- “easy & quick to use” thanks to automatic setup functions (i.e. frequencies, squelch, scan), remote configuration utilities (thru infrared), an OLED display with intuitive context menu navigation.
- “extremely flexible”, with an incredible frequency agility up to 230MHz. Moreover the DSP board allows analogue and digital (AES3) output, with multi-companding compatibilities and other digital features.
- “best in class performances”, thanks to the latest Wisycom technology the unit has extreme RF sensitivity and immunity and superb audio quality.
- “a durable & upgradable investment”, thanks to the very robust design (aluminum housing) and the possibility to upgrade/enhance units performances.

Moreover MCR42 system is already set up for the exclusive **PTT function** (remote command), developed and patented by Wisycom and now appreciated in the broadcast world:

Simply pushing this button (PTT), the presenter causes the remote switching of the receiver’s output-line, from the “main line” to the additional “intercom line”, in order to be able to talk “off-air” directly with the technical team. Then all PTT’s MICs can be connected in pre-fading allowing a clever intercom setup.

SAFETY INSTRUCTION

- Read this safety instruction and the manual first
- Follow all instructions and information.
- Do not lose this manual.
- Do not use this apparatus under the rain or near the water.
- Do not install the apparatus near heaters or in hot environments, do not use outside the operating temperature range.
- Do not open the apparatus, only qualified service technician are enabled to operate on it. The apparatus needs servicing when it is not properly working or is damaged by liquids, moisture or other objects are fallen in the apparatus.
- Use only accessories or replacement parts authorized or specified by the manufacturer.
- Clean the apparatus only with dry cloths, do not use liquids.
- Report the serial number and the purchasing date in front of the manual. It is needed to have proper replacement parts or accessories from the manufacturer.
- When replacement parts are needed, use only replacement parts authorized from the manufacturer. Substitution with not authorized parts could result in electric shock, hazards or fire.
- Keep attention on all the labels with warnings or hazards on the apparatus.

WARNING: The apparatus is intended for professional use; anyway the manufacturer alerts the user that the headphone output power of the apparatus could exceed the level of 85 dB(A) of sound pressure level and this could be dangerous for the hearings. Do not use the headphone with high power level or for long time. Reduce the power or suspend the hearing in case of any kind of hearing problem.

WARNING: when operating thru battery pack always replace ALL BATTERIES.

DO NOT operate the device with some new and some old batteries.

When MCR42 is setup to “automatically turn on”, DO CHANGE ALL OF USED BATTERIES after automatic low batteries shutdown.

MAIN FEATURES

MCR41/42(*) is a camera dual true diversity wireless-microphone receiver system in a modular stand-alone or slot-in configuration (compatible with most camera's slot):

- Extreme RF (radiofrequency) performances and reliability
- Extreme frequency agility (tuning windows up to 240 MHz with independent tunable filters on 2 ch's):

MCR42-L: 470÷678 MHz

MCR42-H: 590÷822 MHz

MCR42-N: 470÷700 MHz

MCR42-M: 566÷798 MHz

(extended range up to 830 available on request and upon your country-specific regulations)

- digital output on AES3
- multi-compressing compatibility
- future digital functionality enhancements
- Automatic scan for best channels, squelch and other automatic setup
- Infrared interface (i.e. for system setup, microphone programming)
- Automatic transmitter re-programming (thru infrared, sync function)
- Push to Talk (PTT) function with additional audio output signals (patented)

(*) Note MCR41 is the version with only one diversity RX board mounted. It supports all features of MCR42 and is compatible with MCR42 Firmware.

It is also possible to mount the second Rx board to upgrade a MCR41 to an MCR42.


Technical description

The MCR42 is a professional dual true diversity receiver for wireless microphones reception especially designed for broadcast production, live stages, theatres and top professional applications.

It's winning performances are:

- High immunity on strong RF environment
- Huge switching bandwidth
- High audio performances and flexibility with analog or digital processors
- High reliability and durability

One of the milestones in the design of the MCR42 is high reliability: most of the circuitry of the receiver is independent one from each other.

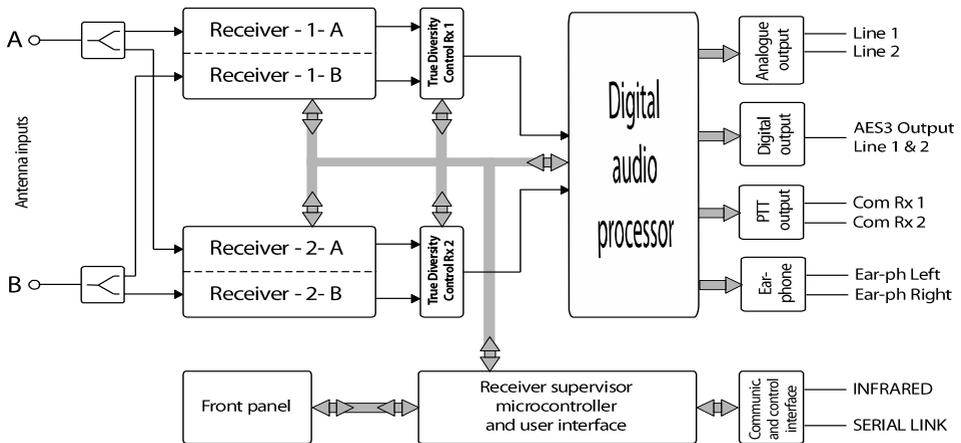

Above a schematic with an overview of main receiver functions.

For each antenna the RF signal is split in the receiver 1 and in the receiver 2 (antenna A and antenna B) with a wide band splitter. In this way any one receiver could be tuned in any frequency of the switching range (typ. 240 MHz).

Receiver 1 and 2 are diversity receivers: each one is made of two receivers tuned on the same frequency, hereafter called section A and section B. The receiver 1 section A and the receiver 2 section A are connected to the antenna A, the receiver 1 section B and the receiver 2 section B are connected at the antenna B.

Each receiver has its own demodulated signal and its own RSSI signal (Receiver Signal Strength Indication); a DSP **selects** or **combines** signals from section A & B to have the best audio. The demodulated signal flows to the digital audio processor.

the data sub carrier is digitally filtered to a very selective equivalent bandwidth (3Hz). Each filter has its own data demodulator, one for medium speed data detection at the output of the first filter and one at low speed data detection at the output of the second filter. All the two demodulators are connected to the supervisor micro controller for the data battery detection and signalling.

Digital audio processor: the demodulated signal is filtered by an anti aliasing low pass filter and then converted in the digital domain with a 96KHz 24bit audio A/D converter. The digital signal processor (DSP), working in double precision, replicates all the analog functions with very high accuracy, ultra low distortion and without typical analog problems like components tolerances or long term drifts or temperature drifts etc. The high speed audio algorithms implemented in assembler into the MCR42 maintains the audio delay at about 1.3 milliseconds, making it ideally for live events and to keep audio delay as short as possible. The DSP unit also filters and demodulates the data carrier and communicates all the parameters and informations to the supervisor micro controller. The audio output goes to the digital outputs (AES3) or is converted in the analog domain with a high quality 24 bits 96KHz D/A converter and an anti-aliasing filter.

USER GUIDE



Front Panel

MCR42 allows an easy and quick configuration using buttons, RGB LED's and an OLED display. The front panel is functionally divided in the following section:

A & B SMA antenna Connector:

MCR42 is supplied with a couple of antenna tuned on 400 MHz bandwidth suitable to be used with both MCR42-L and MCR42-H version.

C RGB Leds: Each of the 2 receivers has a dedicated set of LED's to give a clear indication of its status.

"ON LED"

OFF	Relative receiver is not active
GREEN	Relative receiver is active and battery/external power is not low
RED	Relative receiver is active and battery/external power is low
RED BLINKING	Relative transmitter battery is low: - slowly blinking if 25% lifetime - quickly blinking if 12% lifetime

"RF LED"

OFF	Relative receiver is not active
RED	RF level below squelch on both diversity receivers
GREEN	RF level above squelch and receiver A is active (ANTENNA A)
BLUE	RF level above squelch and receiver B is active (ANTENNA B)

“AUDIO LED”

RED	Audio muted due to RF squelch or tone squelch
GREEN	Audio active & tone squelch detected
BLUE	Audio active & tone squelch not detected

D “MENU/SEL” BUTTON

Push this button to navigate function menu's and to confirm the chosen setup.

E “PWR/EXIT” BUTTON

Push and keep this button to power on/off the receiver. The on/off status is permanently memorized into the non-volatile memory, this way the system can be setup to automatically turn on Rx1, or Rx2, or both, when power up.

During menu navigation push this button to exit from current menu (escape function).

F “Arrow up/sync” BUTTON

Push and keep this button to start a synchronization with a Wisycom transmitter (follow instructions on display). Before starting synchronization IRDA must be enabled on Wisycom transmitter.

During menu navigation push this button to move -up and select the previous item.

G “Arrow down/scan” BUTTON

Push and keep this button to start the automatic scan.


During menu navigation push this button to move-down and select the previous item.

H “OLED Display”

The receiver has a high contrast display. Pushing a button while the receiver is active, turn on automatically the display. After a time-out the display turns off automatically.

Display menu


Following a draft of MCR42 menu's structure.

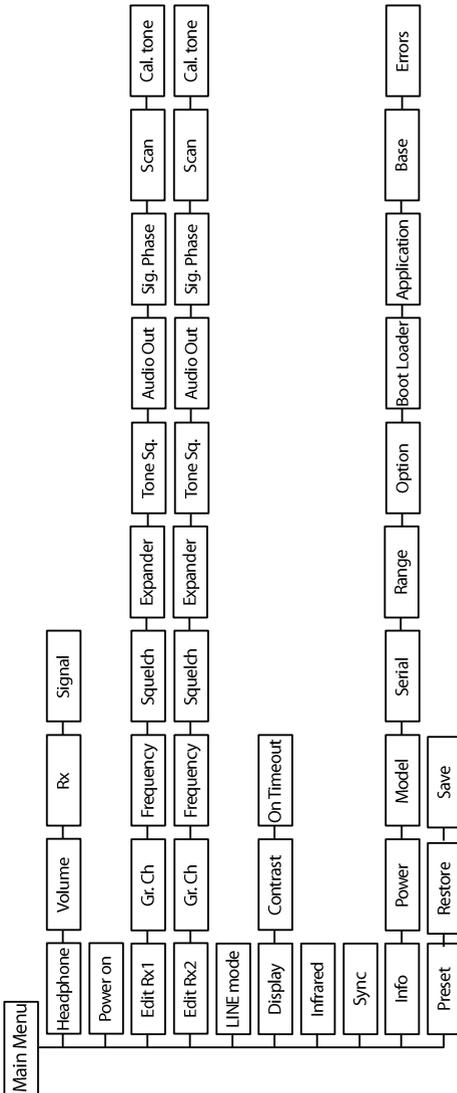

Using navigation buttons it is possible to quick & easy navigate through the MCR42 menu:

- Sel/Exit to enter or exit a level
- Arrow up/down to circle on the same level

MAIN MENU

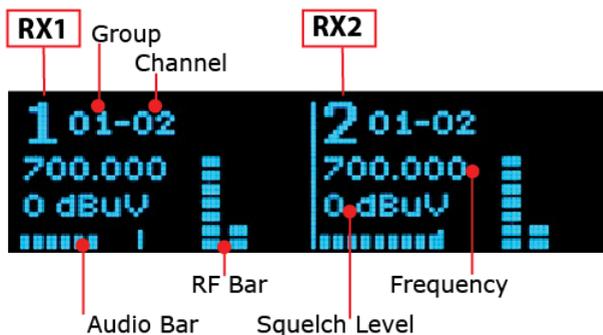

HEADPHONE

Left and right channel of stereo jack can be mapped respectively on line 1 & 2 or on a Line 1 + Line 2. Cycle through menu's with **up/down** arrow to get your desired configuration then confirm with **SEL**.

It is possible to set the desired output level from **Max** (+6 dB) to **min** (-24 dB) in 1 dB step.

POWER ON



To enable each of the two true diversity receivers: Rx1 & Rx2, just Rx1 or just Rx2.

EDIT RX1/RX2



Selecting this sub-menu most of RX1 setups are configurable.

EDIT RX1:GR-Ch



Select current group and channel. Group name and channel frequency are displayed on the right.

EDIT RX1: Frequency


GR: 01 GROUP_01 CH: 02
FREQ: 700.000 MHz

If the specific group/channel is not locked, then can be edited in this menu.

EDIT RX1: Squelch


Frequency ...
Squelch 0 dBuV

This menu allows to disable the RF squelch or to setup the desired squelch level in dBuV (note 0 dBuV is equal to -107 dBm).

EDIT RX1: Expander


Squelch 0 dBuV
Expander ENR

MCR42 core is a power digital audio processor that, besides an unbeatable audio quality and flexibility, can emulate most companders systems on the market. On this menu you can setup the audio companding chipset emulation. ENR is emulating the Philips™ SA572 and PTT digital data of Wisycom transmitters. Other setups can be loaded on request.

EDIT RX1: Tone Squelch


Tone squelch ON
Config OFF ...

MCR42 is able to detect a digital tone squelch generated by a Wisycom transmitters (MTH300/MTP30).

Tone squelch ON: when the tone squelch is enabled the audio is muted unless the correct carrier is detected. Tone squelch allows to work with lower RF squelch, increasing the coverage and the robustness especially in presence of digital television carriers (DVB-T).

Tone squelch ADVanced: when tone squelch is in advanced mode the receiver processes also PTT data (push to talk): activating the command audio output when the button is pressed on remote trasmitter.

EDIT RX1: Config (squelch/PTT)

When tone squelch is on, output matrix between line and com (PTT) can be configured.



When tone squelch is in advanced mode, then it is possible to access a more complex audio matrix.

Usually Line is always thicked and Com (PTT) is thicked on "PTT psh." as additional return channel (intercom).

EDIT RX1: Audio Out

It is possible to set the nominal audio from +6dBu and -24 dBu in one dB step.

EDIT RX1: Sig. Phase

To change audio phase of 0 deg or 180 deg.

EDIT RX1: Scan

This function can be called also using the dedicated scan button (push and keep). It allows to make a scan over a desired frequency group.

MCR42 manages up to 2400 custom frequencies organized in 40 groups of 60 channels each. This extreme flexibility makes the scan function very flexible.

Once started a scan operation the receiver asks for group to be used.

Select group for scan

GR: [01] GROUP_01

Then it prompts to turn off all transmitters.

Switch OFF all tx
before start!


Then finally start the scan!

Scan running: RX1 GR-01

CH: 06

591.000 MHz

After few seconds, scan results are displayed on a chart.

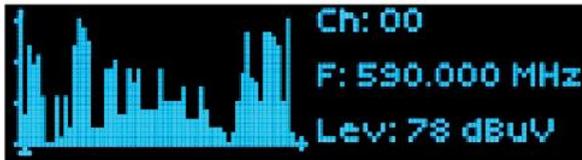

Results can be also displayed sorted by level (**pushing together SYNC and SCAN buttons**), making easier to pick up the best one.



As per Wisycom standard, group 0 and group 9 are special; respectively the “center frequency” (474,482/... MHz) and the intergap frequency (i.e. 470/478/486/... MHz). A scan on group 0 will reveal in few seconds the overall DVB-T occupation on the area, while a scan on group 9 will give possible working frequency, usable also in presence of strong DVB-T signal (sort to speak working in the band-guard of 2 digital television channel).

PRESET:

The preset menu has the following two submenus:

- **Restore:** that allows to reload 3 different presets (named 1, 2, 3) earlier saved or a Factory preset (a preset load in the Wisycom factory)
- **Save:** that allows to save 3 different presets (named 1, 2, 3)

REAR PANEL

BPA42-PTT: Stand alone socket



The standalone socket BPA 42 PTT supplies the following connections.

Analogue Audio Output (Line 1 & 2)

- Audio line-output 1 & 2 : electronically balanced on two 3 pin mini-XLR Female connector
- Audio line-output level : Adjustable in a one dB step between -20 and +6 dBu (nominal) and MAX +12 dBu (peak deviation)
- Audio line-output impeded. : ≤ 200 ohm.

Push to Talk (PTT) Audio Output (Com)

- PTT line-output 1 & 2 : electronically balanced on a 5 pin mini-XLR Male connector

Digital Audio Output AES3

- Digital line-output 1 & 2 : electronically balanced on 3 pin mini-XLR Male connector
- Digital line-output : AES3 @ 48 kHz

BPA42-HPN: Stand alone socket

Option output on stereo 3.5 mm headphone adapter (with locking)

NOTE: Com 1&2 connector are not present



Slot in sockets and Cables

To transform MCR42 in slot-in compatible for a specific camera you need to use a kit with a rear-panel and a flange.

SLK 42-IK for

- Panasonic
- IKEGAMI



S1LK 42-SX

- Sony



SLK 42-PH for

- Grass Valley
- Thomson



CAM50-2

AF cable (50 cm), mini XLR-3F / XLR-3M connectors



CAM50-3

AF cable (50 cm), mini XLR-5F / 2 XLR-3M connectors



CAM50-41

AF cable (50 cm), mini XLR-5F / 1 XLR-3M connectors
Line 1 feed XL3-M (TO BE USED FOR AES3 CAMERA INPUT)



CAM50-42


AF cable (50 cm), mini XLR-5F / 1 XLR-3M connectors
Line 2 feed XL3-M (TO BE USED FOR AES3 CAMERA INPUT)



Stand Alone Mounting


MCR42: Line1 is configured to AES3 output (audio 1 & 2) and PTT

- CAM50-2: Line 1 (digital audio 1&2) connected to XLR-3F AES3 (digital input of the camera)
- CAM50-3: PTT 1&2 connected to 2 XLR-3F intercom/audio inputs of the camera
- CD34: connected to camera power source (if not using the battery pack)

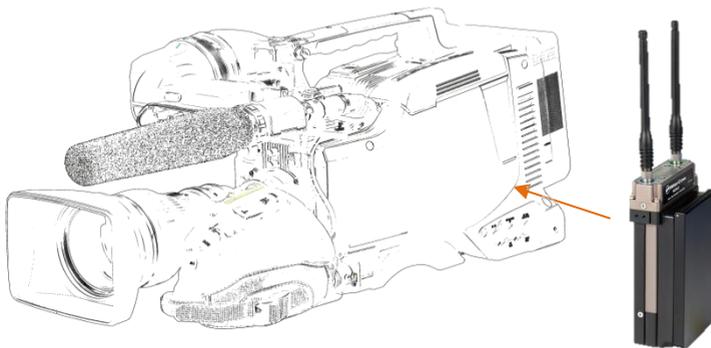

MCR42: Line1&2 are configured to analogue output and PTT


- CAM50-2: Line1 (audio 1) connected to XLR-3F (analogue input of the camera)
- CAM50-2: Line2 (audio 2) connected to XLR-3F (analogue input of the camera)
- CAM50-3: PTT 1&2 connected to 2 XLR-3F intercom/audio inputs of the camera
- CD34: connected to camera power source (if not using the battery pack)

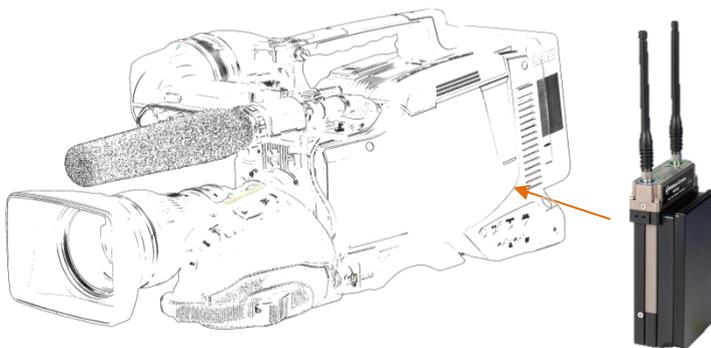

Slot-in Mounting

MCR42: Analogue Audio 1 & 2 audio thru internal slot in

Check if your camera is supporting double internal audio!

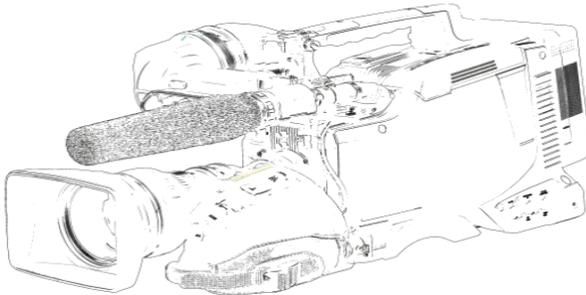


MCR42-EL2 or MCR42-ELC: Digital Audio 1 & 2 thru external AES3 camera input (XLR-3F)

- CAM50-41: Top feed Line 1 (digital audio 1&2) connected to XLR-3F AES3 (digital input of the camera)

MCR42-EL2 or MCR42-ECL: Analogue Audio 1 thru slot in and Audio 2 thru external (XLR-3F)

- CAM50-42: Top feed Line (analogue audio 1) connected to XLR-3F (2° analogue external input of the camera)

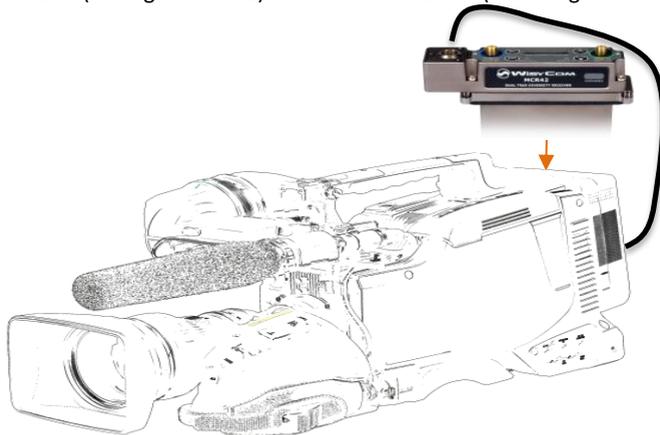


Note: Using CAM50-41 or CAM50-42 or CAM50-3 it is possible to connect also additional PTT outputs to use your microphones as intercom to your camera-man or your control-room. MCR42-H can support also top headphone output for special applications or standalone usage.

TOP FEED OPTIONS & SLOT IN - ACCESSORIES


MCR42 has 4 main audio sources:

- Audio Line 1&2
- AES3 (audio 1&2, 48kHz 24bit)
- PTT (push to talk) 1&2
- Heaphone(left/right)

Top feed can bring on top on a mini-XLR 5M connector two balanced audio called line1 and line2. MCR42-Exx can then be in factory configure to connect on top (line 1 & 2) the audio source you need.

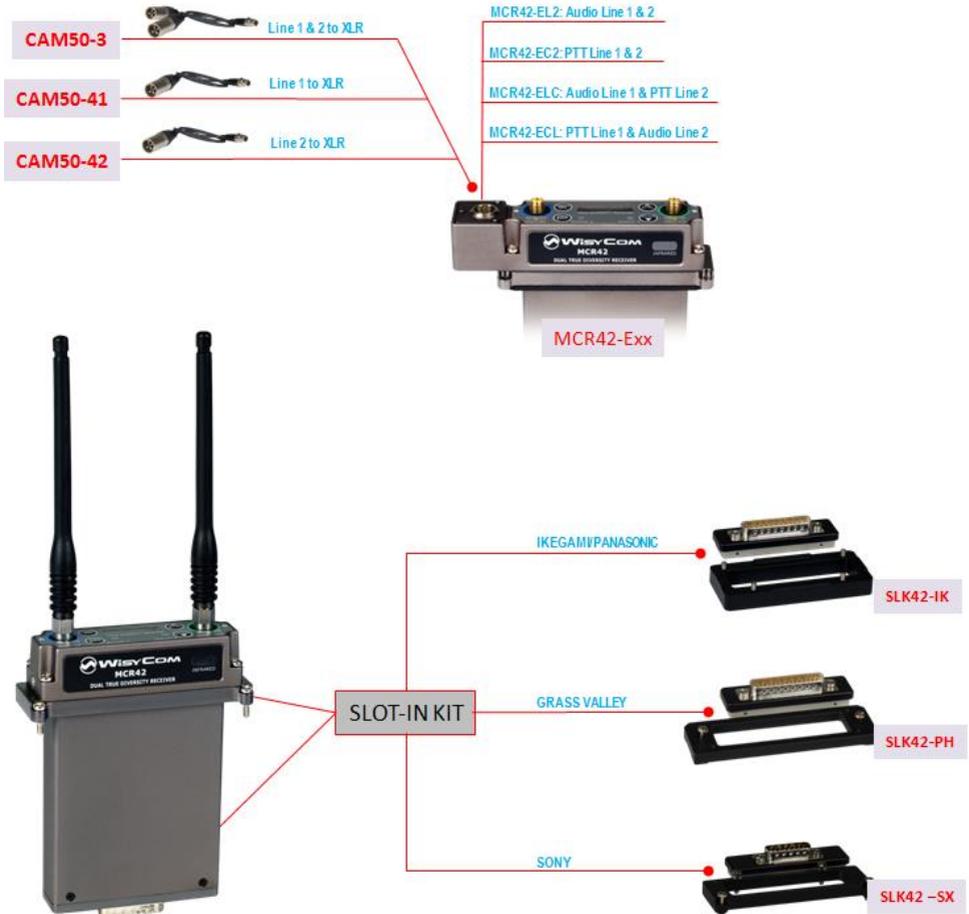

STAND-ALONE - ACCESSORIES

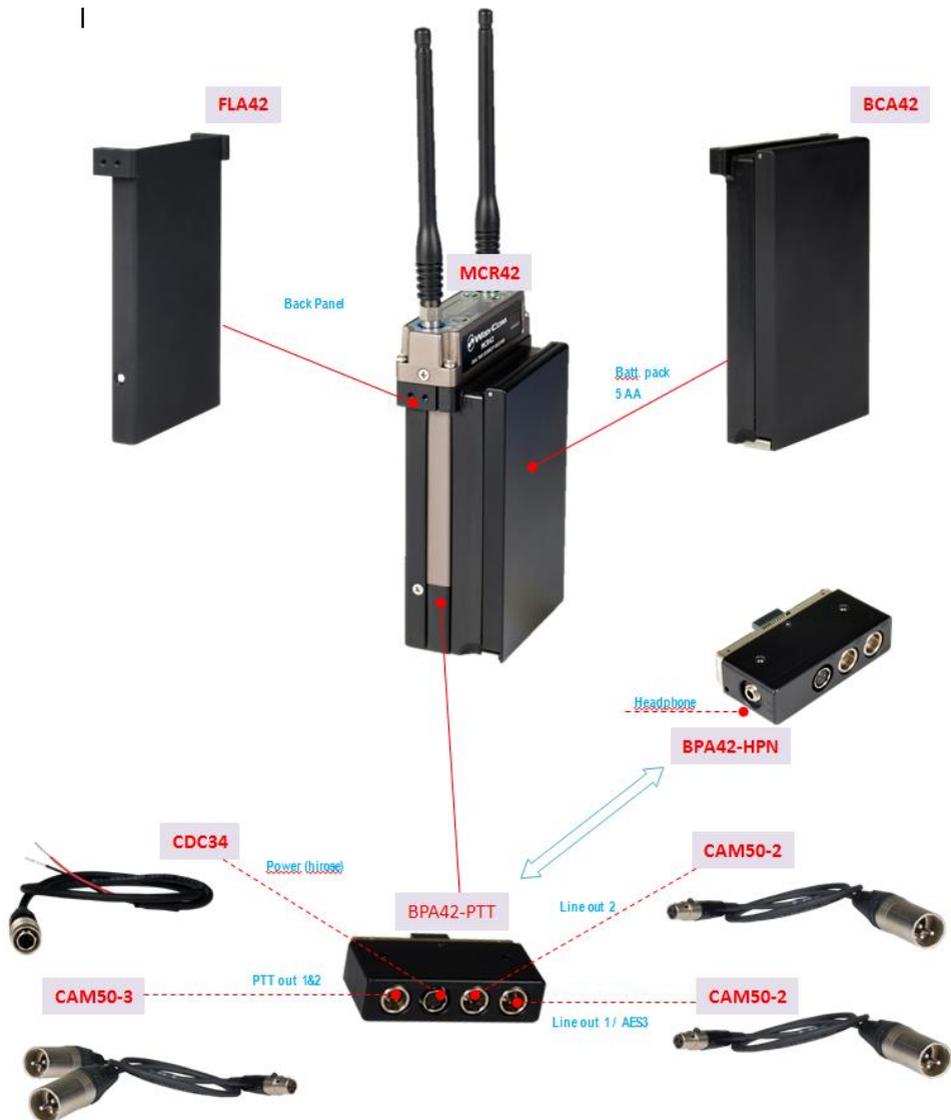

ITALY ONLY

Obblighi di informazione agli utilizzatori***Modello di informazioni agli utenti dei prodotti di tipo "professionale"*****INFORMAZIONE AGLI UTENTI**

ai sensi dell'art. 13 del Decreto Legislativo 25 luglio 2005, n. 151 "Attuazione delle Direttive 2002/95/CE, 2002/96/CE e 2003/108/CE, relative alla riduzione dell'uso di sostanze pericolose nelle apparecchiature elettriche ed elettroniche, nonché allo smaltimento dei rifiuti"



Il simbolo del cassonetto barrato riportato sull'apparecchiatura o sulla sua confezione indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti.

La raccolta differenziata della presente apparecchiatura giunta a fine vita è organizzata e gestita dal produttore. L'utente che vorrà disfarsi della presente apparecchiatura dovrà quindi contattare il produttore e seguire il sistema che questo ha adottato per consentire la raccolta separata dell'apparecchiatura giunta a fine vita.

L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dismessa al riciclaggio, al trattamento e allo smaltimento ambientalmente compatibile contribuisce ad evitare possibili effetti negativi sull'ambiente e sulla salute e favorisce il reimpiego e/o riciclo dei materiali di cui è composta l'apparecchiatura.

Lo smaltimento abusivo del prodotto da parte del detentore comporta l'applicazione delle sanzioni amministrative previste dalla normativa vigente.

DECLARATION OF CONFORMITY

Manufacturer Name: WISYCOM S.r.l.
Manufacturer Address: via Spin, 156
 36060 Romano d'Ezzelino (VI)
 Italy

Herewith we declare that

Product Type : Diversity receivers for professional wireless microphone system

Product Name : MCR 41-L, MCR 41-H, MCR 42-L, MCR 42-H

Optional and Accessories : This declaration includes all the optionals and accessories included into the product.

We declare that the above mentioned product is compliant with 89/336/EEC EMC directive.

- | | | |
|-------------------------------------|-------------|--|
| <input checked="" type="checkbox"/> | EN 60065 | Safety requirements for mains operated electronic and related apparatus for household and similar general use. |
| <input checked="" type="checkbox"/> | ETS 300 422 | Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range. |
| <input checked="" type="checkbox"/> | ETS 300 445 | Radio Equipment and Systems (RES); Electro-Magnetic Compatibility (EMC) standard for wireless microphones and similar Radio Frequency (RF) audio link equipment. |
| <input checked="" type="checkbox"/> | ETS 301 489 | Electromagnetic Compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services. |

The conformity is achieved by fulfilling the following European Standard(s):

Romano d'Ezzelino (VI)
 Address

10-MAY-2010
 Date

WISYCOM s.r.l.
 Franco Maestrelli
 Amministratore Unico




WISYCOM srl
 Via Spin 156 • I-36060 Romano d'Ezzelino • Italy
 Tel. +39 -0424 -382605 • Fax +39 - 0424 - 382733
www.wisycom.com • e-mail: sales@wisycom.com