



# C-Tick EMC TEST REPORT

For

## Laptop Computer

**Brand Name:** OLPC  
**Model NO.:** XO-4 HS / XO-4 / XO-4 HS Touch / XO-4 Touch  
**Report NO.:** 20130222-2  
**Issued Date:** Feb. 22, 2013  
**Issued By:** Compliance Laboratory of Tech-Front (Shanghai) Computer Co., Ltd.  
**Lab Address:** No. 68, Sanzhuang Road, Songjiang Export Processing Zone,  
Shanghai, P. R. China  
**Tel:** +86-21-3781-8168  
**Fax:** +86-21-6774-7135

The test result relate only to the samples tested. The test report shall not be reproduced except in full without the written approval of our laboratory. This report must not be used to claim product endorsement by CNAS or any agency of the Government. The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.



# Test Report Certification

**Applicant:** Quanta Computer Inc  
**Manufacturer:** Quanta Computer Inc  
**Product:** Laptop Computer  
**Brand Name:** OLPC  
**Model Number:** XO-4 HS / XO-4 / XO-4 HS Touch / XO-4 Touch  
**Tested Voltage:** 240V<sub>ac</sub>, 50Hz  
**Tested Date:** Jan. 09-Jan. 12, 2013

### Applicable Standards:

Emission			
Standard	Item	Result	Remark
AS/NZS CISPR22:2009	Conducted (Main Port)	Pass	Meet ClassB limit
	Conducted (Telecom Port)	Pass	Meet ClassB limit
	Radiated	Pass	Meet ClassB limit

The above equipment has been tested by Compliance Laboratory of Tech-Front (Shanghai) Computer Co., Ltd. , and found compliance with the requirements set forth in the technical standards mentioned above. The result of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By

Reviewed By

Herculus Hsu/ EMC manager:

Bill Bo/ Senior engineer



**Section 1: General Information**..... 4

    1.1 Introduction ..... 4

    1.2 Test Procedure ..... 5

**Section 2: Test Facility and Procedure**..... 6

    2.1 Test Facility used for Emission Testing ..... 6

        2.1.1 Measurement Uncertainty ..... 6

        2.1.2 Lab Accreditation .....7

        2.1.3 Software to exercise EUT .....7

        2.1.4 Special Accessories .....7

        2.1.5 Equipment Modifications and Deviations .....7

        2.1.6 Test Configuration .....8

            - Arrangement block diagram ..... 8

            - Associated equipment ..... 8

            - Pre-test configuration .....9

            - Worst case for final testing ..... 10

        2.1.7 Cable Description and Information .....10

    2.2 Measurement Equipment ..... 11

        2.2.1 Conducted Emissions .....11

        2.2.2 Radiated Emissions .....11

**Section 3: Electromagnetic Emissions Test**..... 12

    3.1 Emission ..... 12

        3.1.1 Line Conducted Emissions Test ..... 12

            - Measurement Procedures Utilized for Conducted Emissions ..... 12

            - Limits ..... 13

            - Test setup..... 14

            - Conducted Emissions Test Data ..... 15

        3.1.2 Radiated Emissions Test ..... 17

            - Measurement Procedures Utilized for Radiated Emissions ..... 17

            - Limits ..... 18

            - Test setup..... 18

            - Radiated Emissions Test Data ..... 19

**Section 4: Test Arrangement Photos**..... 23

    4.1 Conducted Emissions ..... 23

    4.2 Radiated Emissions ..... 24



## Section 1: General Information

### 1.1 Introduction

Product	Laptop Computer		
Trade Name	OLPC		
Model Name	XO-4 HS / XO-4 / XO-4 HS Touch / XO-4 Touch		
Housing Type	Plastic		
AC Power Adapter	Bestec	Model	NA0241WAA
			BT-AG250SDF
	Darfon	Model	BU24-1203
			BB0J-C
		BP24-1203	
AC Power Adapter Rating	I/P: 100-240Vac O/P: 13.5Vdc,1.85A/12Vdc,2A		
AC Power Cord Type	Non-shielded AC 2pin (0.9m)		
DC Power Cable Type	Non-shielded DC (1.5m) /Non-shielded DC (1.8m)		
EMMC	4GB / 8GB		
Memory Capacity	1GB / 2GB		
CPU	Marvell	Model	PXA2128 (1.0GHz)
			PXA2128 (1.2GHz)
7.5" LCD Panel	CHIMEI	Model	G075ADE-T01
Camera	SUYIN	Model	CM0316-OLPC01
			CM031B-SE01
	FOXLINK	Model	FE03FF-317H
WLAN	QMI	Model	EM113-MV
	Liteon	Model	WCBN603MH
Battery	BYD	Model	CL1
	STL	Model	XO-1



I/O Port:

I/O Port Types	Quantity
Audio in port	1
Audio out port	1
USB port	2
HDMI port	1
SD Card port	1



### 1.2 Test Procedure

The EUT was tested using special test software called BurnIn test v6.0, which exercises all external I/O ports as well as the internal storage media by writing and reading (if applicable) a continuous stream of “H” characters in font 9. A pattern of continuous stream-scrolling black “H” on a white background was written to display. Played through the internal audio while the EMC testing was being done. The measurements were made while the system was exercised in this manner.



## Section 2: Test Facility and Procedure

### 2.1 Test Facility Used for Emission Testing

**Conducted Emissions Facilities:** Conducted Emissions were performed at Compliance Laboratory of Tech-Front (Shanghai) Computer Co., Ltd. of No.68 Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P. R. China

FCC Registration No. 602285

VCCI Registration No. C-2529/ T-1836

Note: C-2529 for main port (AC power), T-1836 for telecomm port

**Radiated Emissions Facilities:** Radiated Emissions measurements were performed at QSMC Compliance Laboratory of No.68 Sanzhuang Road, Songjiang Export Processing Zone, Shanghai, P. R. China

FCC Registration No. 602285

VCCI Registration No. R-2319 (10m chamber)/ G-191 (10m chamber)/ R-3341 (3m-2 chamber)/ G-209 (3m-2 chamber)/ R-2320(3m-2 chamber)

Note: "R-"to represent bellows 1GHz, "G-"to represent could be used test 1GHz to 6GHz

#### 2.1.1 Measurement Uncertainty

The measurement uncertainty has been determined to be the following:

AC Conducted Emissions = 3.2 dB

Telecom Conducted Emissions = 3.5 dB

Radiated Emissions (30MHz~1000MHz) = 4.1dB

Radiated Emissions (1000MHz~6000MHz) =4.6 dB

The equipment conforms to the requirement of CISPR 16-1, CISPR 16-4-2, ANSI C63.2 and other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective manual.



### 2.1.2 Lab Accreditations

Coverage	Agency	Scope of Accreditation
USA	FCC	3/10 meter chamber and conducted test chamber to perform FCC Part 15/18 measurements
Japan	VCCI	3/10 meter chamber and conducted test chamber to perform radiated / conducted measurements
ISO/IEC 17025	CNAS	FCC 47CFR Part 15; CISPR22; AS/NZS CISPR 22; V-3/2008.04; GB9254; GB17625.1; EN55022; EN61000-3-2; EN 61000-3-3; CISPR24; EN55024; IEC/EN61000-4-2; IEC/EN61000-4-3; IEC/EN61000-4-4; IEC/EN61000-4-5; IEC/EN61000-4-6; IEC/EN61000-4-8; IEC/EN61000-4-11

### 2.1.3 Software to Exercise EUT

The EUT was tested using special test software called BurnIn test v6.0, which exercises all external I/O ports as well as the internal storage media by writing and reading (if applicable) a continuous stream of “H” characters in font 9. A pattern of continuous stream-scrolling black “H” on a white background was written to display. Played through the internal audio while the EMC testing was being done. The measurements were made while the system was exercised in this manner.

### 2.1.4 Special Accessories

There were no special accessories used during these tests.

### 2.1.5 Equipment Modifications and Deviations


There is no EUT modification or test standard deviation.



### 2.1.6 Test Configuration

The EUT was configured as a worst case system configuration as a result from pre-testing as described below:

#### Arrangement Block Diagram

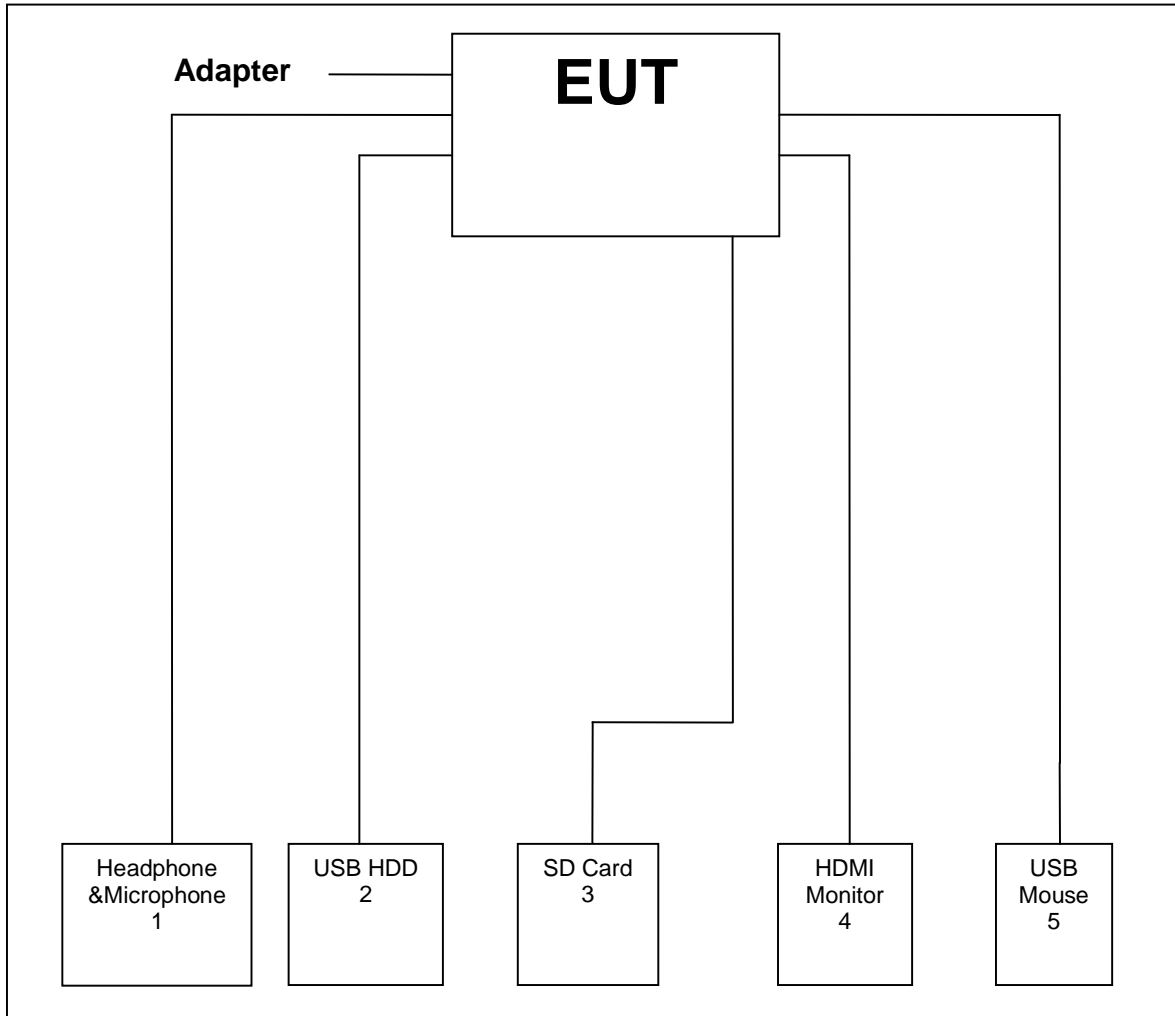

#### Associated Equipments

No.	Interference	Equipment	Brand	Model
1	Audio in & out port	Mic & Headphone	Philips	SHM3300
2	USB port	HDD	Seagate	5VCA0X2F
3	SD Card port	SD Card	Kingston	4GB
4	HDMI port	Monitor	DELL	2709Wb
5	USB port	Mouse	Logitech	M-BP82





**Pre-test configuration**

Prior to taking the formal emissions data collected in this report many hours of pre-testing have been performed. The selection of the worst case system documented in this report was based upon this pre-testing.

Mode	CPU	LCD Panel	Memory	EMMC	WLAN	Camera	Battery	Adapter
1	Marvell PXA2128 (1.0GHz)	CHIMEI G075ADE-T01	1GB	4GB	QMI EM113-MV	SUYIN CM031B-SE01	BYD CL1	Bestec NA0241WAA
2	Marvell PXA2128 (1.2GHz)	CHIMEI G075ADE-T01	2GB	8GB	Liteon WCBN603MH	SUYIN CM0316-OLPC01	BYD CL1	Bastec BT-AG250SDF
3	Marvell PXA2128 (1.0GHz)	CHIMEI G075ADE-T01	2GB	4GB	QMI EM113-MV	FOXLINK FE03FF-317H	STL XO-1	Darfon BU24-1203
4	Marvell PXA2128 (1.2GHz)	CHIMEI G075ADE-T01	1GB	4GB	Liteon WCBN603MH	SUYIN CM0316-OLPC01	STL XO-1	Darfon BB0J-C
5	Marvell PXA2128 (1.0GHz)	CHIMEI G075ADE-T01	2GB	8GB	QMI EM113-MV	SUYIN CM031B-SE01	BYD CL1	Bastec BT-AG250SDF
6	Marvell PXA2128 (1.0Hz)	CHIMEI G075ADE-T01	1GB	8GB	Liteon WCBN603MH	FOXLINK FE03FF-317H	BYD CL1	Darfon BU24-1203
7	Marvell PXA2128 (1.0GHz)	CHIMEI G075ADE-T01	1GB	4GB	QMI EM113-MV	SUYIN CM031B-SE01	STL XO-1	Darfon BP24-1203
8	Marvell PXA2128 (1.2GHz)	CHIMEI G075ADE-T01	1GB	8GB	Liteon WCBN603MH	FOXLINK FE03FF-317H	BYD CL1	Bastec NA0241WAA
9	Marvell PXA2128 (1.0GHz)	CHIMEI G075ADE-T01	1GB	4GB	QMI EM113-MV	SUYIN CM0316-OLPC01	STL XO-1	Bastec NA0241WAA
10	Marvell PXA2128 (1.2GHz)	CHIMEI G075ADE-T01	2GB	4GB	Liteon WCBN603MH	SUYIN CM031B-SE01	BYD CL1	Darfon BP24-1203



**Worst Case for Final Testing (Mode 2 Chosen)**

Component	Vendor	Part Number
CPU	Marvell	PXA2128 (1.2GHz)
LCD Panel	CHIMEI	G075ADE-T01
Memory	Hynix	2GB
EMMC	Toshiba	8GB
WLAN	Liteon	WCBN603MH
Camera	SUYIN	CM0316-OLPC01
Battery	BYD	CL1
Power Adapter	Bestec	BT-AG250SDF

**2.1.7 Cable Description and Information**

Cable Type	Shielded	Ferrite	Length
HDMI Monitor	Yes	No	1.50m
USB Mouse	No	No	1.80m
USB 2.0 HDD	Yes	No	1.50m
Audio In	No	No	1.80m
Audio Out	No	No	1.80m



## 2.2 Measurement Equipment

N/A is an abbreviation for Not Applicable. All equipments are traceable to CNAS calibration standards.

### 2.2.1 Conducted Emissions

Description	Manufacturer	Model No.	Serial No.	Calibrated Until
Test Receiver	Rohde & Schwarz	ESCI	100167	5/18/2013
LISN	Schwarz beck	NSLK8127	8127433	5/18/2013
LISN	Schwarz beck	NSLK8128	8128229	5/18/2013
TLISN	TeseQ	CDN ST08A	30189	5/18/2013
TLISN	TeseQ	ISN ST800	29453	5/18/2013
TLISN	FCC	FCC-TLISN-T4-02	20581	5/18/2013
TLISN	FCC	FCC-TLISN-T8-02	20445	5/18/2013
Probe	FCC	F-33-4	57	5/18/2013
Probe	FCC	F35	507	5/18/2013

### 2.2.2 Radiated Emissions

Description	Manufacturer	Model No.	Serial No.	Calibrated Until
Test Receiver	Rohde & Schwarz	ESCI	100166	5/18/2013
Test Receiver	Rohde & Schwarz	ESIB26	100307	5/18/2013
Spectrum Analyzer	Agilent	E7405A	MY42000093	5/18/2013
Bilog Antenna	Schwarz beck	VULB9168	9168-195	7/01/2013
Bilog Antenna	Schwarz beck	VULB9168	9168-198	7/01/2013
Horn Antenna	Schwarz beck	BBHA 9120D	409	5/03/2013
Preamplifier	Agilent	8447D	2944A10848	5/18/2013
Preamplifier	Agilent	8447D	2944A10847	5/18/2013
Preamplifier	Agilent	8449B	3008A02145	5/18/2013
Preamplifier	Agilent	8449B	3008A02146	5/18/2013
Software	ADT	ADT_Radiated_V7	N/A	N/A
Antenna Mast	Inn-co	MA4000	MA4000/101/9770 405/L	N/A
Antenna Mast	Inn-co	MA4000	MA4000/104/9770 405/L	N/A
Turn Table	Inn-co	DT3000-1T-C	DT3000-1T-C/22	N/A
Controller	Inn-co	CO2000	CO2000/218/9770 405/L	N/A



## **Section3: Electromagnetic Emissions Test**

### **3.1 Emission**

#### **3.1.1 Line Conducted Emissions Test**

##### **- Measurement Procedures Utilized for Conducted Emissions**

The EUT was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per AS/NZS CISPR22.

Associated equipment, if needed, was placed as per AS/NZS CISPR22.

All I/O cables were positioned to simulate typical actual usage as per AS/NZS CISPR22.

The test equipment EUT installed received AC power through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.

All associated equipment received power from a second LISN.

For conducted emission test on telecommunication ports, a telecommunication port is connected by its signal cable to an impedance stabilization network (ISN). During the testing, the LAN utilization is in excess of 10 % and sustains that level for a minimum of 250 ms. the traffic rate is monitored by the program of Net Speed.

The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

During the above scans under battery charging mode, the emissions were maximized by cable manipulation.

The EUT configuration and cable configuration of the above highest emission level were recorded for reference of the final test.



**- Limits**

**For AC Power**

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**Note:**1) The lower limit shall apply at the transition frequencies.

- 2) The limit decreases in line with the logarithm of the frequency in the range of 0.15MHz to 0.50MHz.
- 3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

**For ISN**

**For Class A Equipment**

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	97 ~ 87	84 ~ 74	53 ~ 43	40 ~ 30
0.5 ~ 30.0	87	74	43	30

**Note:**1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

- 2) The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is  $20\log_{10}150=44\text{dB}$ ).

**For Class B Equipment**

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	84 ~ 74	74 ~ 64	40 ~ 30	30 ~ 20
0.5 - 30.0	74	64	30	20


**Note:** 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

- 2) The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is  $20\log_{10}150=44\text{dB}$ )




**- Test Setup**

**For AC power setup as below**

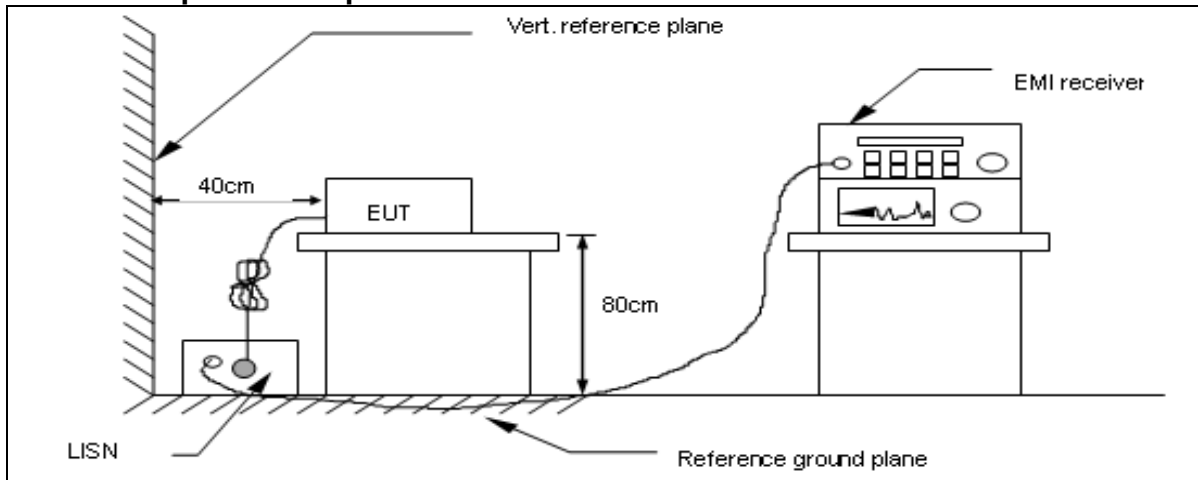

**For ISN setup as below**

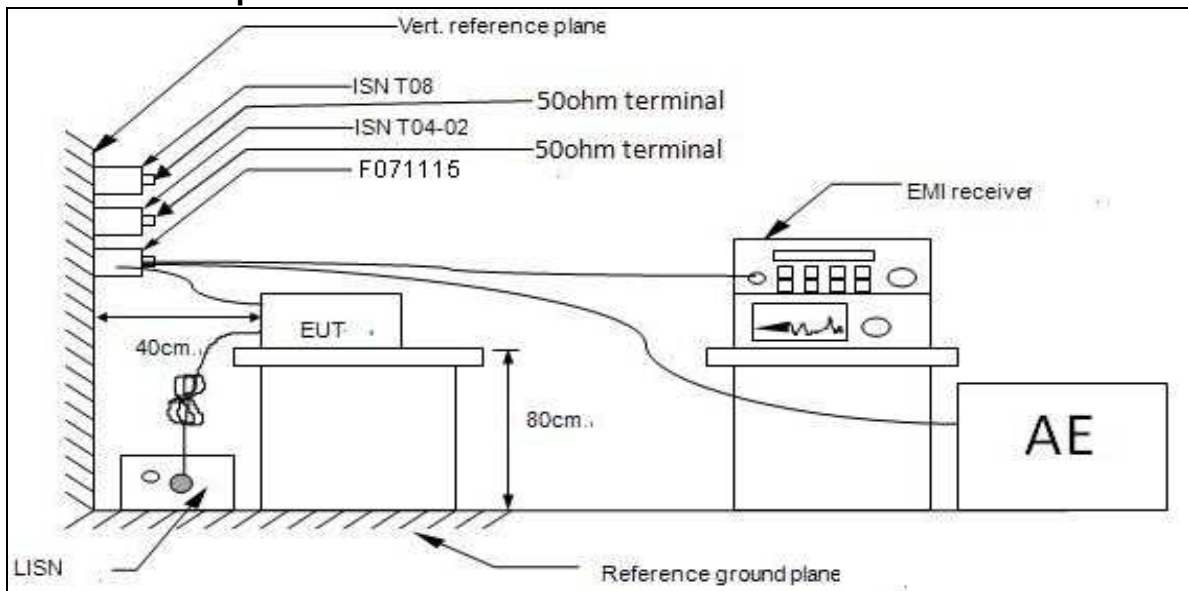


For the actual test configuration, please refer to the related item–Photographs of the Test Configuration.



**- Conducted Emissions Test Data**

Engineer : Xingming zhao	Location : Conduction Room
Limit : AS/NZS CISPR22 Class B	Probe : Line 1
EUT : Laptop Computer	Date : 2013-01-09
Power : AC 240V/50Hz	Detector : Quasi peak and Average
Temperature. : 22°C Relative Humidity.: 54% Atmospheric Pressure.: 101kpa	

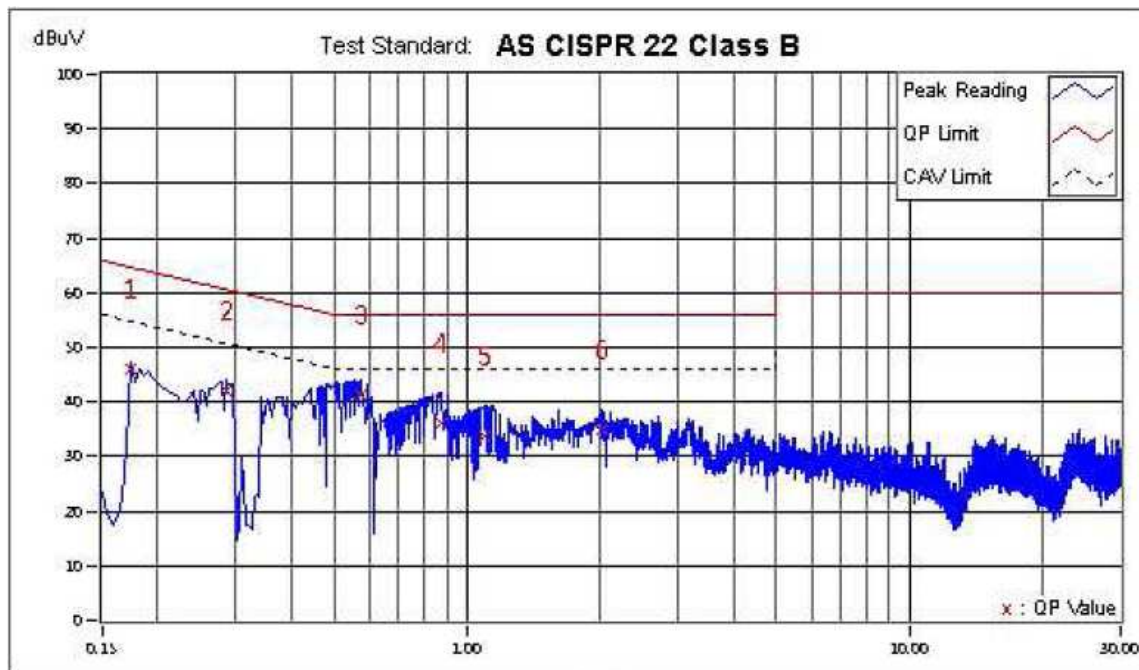


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB	
			QP	CAV	QP	CAV	QP	CAV	QP	CAV
1	0.17410	11.80	35.31	20.46	47.11	32.26	64.77	54.77	-17.66	-22.51
2	0.28609	11.00	31.56	19.53	42.56	30.53	60.64	50.64	-18.08	-20.11
+3	0.57407	10.56	30.57	15.30	41.13	25.86	56.00	46.00	-14.87	-20.14
4	0.87805	10.65	25.75	5.26	36.40	15.91	56.00	46.00	-19.60	-30.09
5	1.09403	10.62	23.24	3.10	33.86	13.72	56.00	46.00	-22.14	-32.28
6	2.00997	10.55	24.48	6.65	35.03	17.20	56.00	46.00	-20.97	-28.80

**Note:** 1) Conducted Emissions data was taken at 240Vac, 50Hz. This data was found to be equivalent or lower than the data listed above  
 2) Emission (dBuV) = Reading (dBuV) + Correction factor (dB)  
 Margins (dB) = Emission (dBuV) – Limit (dBuV)



Engineer : Xingming zhao	Location : Conduction Room
Limit : AS/NZS CISPR22 Class B	Probe : Line 2
EUT : Laptop Computer	Date : 2013-01-09
Power : AC 240V/50Hz	Detector : Quasi peak and Average
Temperature. : 22°C Relative Humidity.: 54% Atmospheric Pressure.: 101kpa	

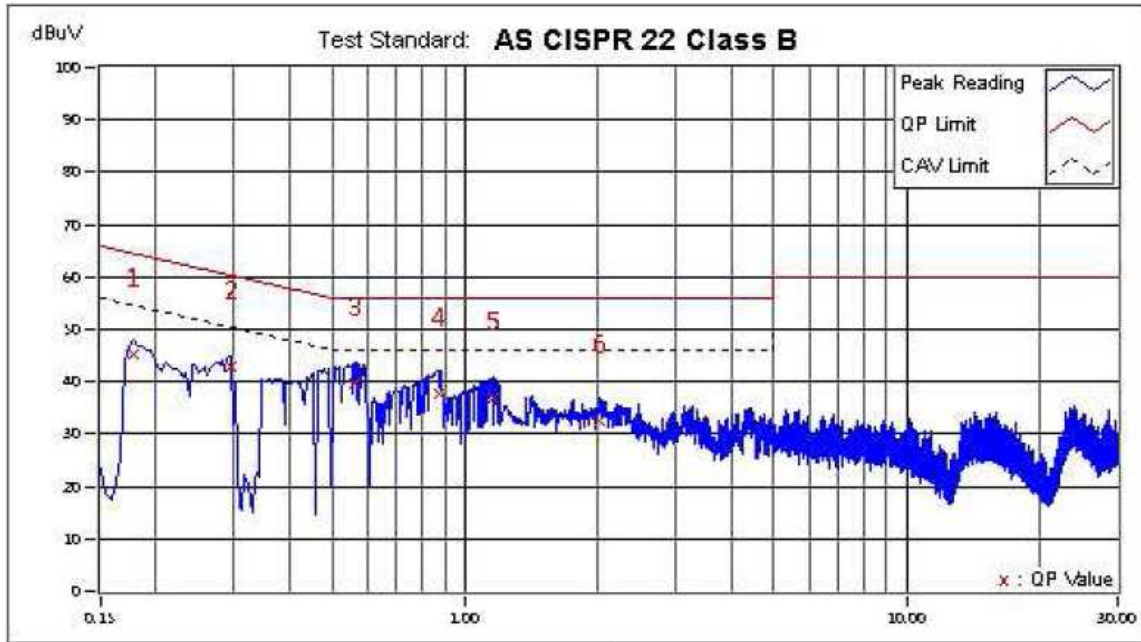

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB	
			QP	CAV	QP	CAV	QP	CAV	QP	CAV
1	0.17810	11.47	34.76	19.37	46.23	30.84	64.58	54.58	-18.35	-23.74
2	0.29409	10.78	32.11	19.31	42.89	30.09	60.41	50.41	-17.52	-20.32
+3	0.56207	10.51	29.18	8.97	39.69	19.48	56.00	46.00	-16.31	-26.52
4	0.87805	10.73	27.19	8.13	37.92	18.86	56.00	46.00	-18.08	-27.14
5	1.16203	10.70	26.30	8.06	37.00	18.76	56.00	46.00	-19.00	-27.24
6	2.02197	10.60	21.97	4.28	32.57	14.88	56.00	46.00	-23.43	-31.12

**Note:** 1) Conducted Emissions data was taken at 240Vac, 50Hz. This data was found to be equivalent or lower than the data listed above  
 2) Emission (dBuV) = Reading (dBuV) + Correction factor (dB)  
 Margins (dB) = Emission (dBuV) – Limit (dBuV)





### **3.1.2 Radiated Emissions Test**

#### **- Measurement Procedures Utilized for Radiated Emissions**

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane.

Associated equipment, if needed, was placed as per AS/NZS CISPR22.

All I/O cables were positioned to simulate typical usage as per AS/NZS CISPR22.

The EUT received AC power source, from the outlet socket under the turntable. All associated equipment received power from another socket under the turntable.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor. No extension cords shall be used to mains receptacle.

The antenna was placed at 10 meter away from the EUT as stated in AS/NZS CISPR22. The antenna connected to the Receiver via a cable and at times a pre-amplifier would be used.

The receiver scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned under battery charging mode and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both vertical and horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 2.1.6 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 2.1.6 producing the highest emission level.

The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.




**-Limits**

FREQUENCY (MHz)	dBuV/m	
	Class A	Class B
30 ~ 230	40	30
230 ~ 1000	47	37

**NOTE:** 1) The lower limit shall apply at the transition frequencies.  
2) Emission level (dBuV/m) = 20 log<sub>10</sub> Emission level (uV/m).

**-Test Setup**

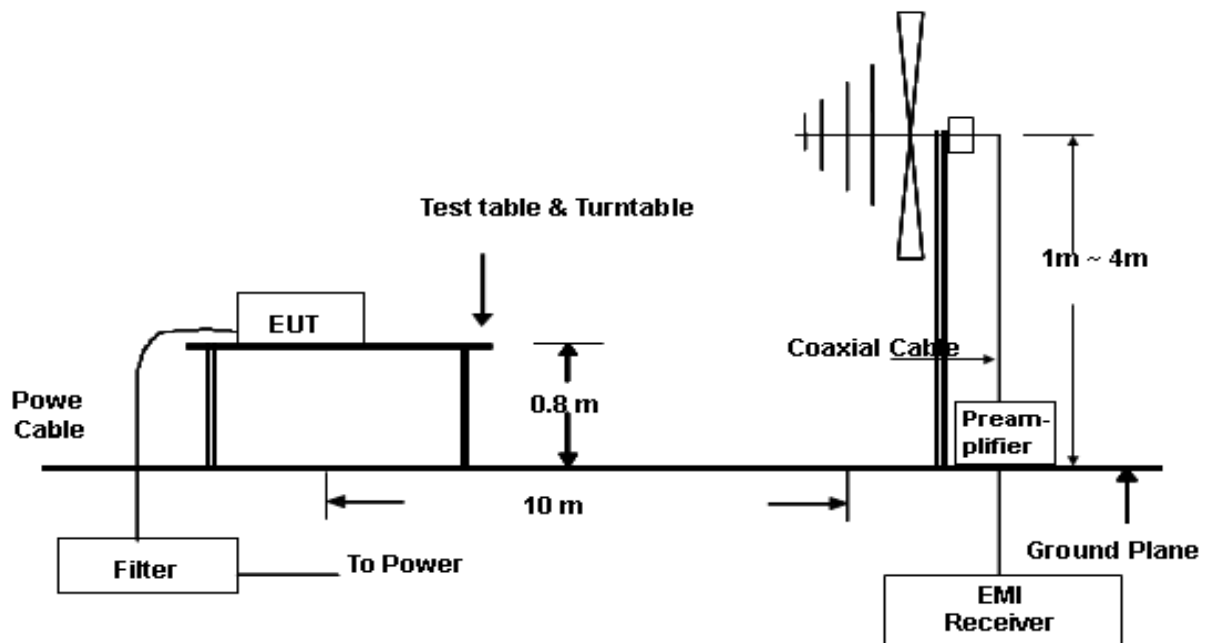


For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.



**- Radiated Emissions Test Data**

Engineer : Xingming zhao	Location : 10m Radiation Chamber
Limit : AS/NZS CISPR22 Class B	Polarity : Vertical
EUT : Laptop Computer	Date : 2013-01-10
Power : AC 240V/50Hz	Detector: Quasi peak
Temperature. : 18°C Relative Humidity.: 56% Atmospheric Pressure.: 101kpa	

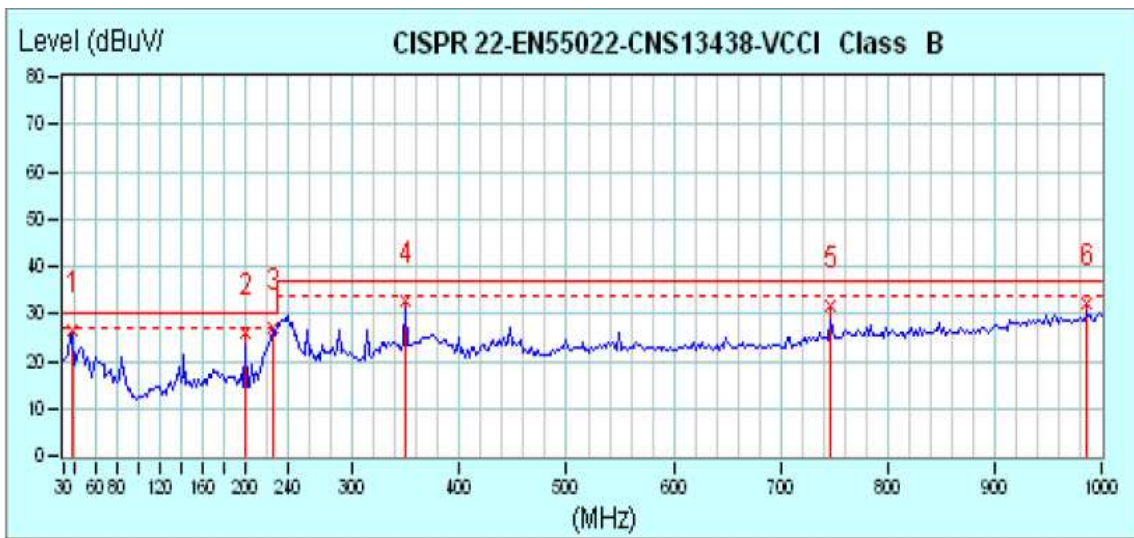

No.	Frequency MHz	Factor dB/m	Reading dBuV	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower / Table cm deg
1	37.73 (QP)	13.61	12.87	26.48	30.00	-3.52	142 327
2	199.09 (QP)	12.16	13.63	25.79	30.00	-4.21	169 23
*	226.30 (QP)	11.99	14.89	26.88	30.00	-3.12	102 11
4	348.78 (QP)	17.18	15.34	32.52	37.00	-4.48	159 277
5	747.32 (QP)	25.98	5.79	31.77	37.00	-5.23	166 235
6	986.44 (QP)	29.05	2.94	31.99	37.00	-5.01	106 338


**Note:** 1).Radiated Emissions data was taken at 240Vac, 50Hz. This data was found to be equivalent or lower than the data listed above.

2).Emission (dBuV) = Reading (dBuV) + Correction factor (dB)

Margins (dB) = Emission (dBuV) – Limit (dBuV)



Engineer : Xingming zhao	Location : 10m Radiation Chamber
Limit : AS/NZS CISPR22 Class B	Polarity: Horizontal
EUT : Laptop Computer	Date : 2013-01-10
Power : AC 240V/50Hz	Detector: Quasi peak
Temperature. : 18°C Relative Humidity.: 56% Atmospheric Pressure.: 101kpa	

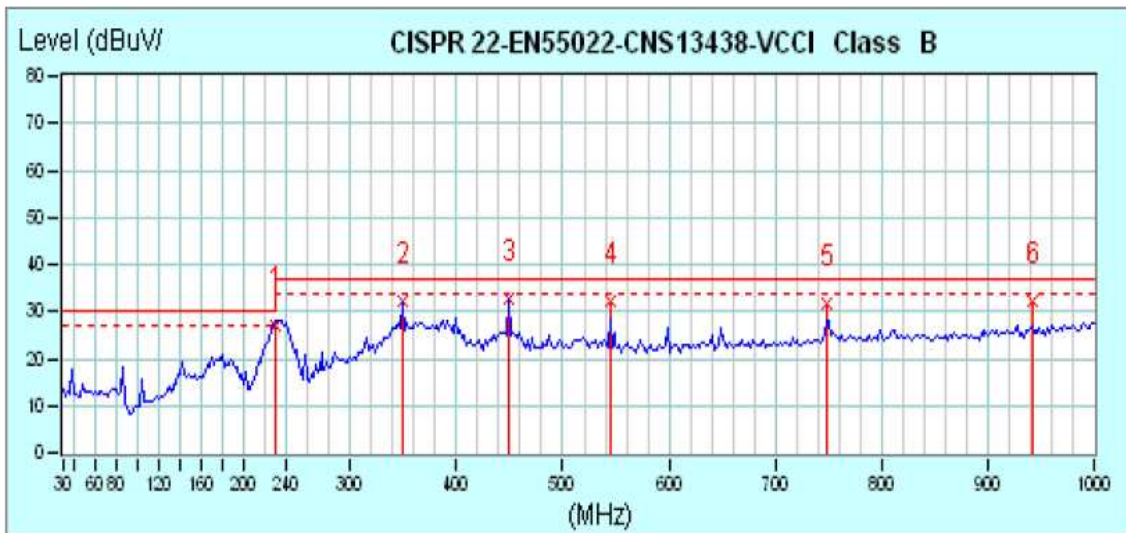

No.	Frequency MHz	Factor dB/m	Reading dBuV	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower / Table cm deg		
*	1	229.79 (QP)	12.10	14.74	26.84	30.00	-3.16	105	157
	2	350.08 (QP)	16.64	15.67	32.31	37.00	-4.69	215	127
	3	449.03 (QP)	19.63	13.08	32.71	37.00	-4.29	114	300
	4	544.10 (QP)	21.35	10.71	32.06	37.00	-4.94	198	316
	5	747.82 (QP)	25.43	6.25	31.68	37.00	-5.32	201	71
	6	941.84 (QP)	27.77	4.57	32.34	37.00	-4.66	156	102


**Note:** 1).Radiated Emissions data was taken at 240Vac, 50Hz. This data was found to be equivalent or lower than the data listed above.

2).Emission (dBuV) = Reading (dBuV) + Correction factor (dB)

Margins (dB) = Emission (dBuV) – Limit (dBuV)



Engineer : Xingming zhao	Location : 3m-2 Radiation Chamber
Limit : AS/NZS CISPR22 Class B	Polarity : Vertical
EUT : Laptop Computer	Date : 2013-01-12
Power : AC 240V/50Hz	Detector : Peak & Average
Temperature. : 20°C Relative Humidity.: 60% Atmospheric Pressure.: 101kpa	

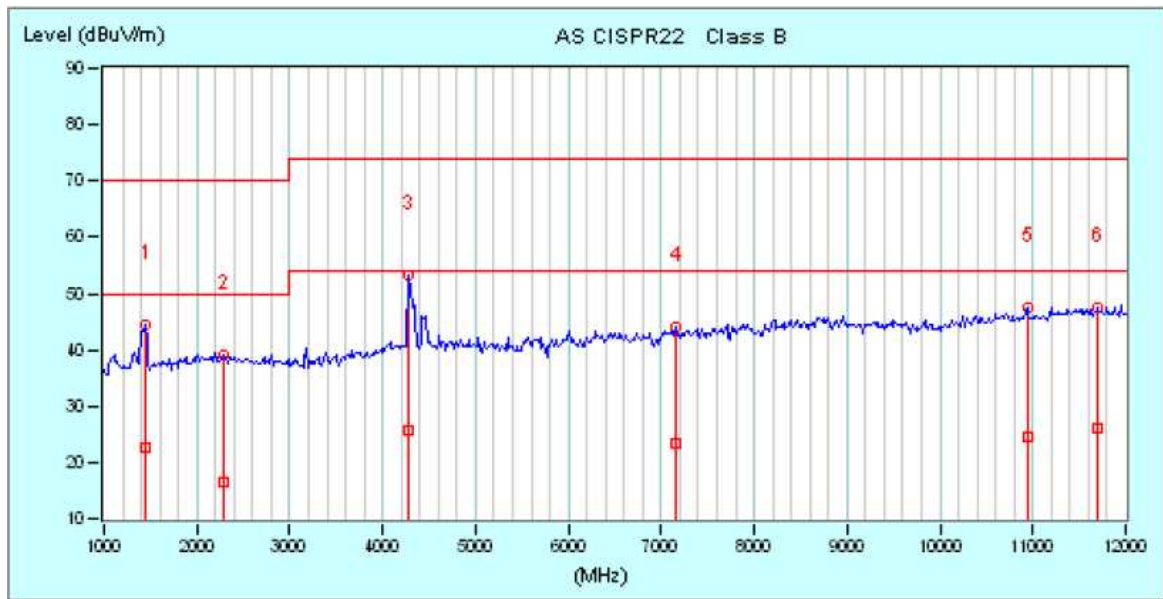

No.	Freq. MHz	C.F. dB/m	Reading		Emission		Limit		Margin		Ant./Table	
			PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
1	1440.00	27.51	17.06	-4.72	44.57	22.79	70.00	50.00	-25.43	-27.21	153	247
2	2283.33	29.34	9.71	-12.80	39.05	16.54	70.00	50.00	-30.95	-33.46	102	315
*	4281.67	35.03	18.27	-9.24	53.30	25.79	74.00	54.00	-20.70	-28.21	162	324
4	7160.00	42.81	1.40	-19.35	44.21	23.46	74.00	54.00	-29.79	-30.54	132	218
5	10936.67	46.81	0.65	-22.19	47.46	24.62	74.00	54.00	-26.54	-29.38	153	326
6	11706.67	51.58	-3.92	-25.60	47.66	25.98	74.00	54.00	-26.34	-28.02	146	263


**Note:** 1).Radiated Emissions data was taken at 240Vac, 50Hz. This data was found to be equivalent or lower than the data listed above.

2).Emission (dBuV) = Reading (dBuV) + Correction factor (dB)

Margins (dB) = Emission (dBuV) – Limit (dBuV)



Engineer : Xingming zhao	Location : 3m-2 Radiation Chamber
Limit : AS/NZS CISPR22 Class B	Polarity : Horizontal
EUT : Laptop Computer	Date : 2013-01-12
Power : AC 240V/50Hz	Detector: Peak & Average
Temperature. : 20°C Relative Humidity.: 60% Atmospheric Pressure.: 101kpa	

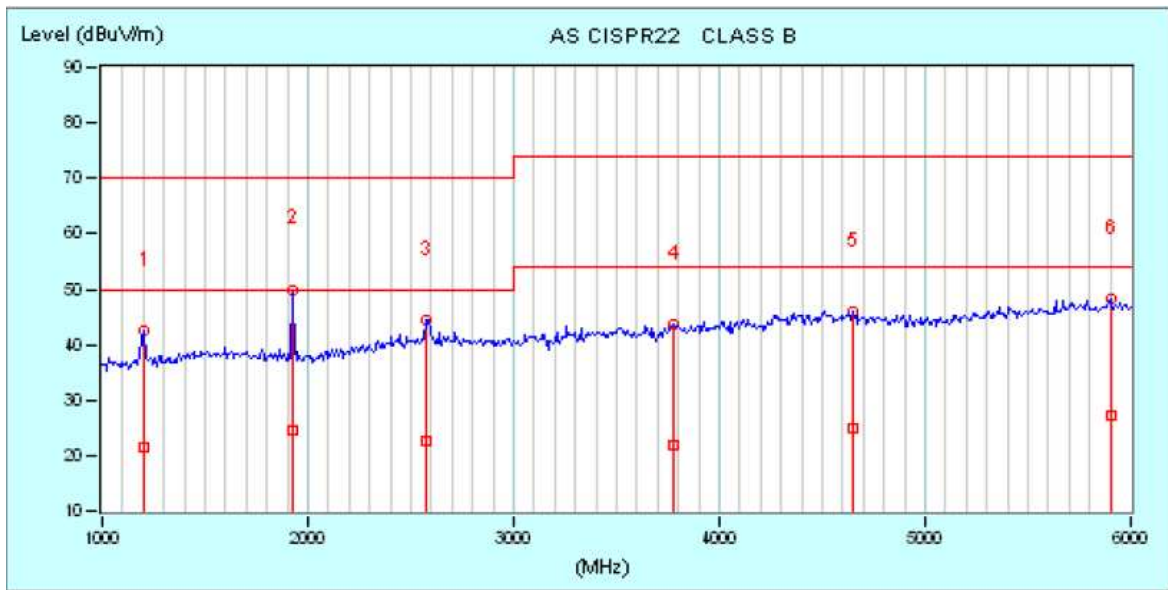


No.	Freq. MHz	C.F. dB/m	Reading		Emission		Limit		Margin		Ant./Table	
			PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
1	1200.00	26.54	15.90	-5.22	42.44	21.32	70.00	50.00	-27.56	-28.88	100	205
* 2	1925.00	27.91	22.08	-3.39	49.99	24.52	70.00	50.00	-20.01	-25.48	152	132
3	2575.00	30.81	13.71	-8.07	44.52	22.74	70.00	50.00	-25.48	-27.26	142	168
4	3775.00	33.06	10.45	-11.22	43.51	21.84	74.00	54.00	-30.49	-32.16	168	315
5	4650.00	34.69	11.33	-9.81	46.02	24.88	74.00	54.00	-27.98	-29.12	148	294
6	5900.00	37.07	11.05	-9.74	48.12	27.33	74.00	54.00	-25.88	-26.67	196	273

**Note:** 1). Radiated Emissions data was taken at 240Vac, 50Hz. This data was found to be equivalent or lower than the data listed above.  
 2). Emission (dBUV) = Reading (dBUV) + Correction factor (dB)  
 Margins (dB) = Emission (dBUV) – Limit (dBUV)



## Section 4: Test Arrangement Photos

### 4.1 Conducted Emissions (AC Power)

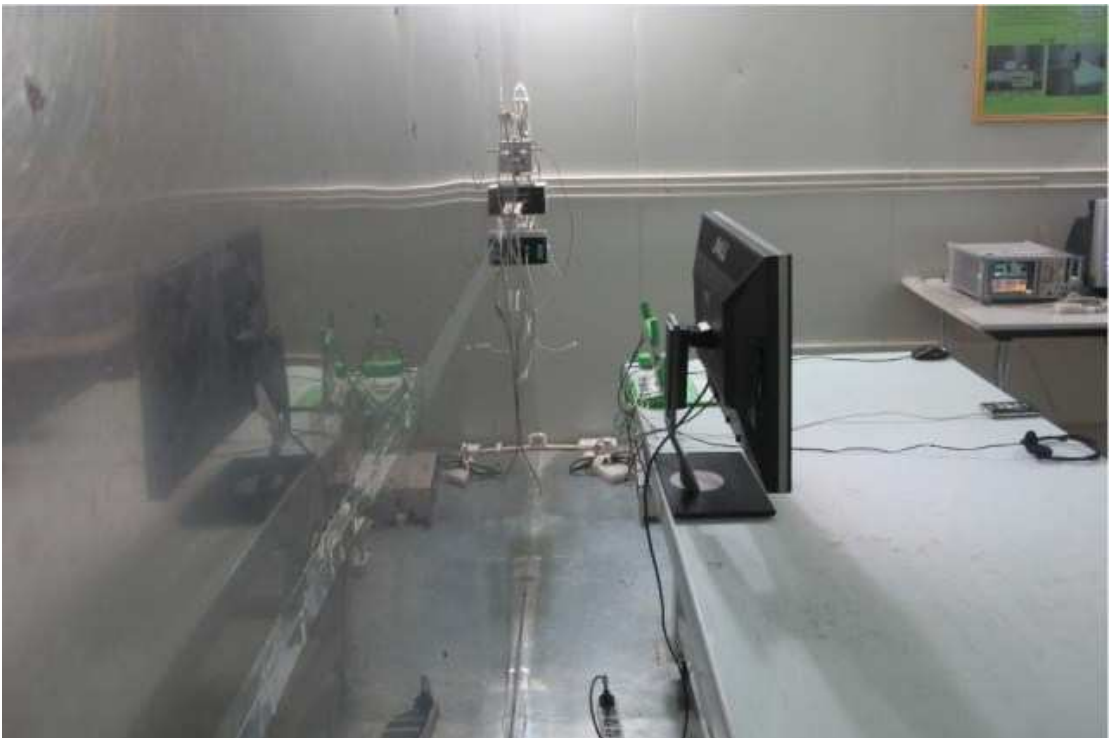



## 4.2 Radiated Emissions

