

GENERAL®



MOISTURE METERS

For Professional and Commercial Applications

www.generaltools.com/moisture

MM11



**Pin-Type LED Bar Graph
Moisture Meter w/Remote
Pin-Type Probe
MM70
page 4**



**Pin-Type LCD Moisture
Meter w/Remote
Pin-Type Probe
MM70D
page 4**



**Pin/Pinless LCD Moisture
Meter Kit w/ Remote Pin
Type Probe and Roller
Type Sensor
MM70D-7022KIT
page 5**



**Precision Digital & LED
Moisture Meter
MMD7003
page 5**



**Pin-Type LED Bar Graph
Moisture Meter
MM1E
page 8**



**Pin-Type LCD
Moisture Meter
MMD4E
page 8**



**Pinless LCD Moisture Meter
MMD5NP
page 9**



**4-in-1 Pin/Pad RH
Moisture Meter
MMH800
page 9**



**Pin/pinless Deep Sensing
Moisture Meter with
Remote Probe
MMD900
page 10**



**Pin/Pinless Deep Sensing
Moisture Meter with
Spherical Sensor and
Remote Probe
MMD950
page 10**



**Precision Digital Soil
Moisture Meter with Probe
DSMM500
page 11**



**General-Purpose
Moisture Meter
MM6012
page 11**



**Grain Moisture Meter
MMG608
page 11**

Our best-of-breed offerings. Choose pin or pinless, and LCD or LED display.



SPECIFICATIONS

| Model # | MM70 | MM70D | MM70D-7022KIT | MMD7003 |
|-------------------------------|--|--|---|--|
| Name | Pin Type LED Bar Graph Moisture Meter w/ Remote Pin Type Probe | Pin Type LCD Moisture Meter w/ Remote Pin Type Probe | Pin/Pinless LCD Moisture Meter Kit w/ Remote Pin Type Probe and Roller Type Sensor | Pin Type LCD and LED Bar Graph Moisture Meter |
| Display | LED Bargraph | Backlit LCD | Backlit LCD | Backlit LCD and LED Bargraph |
| Measurement Range | 5.5 to 99.9% Wood Moisture Equivalent (WME) | 5.5 to 99.9% Wood Moisture Equivalent (WME) | 5.5 to 99.9% Wood Moisture Equivalent (WME) | Wood: 6 to 40% Building Material: 0 to 100% |
| Pin or Pinless | Dual pin-type Optional: Roller type sensor | Dual pin-type Optional: Roller type sensor | Dual pin-type Includes: Roller type sensor | Pin-Type Optional: Remote pin-type probe |
| Depth of Measurement | Pin Length 1/2 in. (13mm) Remote probe: Pin Length 1/2 in. (13mm) Extra Pins included: Length 7/8 in. (23mm) | Pin Length 1/2 in. (13mm) Remote probe: Pin Length 1/2 in. (13mm) Extra Pins included: Length 7/8 in. (23mm) | Pin Length 1/2 in. (13mm) Remote probe: Pin Length 1/2 in. (13mm) Extra Pins included: Length 7/8 in. (23mm) Roller: Surface | Pin Length 0.44 in. (11mm) |
| Resolution | NA | 0.10% | 0.10% | 0.10% |
| Measurement Accuracy | ±1% at 77°F (25°C) | ±1% at 77°F (25°C) | ±1% at 77°F (25°C) | ± (5% of reading + 5 digits) @23 ±5°C |
| Data Hold | Yes | Yes | Yes | Yes |
| Material Selection Switch | Yes | Yes | Yes | Yes |
| Auto Calibration | Yes | Yes | Yes | Yes |
| Auto Temperature Compensation | Yes | Yes | Yes | - |
| Auto Power Off | Yes | Yes | Yes | Yes |
| Low Battery Indicator | Yes | Yes | Yes | Yes |
| Moisture Level Alarms | Yes | Yes | Yes | Yes |
| Protective Pin Cover | Yes | Yes | Yes | Yes |
| Extra Pins | Yes | Yes | Yes | Yes |
| Battery | 9V | 9V | 9V | 9V |
| Stored Readings | - | Yes, up to 99 readings, Min/Max/Avg recallable | Yes, up to 99 readings, Min/Max/Avg recallable | Min/Max |
| Warranty | 1 Year | 1 Year | 1 Year | 1 Year |
| Packaging | Box with Soft Pouch | Box with Soft Pouch | Protective Hard Case | Box with Soft Pouch |
| Includes | 9V battery, Extended pin-type probe 2 longer pins: 0.9 in. (23mm) Soft pouch, User's manual | 9V battery, Extended pin-type probe 2 longer pins: 0.9 in. (23mm) Soft pouch, User's manual | 9V battery, Extended pin-type probe 2 longer pins: 0.9 in. (23mm) Extended roller type probe Hard Case, User's manual | 9V battery, 10 extra pins Soft pouch, User's manual |

MM70

PIN-TYPE LED BAR GRAPH MOISTURE METER W/REMOTE PIN-TYPE PROBE

Precision instrument for making accurate moisture measurements in wood and timber.

Features:

- 1% Accuracy
- Multi-color LED bar graph readout
- Protective cap for safe carrying and operation
- Auto temperature compensation and calibration adjustment
- Stores/recalls up to 99 readings + Min/Max
- Ergonomic design, comfortable and durable
- Convertible to non-invasive measuring by adding optional MP7002 probe
- Audible alarm when preset exceeded
- Audible and visual low battery warning
- Additional set of long pins 0.9 in. (23mm) included
- CE and RoHS approved

Specifications:

- ♦ Measuring Range: 5.5 to 99.9% H₂O %WME
- ♦ Accuracy (at 25°C): ±1% Wood Scale
- ♦ Indicator: LED bar graph
- ♦ Color Codes: Green (<16%) Yellow/Red (>21%)
- ♦ Signal Output: 0 to 1 VDC (10mV/%WME)
- ♦ Calibration: Automatic Temperature Compensation
- ♦ Built-in Calibration Adjustment
- ♦ Power Source: 1 "9V" battery (included)

Includes:

- 1 MM70D Meter with two 0.5 in. (12.7mm) pins
- 1 MP7021 External Pin-Type Probe 39 in. (1m) long with 0.5 in. (12.7mm) pins
- Additional Set of Interchangeable Long Pins 0.9 in. (23mm)
- Protective Fabric Carrying Case
- Battery
- User's manual

UPC

NO.

| | |
|---------|---|
| 07020 8 | MM70 |
| 70604 6 | MP7021 External Pin-Type Probe 39 in. (1 meter) long |
| 07070 3 | MP7022 External Roller-Type Probe 39 in. (1 meter) long (optional) |

MM70D

PIN-TYPE LCD MOISTURE METER W/REMOTE PIN-TYPE PROBE

Precision digital instrument for making accurate moisture measurements in wood and timber.

Features:

- 1% Accuracy
- Digital LCD display with luminescent back-light
- Protective cap for safe carrying and operation
- Hardened gloss treatment on display-window for an abrasion-proof long-term clean lens
- 5.5% to 99.9% measurement range with 0 to 1 VDC output
- Stores/recalls up to 99 readings + Min/Max
- Auto temperature compensation and internal calibration
- Auto power off
- Ergonomic design, comfortable and durable
- Audible and visual low battery warning
- Interchangeable extension probe
- Additional set of long pins 0.9 in. (23mm) included
- CE and RoHS approved

Specifications:

- ♦ Measuring Range: 5.5 ~ 99.9% H₂O % WME
- ♦ Resolution: 0.1%
- ♦ Accuracy (at 25°C): ±1% Wood scale
- ♦ Display: Digital dual LCD display, with multi-function indicator
- ♦ Sampling Rate: 0.3 seconds
- ♦ Wood Group Scales: Select from 8 wood species groups
- ♦ Data Memory: 99 readings
- ♦ Signal Output: 0 to 1 VDC (10mV/%WME)
- ♦ Calibration: Built-in calibration adjustment
- ♦ Battery Longevity: About 250 hours of continued use with backlight off
- ♦ Operating Temperature: -4° to 131°F (-20° to 55°C) @ <80% RH
- ♦ Dimensions: 6.0 x 2.2 x 1.26 in. (153 x 56 x 32mm)
- ♦ Weight: 5.5 oz. (155g) including battery
- ♦ Power Source: 1 "9V" battery (included)

Includes:

- 1 MM70D Meter with two 0.5 in. (12.7mm) pins
- 1 MP7021 External Pin-Type Probe 39 in. (1m) long with 0.5 in. (12.7mm) pins
- Additional Set of Interchangeable Long Pins 0.9 in. (23mm)
- Protective Fabric Carrying Case
- Battery • User's manual

UPC

NO.

| | |
|---------|---|
| 07010 9 | MM70D |
| 70604 6 | MP7021 External Pin-Type Probe 39 in. (1 meter) long |
| 07070 3 | MP7022 External Roller-Type Probe 39 in. (1 meter) long (optional) |

CE
RoHS



MM70

CE
RoHS



MM70D



MM70D - 7022 KIT

PIN/PINLESS LCD MOISTURE METER KIT W/ REMOTE PIN TYPE PROBE AND ROLLER TYPE SENSOR

Precision digital moisture meter for highly accurate readings in wood, timber and many other materials.

Features:

- Digital LCD display with luminescent back-light
- Protective cap for safe carrying and operation
- Hardened gloss treatment on display-window for an abrasion-proof long-term clean lens
- 5.5% to 99.9% measurement range with 0 to 1 VDC output
- Stores/recalls up to 99 readings + Min/Max
- Auto temperature compensation and internal calibration
- Auto power off
- Ergonomic design, comfortable and durable
- Audible and visual low battery warning
- Interchangeable extension probes
- CE and RoHS approved

Specifications:

- ♦ Measuring Range: 5.5 to 99.9% H₂O% WME
- ♦ Resolution: 0.1%
- ♦ Accuracy: (at 25°C) ±1% Wood scale
- ♦ Display: Digital dual LCD display, with multi-function indicator
- ♦ Sampling Rate: 0.3 seconds
- ♦ Wood Group Scales: Select from 8 wood species groups
- ♦ Data Memory: 99 readings
- ♦ Signal Output: 0 to 1 VDC (10mV/%WME)
- ♦ Calibration: Built-in calibration adjustment
- ♦ Battery Longevity: About 250 hours of continued use with backlight off
- ♦ Operating Temperature: -4° to 131°F (-20° to 55°C) @<90% RH
- ♦ Dimensions: 6.0 x 2.2 x 1.26 in. (153 x 56 x 32mm)
- ♦ Weight: 5.5 oz. (155g) including battery
- ♦ Power Source: 1 "9V" battery (included)



MM70D-7022KIT



MM7003

PRECISION DIGITAL & LED MOISTURE METER

Use to measure moisture content in wood, timber and concrete.

Features:

- Two displays: Red LED bar graph and LCD digital display
- Optional remote probe available
- Replaceable pins
- Min/Max memory + data hold
- Data Hold feature freezes displayed reading
- Heavy-duty housing
- Built-in low battery indicator
- Dimensions: 8.4 x 2.7 1.2 in. (216.5 x 68.5 x 29.7mm)
- Weight: 8.8 oz. (251g)

Specifications:

- ♦ Two measurement ranges: 0 to 100% for concrete and non-wood materials, 6 to 40% moisture for wood
- ♦ Measurement Accuracy: ± (5% of reading + 5 digits)
- ♦ Power Source: 1 "9V" battery (not included)

Includes:

- Extra pins
- Protective cover
- User's manual

UPC

07003 1
01255 0


NO.

MMD7003
MP7003 External Pin-Type Probe (optional)



Affordable, Versatile, and High-Tech!

We're especially excited about our new MMD950, with its "magic" sphere that can actually sense moisture 4 inches below a hard surface. This instrument and its siblings demonstrate that when it comes to construction materials like wood, concrete and wall board, General has the right moisture measurement tool for you.



SPECIFICATIONS

| Model # Name | MM1E Pin-Type LED Bar Graph Moisture Meter | MMD4E Pin-Type LCD Moisture Meter | |
|----------------------------------|---|---|--|
| Display | 10 LED bargraph | 99.9 count LCD with 0.4 in. (10mm) high digits | |
| Measurement Range | 7 to 35% on two scales (7 to 15%, and 16 to 35%) | 8 to 30% | |
| Pin Length/ Measurement Depth | 3/8 in. (10mm) | 3/8 in. (10mm) | |
| Resolution | - | 0.1% | |
| Measurement Accuracy | ±1 LED (~1%) | ±3% | |
| Temperature Range/ Accuracy | - | - | |
| Humidity Range/ Accuracy | - | - | |
| Data Hold | - | Yes | |
| Material Selection Switch | - | Yes | |
| Auto Calibration | - | Yes | |
| Auto Temperature Compensation | Yes | Yes | |
| Auto Power Off | - | Yes | |
| Low Battery Indicator | - | Yes | |
| Moisture Level Alarms | - | Yes | |
| Protective Pin Cover | Yes | Yes | |
| Extra Pins | Optional | Optional | |
| Battery | (1) 9V | (1) 9V | |
| Warranty | 1 Year | 1 Year | |
| Packaging | Blister Packed | Blister Packed | |
| Includes | 9V battery, User's manual | 9V battery, User's manual | |



| | MMD5NP Pinless LCD Moisture Meter | MMH800 4-in-1 Pin/Pad RH Moisture Meter | MMD900 Pin/Pinless Deep Sensing Moisture Meter w/Remote Probe | MMD950 Pin/Pinless Deep Sensing Moisture Meter w/Spherical Sensor and Remote Probe |
|--|--|--|---|---|
| | 99.9 count LCD with 0.4 in. (10mm) high digits | Two backlit LCDs | 0 to 99.9 count Backlit LCD + 40-dot tri-color LED bar graph | 0 to 99.9 count Backlit LCD + 40-dot tri-color LED bar graph |
| | 0 to 99.9% WME (Wood Moisture Equivalent) for wood; 0 to 56.5% for building materials | 5 to 50% WME for wood; 1.5 to 33% for building materials | 0 to 99.9% WME or 0 to 99.9 REL (relative measurement) | 0 to 99.9% WME or 0 to 99.9 REL (relative measurement) |
| | 3/4 in. (20mm) | 3/16 in. (5mm) | 3/8 in. (10 mm) for instrument pins; 3/16 in. (5mm) for remote probe pins; 2 in. in pinless mode | 3/4 in. (20mm) Remote Probe 3/16 in. (5mm) Pinless 4 in. (102mm) |
| | 0.1% | 0.1% | ±0.10% for LCD, ±1 dot for LED bar graph | ±0.1% for LCD, ±1 dot for LED bar graph |
| | ±3% | ±3% | Pin mode: ±5% of reading + 5 digits Pinless mode: Relative reading | Pin mode: ±5% of reading + 5 digits Pinless mode: Relative reading |
| | - | 32° to 140°F (0° to 60°C) ±2°F (±2°C) | - | - |
| | - | 25 to 95% ±3% from 0° to 40°C | - | - |
| | Yes | Yes | Yes | Yes |
| | Yes | Yes | Yes | Yes |
| | Yes | Yes | Yes | Yes |
| | Yes | - | - | - |
| | Yes | Yes | Yes | Yes |
| | Yes | Yes | Yes | Yes |
| | Yes | Yes | Yes | Yes |
| | Yes | Yes | Yes | Yes |
| | N/A | Optional | Optional | Optional |
| | (1) 9V | (1) 9V | (1) 9V | (1) 9V |
| | 1 Year | 1 Year | 1 Year | 1 Year |
| | Blister Packed | Protective Hard Case | Protective Hard Case | Protective Hard Case |
| | 9V battery, User's manual | 9V battery, Remote probe, Hard Case, User's manual | 9V battery, Remote probe, Hard Case, User's manual | 9V battery, Remote probe, Hard Case, User's manual |



MM1E

MM1E

PIN-TYPE LED BAR GRAPH MOISTURE METER

Ideal for use in woodworking, building construction and home inspection. Examples include:

- Checking for moisture in carpets and sub-flooring
- Checking wood, drywall and concrete before painting/wallpapering, sealing or treating
- Locating water leaks in roofs, floors and walls

Features:

- 10-LED display
- Two measurement ranges: 7 to 15% and 16 to 35%
- Protective cap doubles as calibration checker
- Full and low battery indications
- CE and RoHS approved

Specifications:

- ♦ Low Measurement Range: 7 to 15% WME (Wood Moisture Equivalent)
- ♦ High Measurement Range: 16 to 35% WME
- ♦ Measurement Accuracy: ± 1 LED ($\sim 1\%$)
- ♦ Calibration Check Point: 21% $\pm 1\%$
- ♦ Low Battery Level: $< 7.5V$
- ♦ Current Consumption: $< 15mA$
- ♦ Operating Temperature: 32° to $140^\circ F$ (0° to $60^\circ C$)
- ♦ Dimensions: 6.5 x 2.7 x 1 in. (164 x 69 x 26mm)
- ♦ Weight: 3.2 oz. (91g) w/out battery
- ♦ Power Source: 1 "9V" battery (included)

Features:

- Protective cap
- Battery
- User's manual

| UPC | NO. |
|---------|------|
| 10188 9 | MM1E |



MMD4E

PIN-TYPE LCD MOISTURE METER

Ideal for use in woodworking, building construction, home inspection, lumber selection, water-damage restoration.

Features:

- 99.9 count LCD w/0.4 in. high digits
- Wood/building materials selection switch
- Low, Medium and High moisture sounds and on-screen icons
- High accuracy and resolution
- Data hold + auto power off + low battery indicator
- Replaceable stainless steel pins (#PIND4E)
- Powered by "9V" battery (included)

Specifications:

- ♦ Overall Moisture Measurement Range: 5 to 50% for wood, 1.5 to 33% for building materials
- ♦ Wood Moisture Scales: 5 to 11.9% (low); 12 to 15.9% (medium); 16 to 50% (high)
- ♦ Building Materials Scales: 1.5 to 16.9% (low); 17 to 19.9% (medium); 20 to 33% (high)
- ♦ Measurement Accuracy: $\pm 3\%$ of reading
- ♦ Measurement Resolution: $\pm 0.1\%$
- ♦ Low Battery Level: $< 7.5V$
- ♦ Auto Power Off Trigger: 3 minutes of inactivity
- ♦ Current Consumption: $< 15mA$
- ♦ Power Source: 1 "9V" battery (included)

Includes:

- Protective cap
- Battery
- User's manual

| UPC | NO. |
|---------|-------------------------|
| 41447 7 | MMD4E |
| 01499 8 | PIND4E Replacement pins |



MMD4E



MMD5NP

PINLESS LCD MOISTURE METER

Ideal for measuring moisture content of wood and other construction materials.

Features:

- Non-invasive measurement technique
- Jumbo display
- Wide measurement range
- Intuitive on-screen icons: Low/Medium/High moisture content; wood/concrete mode
- Hold function
- Audible peak reading alert
- Auto-calibrating
- Auto Power Off
- Low and very low battery warnings

Specifications:

- ♦ Measurement Ranges: 0 to 99.9% WME (Wood Moisture Equivalent) for wood; 0 to 56.5% for building materials
- ♦ Measurement Accuracy/Resolution: $\pm 3\%/0.1\%$
- ♦ Measuring Depth: 3/4 in. (20mm)

- ♦ Display Type/Size: 99.9 count LCD with 0.4 in. (10mm) high digits
- ♦ Auto Power Off Trigger: 3 to 4 minutes with 0% reading
- ♦ Low/Very Low Battery Warning Triggers: $<7.5V/<6.5V$
- ♦ Operating Temperature: 32° to $122^{\circ}F$ (0° to $50^{\circ}C$)
- ♦ Operating Relative Humidity: $<80\%$
- ♦ Power Source: 1 "9V" battery (included)

Includes:

- Battery
- User's manual

| UPC | NO. |
|---------|--------|
| 40142 2 | MMD5NP |



MMD5NP

CE
RoHS

MMH800

4-IN-1 PIN/PAD RH MOISTURE METER

Ideal for locating water leaks and measuring moisture content of lumber, unfinished wood, drywall, plastered walls, carpeting, floors and subfloors, brick, grout, soil, paper or powders. Also measures ambient temperature and humidity.

Features:

- Pin-type and flat surface (non-intrusive dual pad) sensors
- Two dedicated displays: Moisture percentage, and ambient temperature plus relative humidity
- High accuracy and repeatability
- High/medium/low audible indication of moisture level
- Holds moisture level readings for convenient viewing later
- Auto diagnostic check
- Auto power off

Includes:

- Battery
- User's manual

Specifications:

- ♦ Measurement Ranges: 5 to 50% moisture (wood); 1.5 to 33% moisture (building materials)
- ♦ Moisture Measurement Accuracy: $\pm 3\%$
- ♦ Moisture Measurement Resolution: 0.1%
- ♦ Pin Length: 3/16 in. (5mm)
- ♦ Temperature Measurement Range/Accuracy: 32° to $140^{\circ}F$ (0° to $60^{\circ}C$)/ $\pm 2^{\circ}F$ ($\pm 2^{\circ}C$)
- ♦ Humidity Measurement Range/Accuracy: 25 to 95%/ $\pm 3\%$ from 0° to $40^{\circ}C$
- ♦ Auto Power Off: After 3 minutes of inactivity
- ♦ Storage Temperature: 23° to $140^{\circ}F$ (-5° to $60^{\circ}C$)
- ♦ Storage Humidity: 80% max
- ♦ Dimensions: 7.13 x 2.17 x 1.57 in. (181 x 55 x 40mm)
- ♦ Weight: 4.06 oz. (115g)
- ♦ Power Source: 1 "9V" battery (included)

| UPC | NO. |
|---------|--------|
| 01486 8 | MMH800 |



MMH800



MM900

PIN/PINLESS DEEP SENSING MOISTURE METER WITH REMOTE PROBE

Ideal for contractors, woodworkers and homeowners to find leaks and to measure the moisture content of wood and other construction materials.

Features:

- Two measurement modes: Pin (%WME) and pinless (REL)
 - Pinless measuring up to 2 in. deep via sensor on back of meter
 - Dual displays: Jumbo LCD and 40-dot LED bar graph
 - Jack for included remote pin-type probe
 - Protective cover doubles as calibration checker
- Spare pins compartment
- Replaceable stainless steel pins
- Auto zero calibration
 - Data hold function
 - User can turn beep sound, backlight and auto power off function on or off

- ♦ LCD Digit Height: 0.9 in. (22.9mm)
- ♦ LCD Resolution: 0.1%
- ♦ LED Bar graph Composition/Colors: 40 dots/green, red, yellow
- ♦ Operating Current: 70 mADC max
- ♦ Operating Temperature: 32° to 122°F (0° to 50°C)
- ♦ Operating Relative Humidity: 80% max
- ♦ Dimensions: 9 x 2.75 x 1.625 in. (229 x 70 x 41mm)
- ♦ Weight: 8 oz. (249g)
- ♦ Power Source: 1 "9V" battery (included)

Includes:

- Remote probe
- Battery
- Hard carrying case
- User's manual

Specifications:

- ♦ Measurement Range: 0 to 99.9% WME (Wood Moisture Equivalent) or REL
- ♦ Measurement Accuracy: ±5% of reading +5 digits
- ♦ Pin Length/Type: 3/16 in. (4.76mm) stainless steel
- ♦ External Probe Cable Length: 46 in. (1.168m)
- ♦ Pinless Measuring Depth: 2 in. (50.8mm)

| UPC | NO. |
|---------|-------|
| 01485 1 | MM900 |



MMD950

PIN/PINLESS DEEP SENSING MOISTURE METER WITH SPHERICAL SENSOR AND REMOTE PROBE

Ideal for contractors, woodworkers and homeowners to measure the moisture content of wood and other construction materials.

Features:

- Two measurement modes: Pin and pinless
- Pin mode uses replaceable pins at end of 46 in. cable; pinless mode uses integral ball sensor with 4 in. measurement depth
 - Displays % WME or relative readings simultaneously on two displays: 0 to 99.9 count jumbo LCD, and 40-dot tri-color LED bar graph
- Auto-calibrating
- Data hold function
- User can turn beep sound, backlight and auto power off function on or off
 - Low battery warning
 - Spare pins storage compartment

Specifications:

- Measurement Range: 0 to 99.9% WME (Wood Moisture Equivalent) or REL
- ♦ Measurement Accuracy: ±(5% of reading +5 digits)
- ♦ Pin Length/Type: 3/16 in. (4.76mm) Stainless Steel
- ♦ External Probe Cable Length: 46 in. (1.168m)
- ♦ Pinless Ball Sensor Measurement Depth: 4 in. (10.16cm)
- ♦ Ball Sensor Diameter: 1 in. (22.9mm)
- ♦ LCD Digit Height: 0.9 in. (22.9mm)
- ♦ LCD Resolution: 0.1%
- ♦ LED Bar Graph Composition/Colors: 40 dots/green, red, yellow
- ♦ Operating Current: 70 mADC max
- ♦ Operating Temperature: 32° to 122°F (0° to 50°C)
- ♦ Operating Relative Humidity: 80% max
- ♦ Dimensions: 9 x 2.75 x 1.625 in. (229 x 70 x 41mm)
- ♦ Weight (w/battery): 8 oz. (249g)
- ♦ Power Source: 1 "9V" battery

Includes:

- Remote probe
- Battery
- User's manual

| UPC | NO. |
|---------|--------|
| 01505 6 | MMD950 |



MM900



MMD950

DSMM500

PRECISION DIGITAL SOIL MOISTURE METER WITH PROBE

Ideal for commercial, agricultural and professional use

Features:

- Designed to measure moisture content of soil
- Heavy-duty probe
- Min/Max memory
- IP-65 water resistance
- CE and RoHS approved

Specifications:

- ◆ Range: 0-50% Moisture Content
- ◆ Probe Length: 8 in. (203mm)
- ◆ Power Source: 4 "AAA" batteries (not included)

| UPC | NO. |
|---------|---------|
| 01240 6 | DSMM500 |



DSMM500



MM6012

GENERAL-PURPOSE MOISTURE METER

Ideal for measuring moisture content of a wide variety of materials, including wood fiber, wood products, tobacco, cotton and paper.

Features:

- Large 4-digit LCD display
- Data hold function
- Compact, lightweight and easy to use
- Also measures ambient temperature

Specifications:

- ◆ Moisture Measurement Range: 0 to 50%
- ◆ Moisture Measurement Accuracy: $\pm 0.5\%$ of reading
- ◆ Temperature Measurement Range: 14° to 150°F (-10° to 65°C)
- ◆ Temperature Measurement Accuracy: $\pm 1^\circ\text{F}$ (0.8°C)
- ◆ Display Digit Height: 0.4 in. (10mm)
- ◆ Cord Length: 3.5 ft. (1.07m)
- ◆ Probe Length: 6 in. (152mm)
- ◆ Operating Temperature: 32° to 122°F (0° to 50°C) @ <85% RH

Dimensions:

7 x 2.7 x 1.5 in. (178 x 68 x 39mm)

◆ Weight (without batteries or probe): 6.7 oz. (190g)

◆ Power Source: 4 "AA" batteries (not included)

Includes:

- Hard case
- User's manual

| UPC | NO. |
|---------|--------|
| 10195 7 | MM6012 |



MM6012

MMG608

GRAIN MOISTURE METER

Ideal for use in grain storage and other industrial settings.

Features:

- Also measures temperature
- Large 4-digit LCD
- Red LED bar graph augments LCD
- Min/Max memory + data hold
- Rugged construction
- Lightweight

Includes:

- Protective hard case
- Steel probe with dual 1 ft. needles and 4 ft. cord
- Operating instructions


| UPC | NO. |
|---------|--------|
| 10197 1 | MMG608 |

Specifications:

- ◆ Moisture Measurement Range: 8 to 20%
- ◆ Moisture Measurement Accuracy: $\pm 1\%$ of reading
- ◆ Temperature Measurement Range: 14° to 131°F (-10° to 55°C)
- ◆ Temperature Measurement Accuracy: $\pm 1^\circ\text{F}$ (0.8°C)
- ◆ Display Digit Height: 0.4 in. (10mm)

- ◆ Cord Length: 4 ft. (1.22m)
- ◆ Probe Length: 1 ft. (305mm)
- ◆ Operating Temperature: 32° to 122°F (0° to 50°C) @ <85% RH
- ◆ Dimensions: 7 x 2.7 x 1.5 in. (178 x 68 x 39mm)
- ◆ Weight (without batteries or probe): 9 oz. (280g)
- ◆ Power Source: 4 "AA" batteries (not included)

MMG608

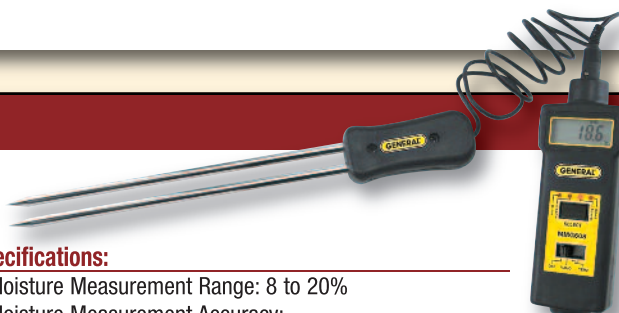



GENERAL TOOLS & INSTRUMENTS • 80 White Street, New York, NY 10013-3567
PHONE (212) 431-6100 • FAX (212) 431-6499 • TOLL FREE (800) 697-8665
e-mail: gentools@generaltools.com
www.generaltools.com

MM11 Effective May 2011

©2011 GENERAL TOOLS & INSTRUMENTS 5/11
Not responsible for typographical errors.

