

SPECIAL FEATURES

- Wireless 2.4 GHz laser mini mouse in sporty design
- Dramatically metallic-red coating with matt black, noticeably gentle *SoftSkin* coating on both sides
- Ergonomic compact universal construction for right and left handers with 3 keys functionality (incl. 4 ways scroll wheel)
- Far-ranging & reliable radio-frequency transmission at 2.4 GHz up to max. 10 m away from the PC
- Excellent precision and speed – 30x exacter than optical standard mice
- 1600 dpi laser sensor with shift key between 1200 dpi and 800 dpi during operation (*on the fly*)
- Multicoloured LED in the middle button indicating the set dpi resolution, low battery capacity as well as the synchronisation process
- Practical transport clip for the super mini USB receiver – in locked position the battery is switched off simultaneously
- Plug & Play* installation without any special driver
- Exclusive gift box as appealing retail packaging
- Optimal for mobile use respectively for office and home users with a preference for a minimal overall size




TECHNICAL DATA

Mouse buttons:	2x Mouse function keys 1x Four ways scroll wheel 1x dpi shift key 1x synchronisation button	(Life expectancy >3 million clicks) (Clicking on pressure as well as up, down, left, right function) (incl. LED: green = dpi / red = Battery low indication) (for new synchronisation with the USB adapter)
Mouse sensor / Wave length:	Pixart PAW3603/PAN3603	830 – 860 nm
Sensor resolution:	1600 dpi / 1200 dpi / 800 dpi	Resolution selectable via shift key <i>on the fly</i> dpi indication by green LED: on / low / off - for every 10 s
Acceleration / Speed / Scanning rate:	20 g	0,71 m/s 6700 fps
Transmission frequency / Modulation process:	2.402 GHz – 2.482 GHz	GFSK (<i>Gaussian Frequency Shift Keying</i>)
Transmission rate / Transmission spectrum:	1 Mbps	1 MHz
Power output:	2 dBm	
Operation distance:	Approx. 6 m	max. 10 m (under optimal conditions)
Power supply / Battery type:	+3 V _{DC} ±5 %	2x AA 1.5 V/ with 2x AAA 1.5 V double operation time
Power consumption approx.:	Operating: Standby: Sleep mode: Idle mode:	9.3 mA 1.21 mA (after 1 sec.) 0.68 mA (after 1 min.) 0.10 mA (after 5 min.)
Temperature:	Operating: Storage:	0 °C up to +40 °C -20 °C up to +60 °C
Humidity:	Operating and storage:	0 % up to 90 % rel. (downwards compatible to version 1.1)
Required interface:	USB 2.0	
Scope of delivery:	Mouse, USB adapter, 1 set of batteries, user manual, installation CD	
Certified:	CE, FCC, WEEE/RoHS	
Compatibility:	Win 98SE / ME / 2000 / XP / Vista Mac OS X from V10.2 and higher	

LOGISTIC DATA

Material short text:	KeySonic Redhurtle (KSM-1000 RFM)		
Mark:	EAR888-62976468		
Item# / EAN-Code:	12816	4250078142904	
Packing unit:	20 pieces / carton		
Dimensions / Weight approx.:	Mouse:	96 x 56 x 38 mm	65 g (without batteries & adapter)
	USB dongle receiver:	19.2 x 14.4 x 6.3 mm	2 g
	Incl. packaging:	132 x 132 x 82 mm	125 g
	Carton:	435 x 285 x 290 mm	5.2 kg

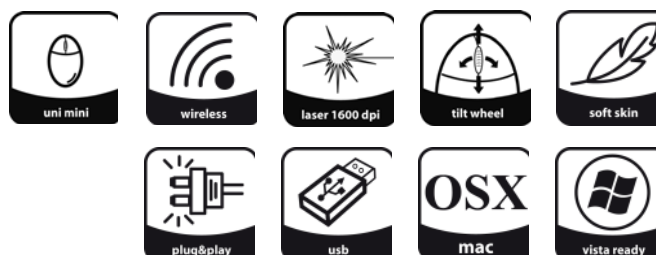

Errors and omissions excepted