


SMAC

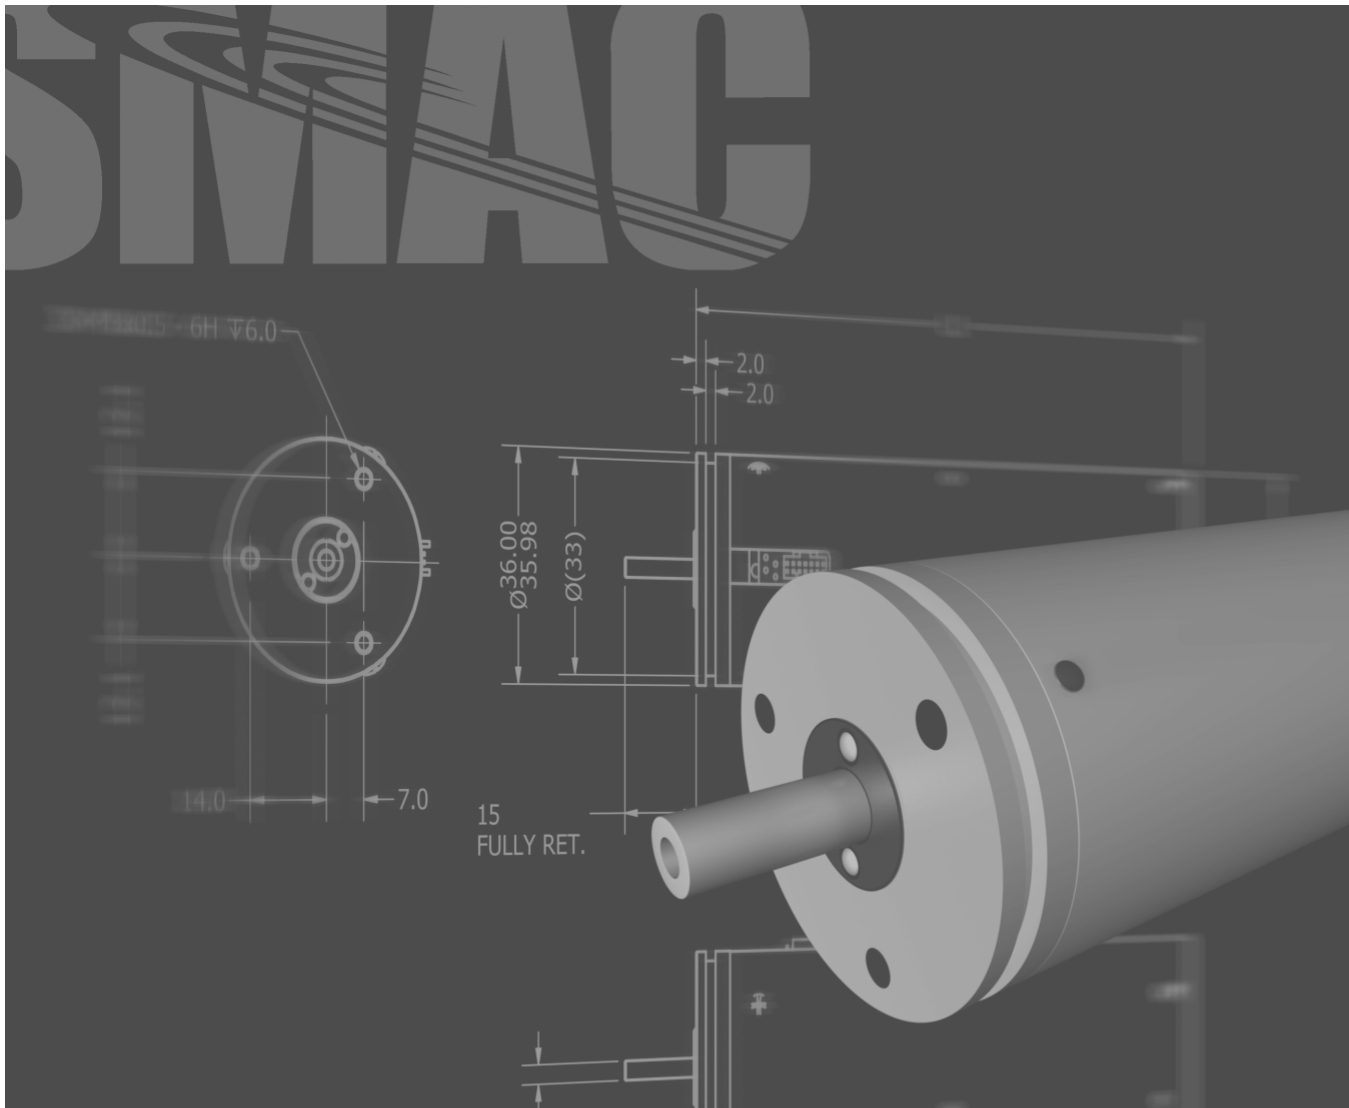

Moving Coil Actuators CA Series

The ability to do work and verify its accuracy at the same time.

Product Overview

Electric Cylinder CA Series



CAL12

Stroke [mm]: 10
Force [N]: 1.5
12mm diameter




CAL35

Stroke [mm]: 15, 25, 50
Force [N]: 4.5 - 34
35mm diameter



CAL75

Stroke [mm]: 25, 50

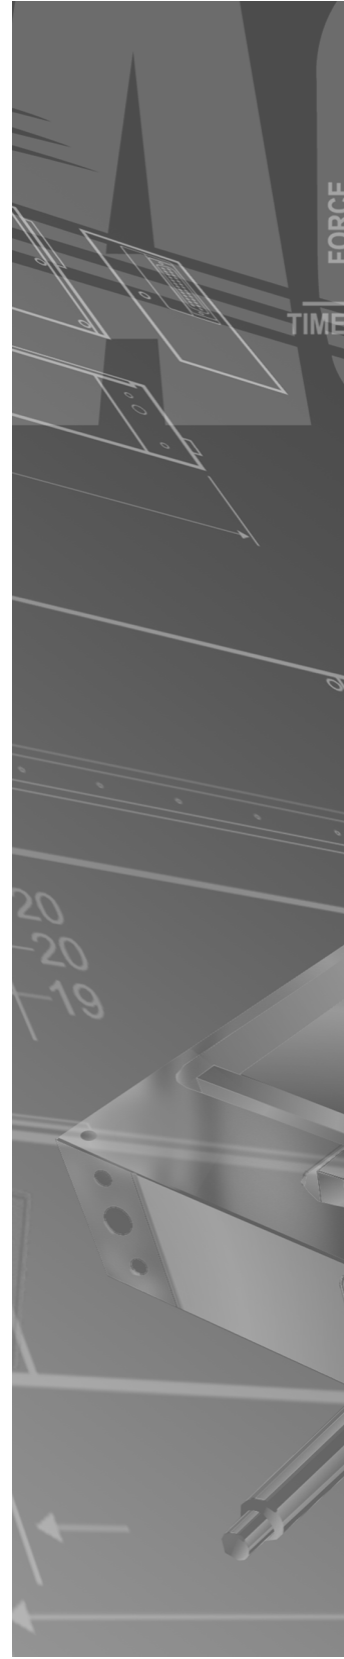


Electric Cylinder

The CA range of multi patented electric cylinders have been designed with the most demanding & arduous of automation tasks in mind. That's why they are ideal for high speed packaging, labelling & bottling applications, pick & place systems, parts feeders & electronic assembly machines along with many, many others where the need for speed, accuracy, precision & repeatability is paramount. They have been designed to replace & fit exactly where standard pneumatic cylinders are currently used but need continuous repair, replacement & maintenance due to high cycle rates, shock & wear. With the SMAC CA range these shortcomings are eradicated.

Linear:

- Stroke up to 50mm, force up to 50N, position encoder resolution 5µm standard, 1, 0.5 and 0.1µm option for most actuators.
- Programmable force, position, acceleration and velocity.

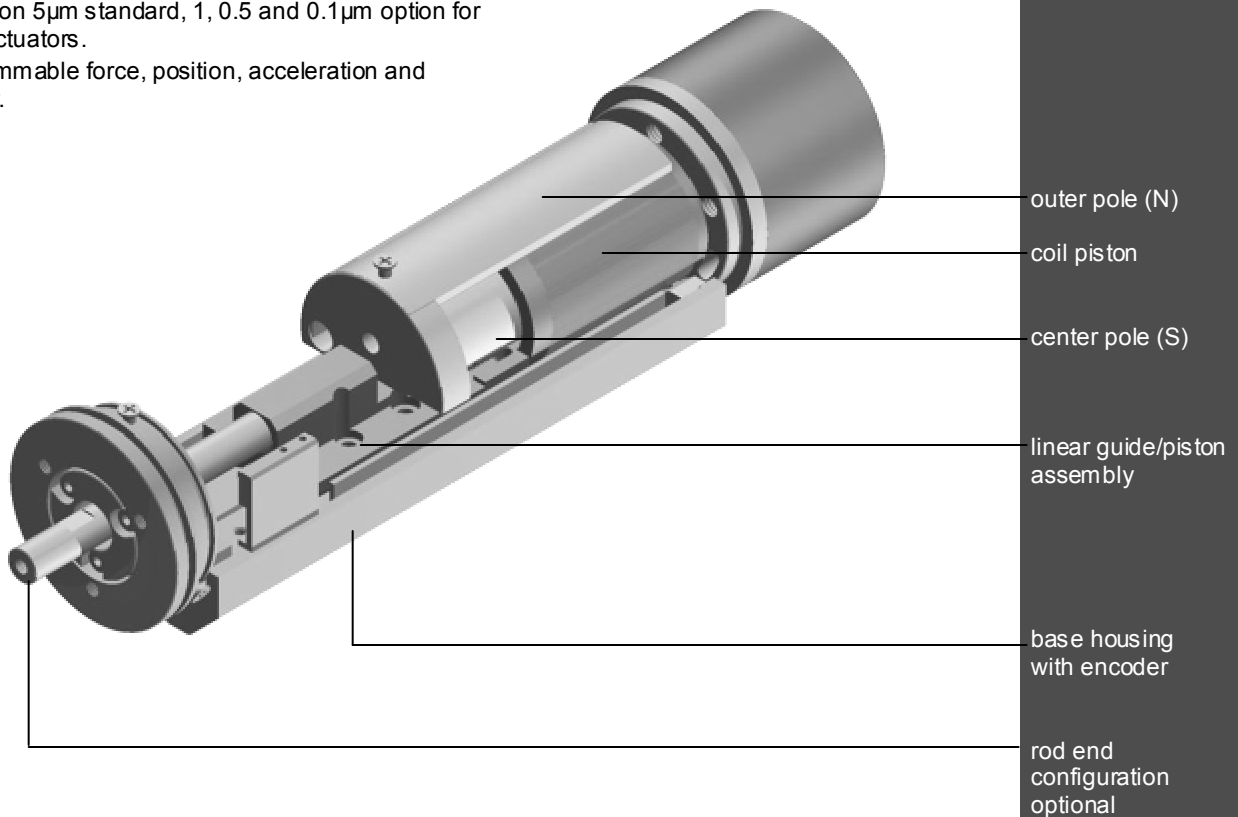

Moving Coil Technology (Voice Coil)

At the heart of all SMAC actuators is the moving coil, also described as a voice coil actuator. The principle is essentially the same as you will find in any permanent magnet loudspeaker. The coil is enclosed in a magnet housing, and by passing a current through the coil, a magnetic field is generated.

The amount of force generated is governed by the equation

$$F \propto N I B$$



where; **F** is the force generated

N is the number of turns in the winding (Constant)

I is the current flowing through the winding and

B is the magnetic flux (Constant)

Therefore, doubling **I (current)** doubles **F (Force)**.




The SMAC Advantages

- 40G Acceleration - light moving mass produces high rate of acceleration
- “Soft-land” capability
- Long life (100 million+ cycle)
- Compact direct drive electric linear actuator
- High degree of speed & position repeatability
- Precise force control - Centered piston reduces moment effect
- Programmable positioning
- Easy to mount
- 100% Data capture & feedback facility
- Very quiet. No air exhaust = No air expense
- No external sensors or switches required (reducing wiring & labour costs)
- Energy efficient - 1.8 amps & 24 volts - low power consumption
- Cost Effective Performance and competitive price range

Programmable Force

	10gf	750gf	1500gf
AVE	9.5	749.6	1499.1
STDEV	0.13	0.19	1.05

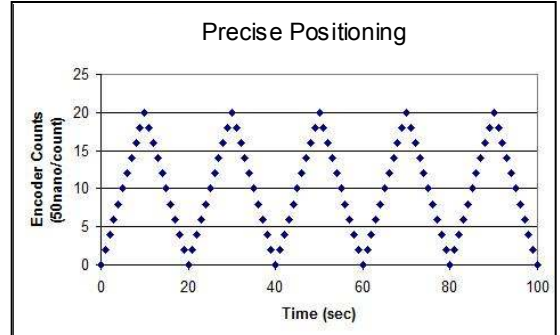

Programmable Features

The actuator is totally programmable for force, acceleration and velocity. It can operate in three different modes:

Force Mode: Force Mode is open loop, using no feed back from the encoder. The actual position is still monitored but has no effect upon the output.


Velocity Mode: Velocity Mode allows the actuating rod to be moved with a given velocity, acceleration, force and direction. Typically used for a “Soft-Land” routine.

Position Mode: Position Mode will allow the actuating rod to be moved to various positions along the stroke using acceleration, velocity and force. It is possible to make absolute, relative and “learned position” moves.


What is a Soft-Land?

The “Soft-Land” is a routine which allows the actuator rod or gripper jaw to land on the surface of component with a low programmable force. This is particularly useful wherever delicate or high value components are being handled.

The routine consists of a controlled low force approach in velocity mode, whilst the position error is constantly monitored. Once contact is made the position error builds up until a pre-programmed figure is reached - resulting in the rod maintaining position on the surface of the component.

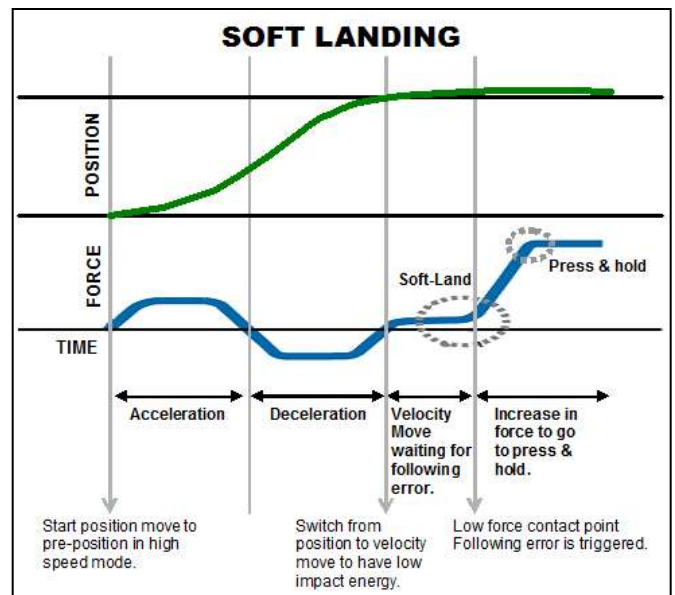

Part Numbering System

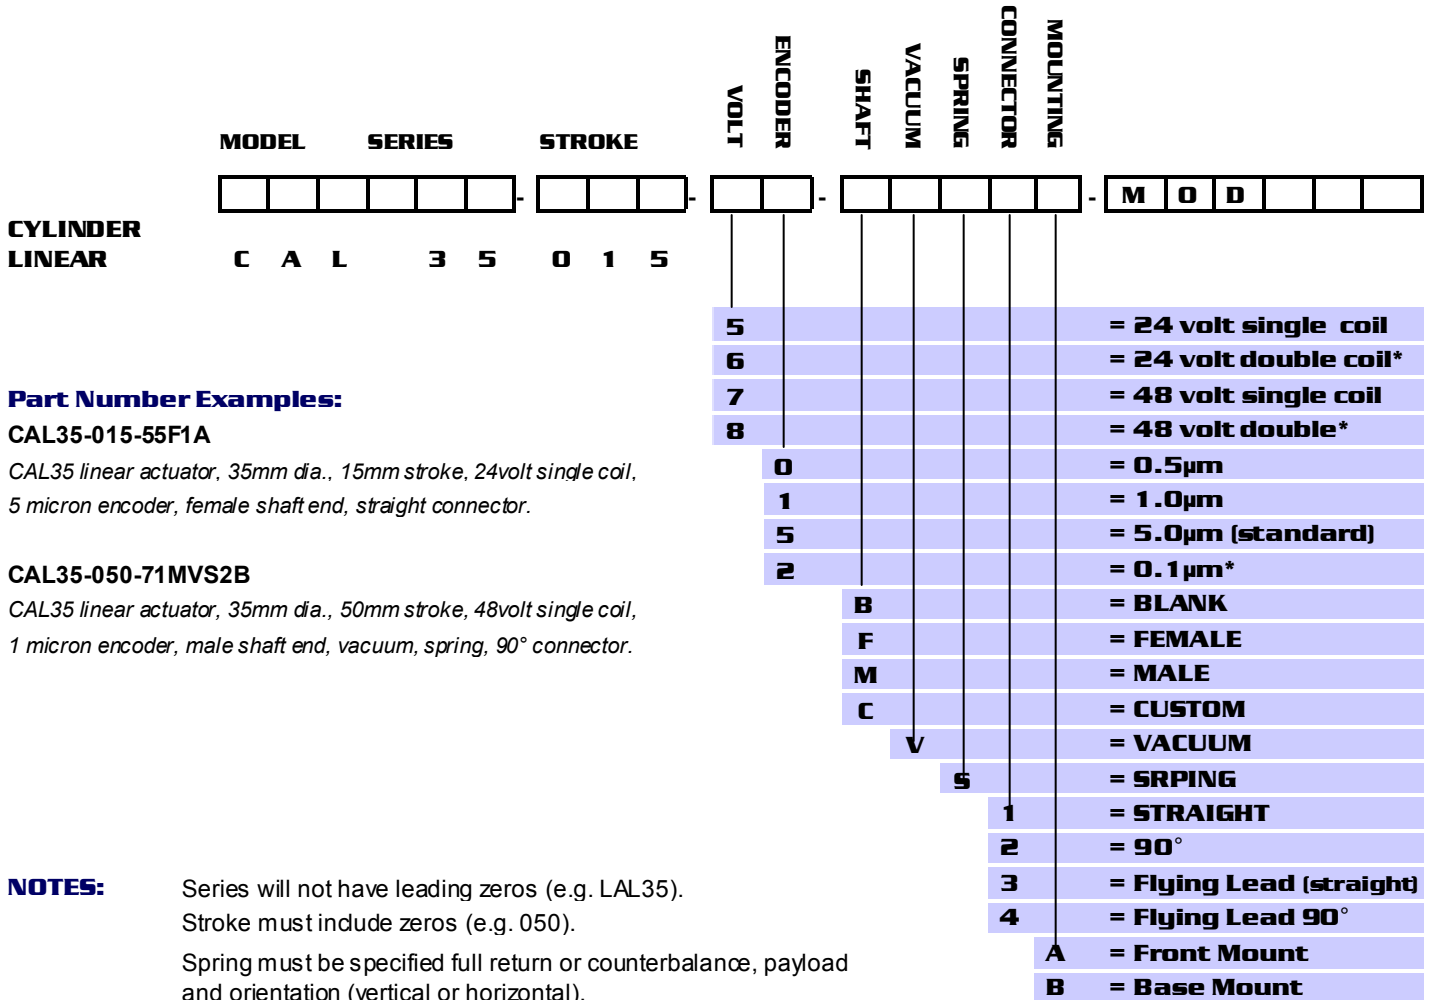

Part Number Examples:

CAL35-015-55F1A

CAL35 linear actuator, 35mm dia., 15mm stroke, 24volt single coil, 5 micron encoder, female shaft end, straight connector.

CAL35-050-71MVS2B

CAL35 linear actuator, 35mm dia., 50mm stroke, 48volt single coil, 1 micron encoder, male shaft end, vacuum, spring, 90° connector.

NOTES:

Series will not have leading zeros (e.g. LAL35).

Stroke must include zeros (e.g. 050).

Spring must be specified full return or counterbalance, payload and orientation (vertical or horizontal).

* check availability

Electric Cylinder

	Voltage [DC]	Size: Dia x L [mm]	Stroke [mm]	Maximum Force [N]	Force Constance [N/A]	Moving Mass [kg]	Max Current [Amp]	Watts	Weight [kg]
CAL12-010-5	24	Ø12x121	10	1.5	1	0.01	1.5	36	0.08
CAL35-015-5	24	Ø35x149	15	12	7.2	0.065	1.7	41	0.52
CAL35-015-7	48	Ø35x149	15	17	9.1	0.065	2	82	0.52
CAL35-015-6	24	Ø35x209	15	24	7.2	0.090	3.4	82	0.75
CAL35-015-8	48	Ø35x209	15	34	9.1	0.090	4	163	0.75
CAL35-025-5	24	Ø35x169	25	8	6	0.075	1.7	41	0.65
CAL35-025-7	48	Ø35x169	25	11	6.8	0.075	2	82	0.65
CAL35-025-6	24	Ø35x229	25	16	6	0.108	3.4	82	0.874
CAL35-025-8	48	Ø35x229	25	22	6.8	0.108	4	163	0.874
CAL35-050-5	24	Ø35x253	50	4.5	4	0.093	1.7	41	0.849
CAL35-050-7	48	Ø35x253	50	6.5	4.5	0.093	2.2	82	0.849
CAL75-025-7	48	Ø75x270	25	107	37	0.354	3	145	5.1 (w/ base mount)
CAL75-050-7	48	Ø75x270	50	50	17	0.49	3	145	4.3

NOTE: SMAC requires that all units must be operated at less than 40% maximum duty cycle. Please see page 8 or user manual for further explanation on how to calculate.

We manufacture actuators to suit our customers' requirements. Please call us if you do not find the right actuator in this list.

Options & Modifications (Consult factory for availability):

Encoder resolutions:	5µm standard. 1µm, 0.5µm and 0.1µm optional for most units.
Shaft ends:	Male, Female, Blank and Custom
Return spring:	Prevents the shaft from dropping during vertical operation when power is cut.
Vacuum:	For pick and place applications.



CAL12



CAL35



CAL75

MODEL	SERIES	STROKE	VOLT	ENCODER	SHAFT	VACUUM	SPRING	CONNECTOR	MOUNTING
C	A	L							

Controllers / Amplifiers

SMAC can supply a range of single and multi axis controllers together with stand alone amplifiers and stepper driven driver. Controllers are programmed by mnemonic type command instructions via an RS-232 interface into NVRAM. They require no supplementary software.



LAC-1

Single axis controller, built-in amplifier

Mode:

- Position
- Velocity or Continuous
- Force

8 I/P, 8 O/P TTL general purpose I/O's, RS232 Interface, 3 analog I/P



LAC-25

2 axis controller, built-in amplifier

Modes:

- Position
- Velocity
- Force
- Gearing

Independent or coordinated 2 axis motion, 4 I/P, 4 O/P, Opto-isolated general purpose I/O's, 2 analog I/P, 2 analog O/P, RS232 Interface



LAA-5

Single axis amplifier
+/- 10 Volt I/P, 3 Amp O/P



LAD-1

Smart Driver for single axis stepper I/P to servo O/P RS232 Interface

Cables


Actuator	Controller / Amplifier / Smart Driver			
	LAC-1	LAC-25	LAA-5	LAD-1
CAL12 (*1)	CAH-PT14-26 or Flying lead			
CAL35	CAH-LOD-03		CAH-LAD-03	CAH-LSD-03
CAL75	LAH-LOD26-03		LAH-LAD26-03	LAH-LSD26-03
2 x CAL35		CAH-LTD-03		
2 x CAL75		CAH-LTD-03		

All cables are 3m standard, optional lengths from minimum 1m up to maximum 10m.


(*1) Cable for CAL12 series is 0.3m (1') standard.

Superflex is available as an option. Suitable for robotic applications.

Hardware Configuration

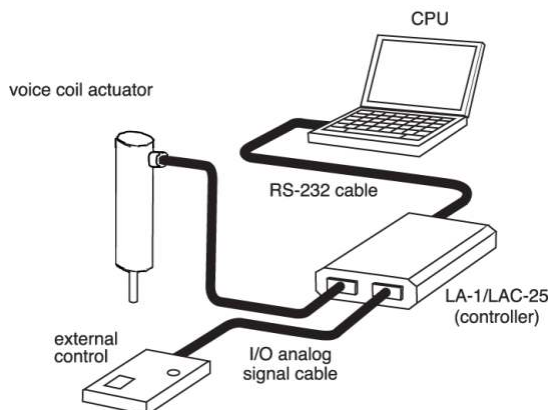

Hardware with SMAC Controllers

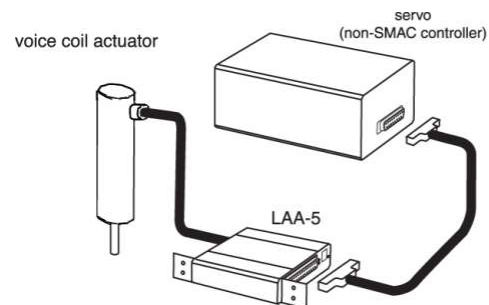

Hardware with SMAC Amplifier

Installation Guideline

Duty cycle

All units must be operated at less than 40% maximum duty cycle. This can be calculated as follows:

$\% \text{ of max force applied} \times \% \text{ of cycle time it is applied} = \% \text{ duty cycle}$

For example:

- 100% force x 40% of cycle time = 40% duty cycle.
- 60% force x 50% of cycle time = 30% duty cycle.
- 40% force x 100% of cycle time = 40% duty cycle.

Recommendations from SMAC are that this duty cycle must not be exceeded over a one second time period.

NOTE: Failure to observe this duty cycle recommendation will usually result in the actuator sustaining damage through overloading. Overloading will overheat the coil and may cause it to deform and touch on the magnet housing.

Continuous Force

Peak force applied for duration shorter than 0.4 sec. in one second interval. (force mode): 40% of peak force, continuous

Force Mode

The specified current may be applied continuously to generate the desired force, the recommended continuous force limit should be set in the control program.

In vertical operation, the actuator rod will drop when power is cut off. A rod in the lowered position may be damaged by other moving parts in the machine. A return spring (if installed) will keep the rod raised. A safety lock-out should be installed in the machine program to confirm the rod location before another interfering component can be moved.

SMAC actuators are equipped with these safety features:

- Limit Switches: indicates end-of-stroke
- Index Line/Home Position: used to monitor absolute position
- Break away shaft (optional)

Safety Considerations

Unintentional full force may be applied continuously under the following conditions:

- missed target position
- excessive friction
- equipment malfunction, i.e. jam

If left undetected, this can cause destruction of the coil in some units. Servo program should perform these checks regularly:

- Re-home: assure target position has not shifted beyond end of stroke
- Time-outs: shut power down within 10 seconds of error detection
- Following Error Limits: software safety
- Check limit switches
- Check temperature sensor

Mounting

If the actuator is mounted vertically, the shaft drops down when the actuator is powerless. It is possible that other moving parts of the machine may damage the actuator at this position. A return spring would hold the actuator in an upper position when it is powerless.

A safety function in your machine should check at which position the actuator currently is before other components may move into the working area of the actuator.

Individual Modifications

Many of the standard actuators listed in the following pages are compatible with both add-on options and modifications. In addition to the standard vacuum and spring option SMAC can offer the following modifications subject to approval by the factory.

Double Coil

The addition of an extra coil can enhance both force and acceleration.

Custom Shafts

In addition to the standard male/female rod-ends we can also offer options such as "break-away" shafts and custom shaft diameters.

Flying Lead

In place of the standard chassis connector we can offer a flying lead option.

Cable Options

Whenever an SMAC actuator is being manipulated on any 3rd party device such as a gantry or multi-axis robot, SMAC strongly recommends that a superflex cable is used. Cable lengths can be increased from the standard 3 meters up to a maximum of 10 meters.

The SMAC 12 Month Product Guarantee

SMAC Corporation designs and manufactures advanced electric actuators. All SMAC actuators are quality products specifically designed and built for long service. Therefore, all actuators appearing in this catalogue are guaranteed for a period of twelve months from the original date of shipment from our factory.

This Guarantee is limited to the one-time replacement or rebuilding of any actuator which should fail to operate properly. Actuators must be returned transportation prepaid and received at our factory within the Guarantee period. They will be returned to the customer at the expense of SMAC.

No claims for labour, material, time, damage or transportation are allowable. Actuators damaged as a result of abnormal customer application are excluded from this Guarantee. The Guarantee does not apply to loss or damage caused by fire, theft, riot, explosion, labor dispute, act of God or other causes beyond the control of SMAC. SMAC shall in no event be liable for remote, special or consequential damages, under the SMAC Guarantee or under any implied warranty.

The above Guarantee is our manner of extending the engineering and service resources of the SMAC organization to assure our customers long and continued satisfaction.

U.S. and world wide patents issued & applied for. SMAC improves its product line on a continuing basis. Specifications and mechanical dimensions are subject to change without notice. Please consult factory before proceeding with your design.

The SMAC Rebuild Program

Actuators no longer covered by the SMAC Guarantee can be rebuilt under the SMAC Rebuild program. Our continued research and development program extends the life of our actuators making them even more reliable under adverse operating conditions. Actuators returned under this program are completely disassembled, inspected and rebuilt to current operating standards wherever possible, tested and returned within a few days for a reasonable charge (typically 35% of standard list price). All rebuilt actuators carry for 90 days from date of shipment from our factory the same Guarantee as provided for new actuators.

SMAC products have been tested and found to be fully compliant with EN 50082-2 & EN 55011 Group 1, Class A.


Sample Applications

Switch Test



Application Examples


- Automotive switch test
- Cell phone keypads
- Membrane keypads
- Valves, sensors and relays
- PC Keyboards
- ATM keypads

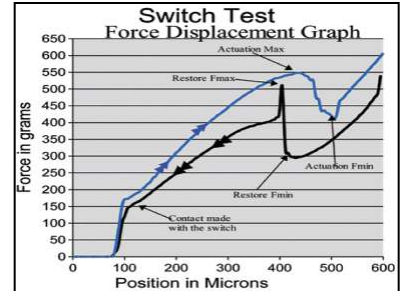

SMAC Advantage

- Verify hysteresis and switch differential
- Accurately simulates human movement profiles
- Combined force and position measurement
- High speed life testing
- 1,000,000 cycles in 8 hours
- QA reporting functions to verify 100% test

Measuring & Gauging



Key Operation :

Contact measurement of pockets machined in rollers. Each pocket is only 50microns in diameter and 50microns deep and each roller contains approx 30,000.

SMAC Advantage:

Contact measure. Previous system was vision which could only measure diameter and not depth.


Key Operation :

Measuring OD of metal bush and roundness at cycle time of 3 sec. Soft-land on the parts and inspect the roundness by rotating the part 360° with encoder feedback.

SMAC Advantage:

Compact size, long life cycle, reliable position control, soft-land.

Pick & Place



Key Operation :

Pick and place electronic components from a feeder to the semiconductor finishing equipment at 15Hz.

SMAC Advantage:

High cycle operation, soft-land = precise force control, long life cycle.

Glass

- Scoring (V-Cutting) for solar panels and LCDs
- Glass cutting, de-burring, positioning
- Measuring thickness
- Chamfering and bevelling

Welding

Key Operation :

Applying even and consistent pressure for EDM assembly electronic-welding equipment.

SMAC Advantage:

Precise control of the contact force to avoid damaging the parts.
Soft-landing profile uses a high speed approach to save time.
Precise and repeatable positioning.

Scanning

Key Operation :

Moving camera/micro scope lens to focus material for inspection or analyse

SMAC Advantage:

Accurate and repeatable force control and positioning with sub-micron resolution.
Compact size.
Easy set up and programming.



SMAC



5807 Van Allen Way
Carlsbad, CA 92008
Tel: 760-929-7575
Fax: 760-929-7588
Email: info@smac-mca.com
www.smac-mca.com

National & International Offices

North America

SMAC Midwest (MI)

Suite 175
4595 Broadmoor Ave. S.E.
Grand Rapids, MI 49512
Tel: +1 616-554-5672
Fax: +1 616-554-5762
Email: s_curtiss@sbcglobal.net

SMAC Midwest (IL)

Tel: +1 312-446-8643
Email: haidos@gmail.com

SMAC Mexico

Tel: +52 (0)8381-7999
Email: mepg2205@prodigy.net.mx

Europe

SMAC Europe Ltd.

Ikon House, Rutherford Way
Crawley, West Sussex
United Kingdom RH 10 9PB
Tel: +44 (0)1293-520147
Fax: +44 (0)1293-539829
Email: info@smac-mca.co.uk

SMAC Iberia (Spain and Portugal)

Tel: +351 (0)96-150-8939
Email: info@smac-mca.pt

SMAC Netherlands

Steenovenweg 5
5708 HN Helmond
Postbus 172, 5700 AD Helmond
Tel: +31 (0)492-472494
Fax: +31 (0)492-472600
Email: info@smac-mca.nl

SMAC Germany (Rott am Inn)

Rotmooser Str. 1a
83543 Rott am Inn
Tel: +49 (0)8039-908101
Fax: +49 (0)8039-908102
Email: poggenbeck@smac-mca.de

SMAC Germany (Stuttgart)

Tel: +49 (0)179-9793997
Email: koepplin@smac-mca.de

SMAC Switzerland

En Chamard 55b
CH-1442 Montagny-près-Yverdon
Tel: +41 (0)24-430-11-17
Mob: +41 (0)79-629-17-49
Email: martin.frei@smac-mca.ch

SMAC France

Tel: +33(0)6-62-39-53-36
Fax: +33(0)1-55-95-33-25
Email: apaul@smac-mca.fr

Asia

SMAC Japan

Shinwa Bldg.
2-6-8 Hamamatsu-Cho
Minato-Ku, Tokyo
Japan, 105-0013
Tel: +81 (0)3-5733-2450
Fax: +81 (0)3-5733-2470
Email: smacjapan@smac-mca.co.jp

SMAC Taiwan

1F, No. 320, Neihu Rd., Sec 1
Taipei 114, Taiwan, ROC
Tel: +886 (0)22798-6177
Fax: +886 (0)22798-6178
Email: sales@smac-mca.com.tw

SMAC Malaysia

Unit 132 Block A 1st Floor Lobby 7,
Damansara Intan E-Business Park,
Jalan SS22/27, 47400 Petaling Jaya
Selangor
Tel: +60 (0)3772-62304
Fax: +60 (0)3772-60982
Mob: +60 (0)12207-1097
Email: martin@smac-mca.com.my

SMAC China (Shanghai)

Shanghai ZIZHU Science-based
Industrial Park
5004,5005 Room, 5th Floor, 2 Bldg.
555 Dongchuan Road
Shanghai 200240
Tel: +86 (0)21-6435-1661
Fax: +86 (0)21-3429-0092
Mob: +86 (0)133-1186-5359
Email: smac.sh@163.com

SMAC China (Beijing)

Tel: +86-(0)10-84965726
Fax: +86-(0)10-84965726
Email: emily@smac-china.com

SMAC Korea

670-5, Samwon Gold Plaza Bldg. 214
Inchang-Dong, Guri-Si, Kyungki-Do
Korea, Postal # : 471-841
Tel: +82 (0)31-516-9006
Fax: +82 (0)31-516-9007
Mob: +82 (0)10-3934-9006
Email: smac.korea@yahoo.com