

# SELECT<sup>®</sup> POWER DIRECT-VENT



## Residential Gas Water Heaters

6-Year Tank Warranty • 6-Year Parts Warranty



# No Longer in Production

**Power Direct-Vent Design** – Two-pipe closed-combustion system draws all make-up air from outside the home, eliminating problems caused by insufficient indoor ventilation. For installation versatility, system permits combined horizontal and vertical venting and air intake runs up to 45 feet (including one 90° elbow) using 3" Schedule 40 PVC, CPVC or ABS pipe.

**New Intelli-Vent Gas Control** – Equipped with nearly-indestructible silicon nitride hot surface igniter, and advanced electronics for more precise control of water temperature and easy to understand system diagnostics.

**Quiet Modular Blower** – Equipped with 110/120 volt electrical system (rating 3 amps or less), 7-foot cord, standard 3-prong male connector.

**Diffuser Dip Tube** – Helps reduce lime and sediment buildup, maximizes hot water output. Made of State PEXAN™, a cross-link PEX polymer that can withstand long-term exposure to water temperatures up to 400°F.

**Green Choice™ Eco-Friendly Gas Burner** – Patented design reduces NOx emissions up to 33% and complies with Southern California and Texas requirements.

**Durable Brass Tamper-Resistant Drain Valve.**

**Glasslined Tank** – For long-lasting protection against rust and corrosion.

**Aluminum Anode Rod** – For additional protection against rust and corrosion.

**Factory-Installed Temperature & Pressure (T&P) Relief Valve.**

**Thick, CFC-Free Foam Insulation.**

**Code Compliance** – All models meet or exceed federal minimum energy standards effective January 20, 2004, according to latest editions of the National Appliance Energy Conservation Act (NAECA). They also comply with the latest editions of the B.O.C.A. National Codes, C.E.C., U.B.C., S.B.C.C., C.A.B.O. and the H.U.D. standards. All models design-certified by CSA International according to ANS Z21.10.1 standards governing storage-type water heaters.



For Additional Technical Information,  
PHONE 800-365-0024

STATE WATER HEATERS  
500 Tennessee Waltz Parkway Ashland City, TN 37015  
www.statewaterheaters.com

 **state**  
WATER HEATERS  
*The Expert's Choice<sup>®</sup>*

# SELECT<sup>®</sup> POWER DIRECT-VENT



## Residential Gas Water Heaters

6-Year Tank Warranty • 6-Year Parts Warranty

MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GAL. CAP.	BTU INPUT PER HOUR NATURAL †	RECOVERY 90°F RISE GALLONS †	R VALUE*	DIMENSIONS IN INCHES							APPROX. SHIPPING WEIGHT (LBS.)
							A	B	C	D	E	F	DRAFT HOOD OUTLET	
PR6 40 XBPDT	73	.59	40	40,000	41	16	57	48-1/2	21	15	8	42	3	224
PR6 50 XBPDT	80	.58	50	40,000	41	16	66	57-1/2	21	15	8	51	3	232
PR6 50 XRPDT 5	80	.58	50	65,000	64	16	69-1/2	61	21	15	8	54-1/2	3	232
PR6 75 XRPDT	123	.53	75	70,000	72	16	71-1/2	61-1/2	26-1/4	15-1/2	8	54-3/4	3	300

Recoveries are rounded to nearest gallon

Water Connections – 3/4" on all models


When ordering Propane, change "X" to "C" in model number (PR6 40 CBPDT)

† Propane Gas Inputs/Recoveries – PR6 40 CBPDT: 36,000 BTU / 37 GPH  
 PR6 50 CBPDT: 38,000 BTU / 39 GPH  
 PR6 50 CRPDT 5: 60,000 BTU / 59 GPH  
 PR6 75 CRPDT: 65,000 BTU / 67 GPH

\*R Value shown is "Performance Rated"

### IMPORTANT: VENTING AND COMBUSTION AIR REQUIREMENTS

Read and follow requirements shown in the Installation Manual for Select Power Direct-Vent Gas water heaters dealing with type, placement and length of vent pipe and vent termination, as well as clearances required to provide adequate combustion air and proper ventilation.

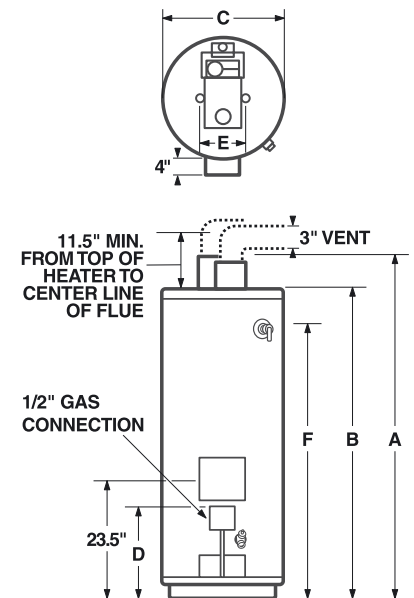

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For Additional Technical Information,  
**PHONE 800-365-0024**

STATE WATER HEATERS  
 500 Tennessee Waltz Parkway, Ashland City, TN 37015  
[www.statewaterheaters.com](http://www.statewaterheaters.com)

