

RANGE COMPOSITION

The models detailed on this sheet are 2 fan assisted 600 and 1300 litre refrigerators that offer excellent standards in terms of performance and efficiency. These models come in fridge, versions in 304 AISI and are available with full doors.



726453

AU SERIES

DIGITAL REFRIGERATORS - 60 Hz **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external structure in 304 AISI, top and back in galvanized steel. 150 mm high - adjustable feet.
- ◆ Digital control panel allowing the easy and precise setting and control

- of the internal temperature.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water.

CHARACTERISTICS	MODELS	
	RS06PX1F6 726453	RS13PX2F6 726461
Operating temperature - min/max °C	0/10	0/10
Operating mode	Ventilated	Ventilated
Type of stainless steel		
external	304 AISI	304 AISI
internal	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.		1300
External dimensions - mm		
width	720	1440
depth/with open doors	788, 1440	788, 1440
height	2000	2000
Internal dimensions - mm		
width	600	1320
depth	665	665
height	1480	1480
Min/Max internal humidity - %	85	85
N° and type of door	1	2
Door hinges	Right Side	1 Left+1 Right
N° and type of grids (included)	3, GN 2/1	6, GN 2/1
N° defrost in 24 hrs.	4	4/25
Refrigerant type	R134a	R134a
Refrigerant quantity - g.	140	310
Refrigeration power - W	612	396
Power - kW		
installed-electric	0.3	0.524
Net weight - kg.	126	217
Power supply - V, phases, Hz	220 V, 1, 60	220 V, 1N, 60
INCLUDED ACCESSORIES		
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	3	6
2/1 GN GREY "RILSAN" GRID	3	6

- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- ◆ Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.


- ◆ High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy.

- ◆ All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- ◆ Stainless steel feet (plastic interior).
- ◆ A wide range of optional accessories are available.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

ACCESSORIES	MODELS	
	RS06PX1F6 726453	RS13PX2F6 726461
2 S/S RUNNERS FOR 600-650/1300-1400L_REF	881456	881456
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539
2/1 GN AISI 304 S/S GRID	881067	881067
2/1 GN GREY "RILSAN" GRID	880720	880720
3 RILSAN CENTR.GRIDS-2 DOOR REF/FREEZERS		880211
ENERGY FREE ALARM DEVICE	881089	881089
KIT HACCP EKIS	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205
KIT TO FIT 11 PASTRY TRAYS (400X600 MM)	881031	881031
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451	881451



www.zanussiprofessional.com

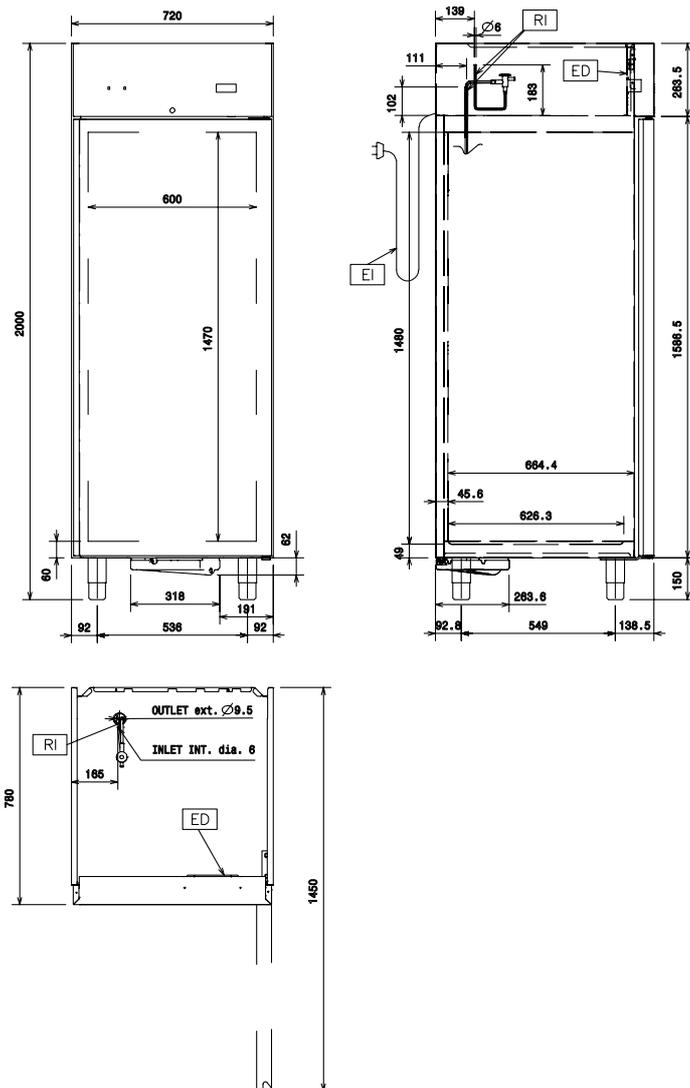


EI - Electrical connection

RS06PX1F6
726453
220 V, 1, 60



www.zanussiprofessional.com

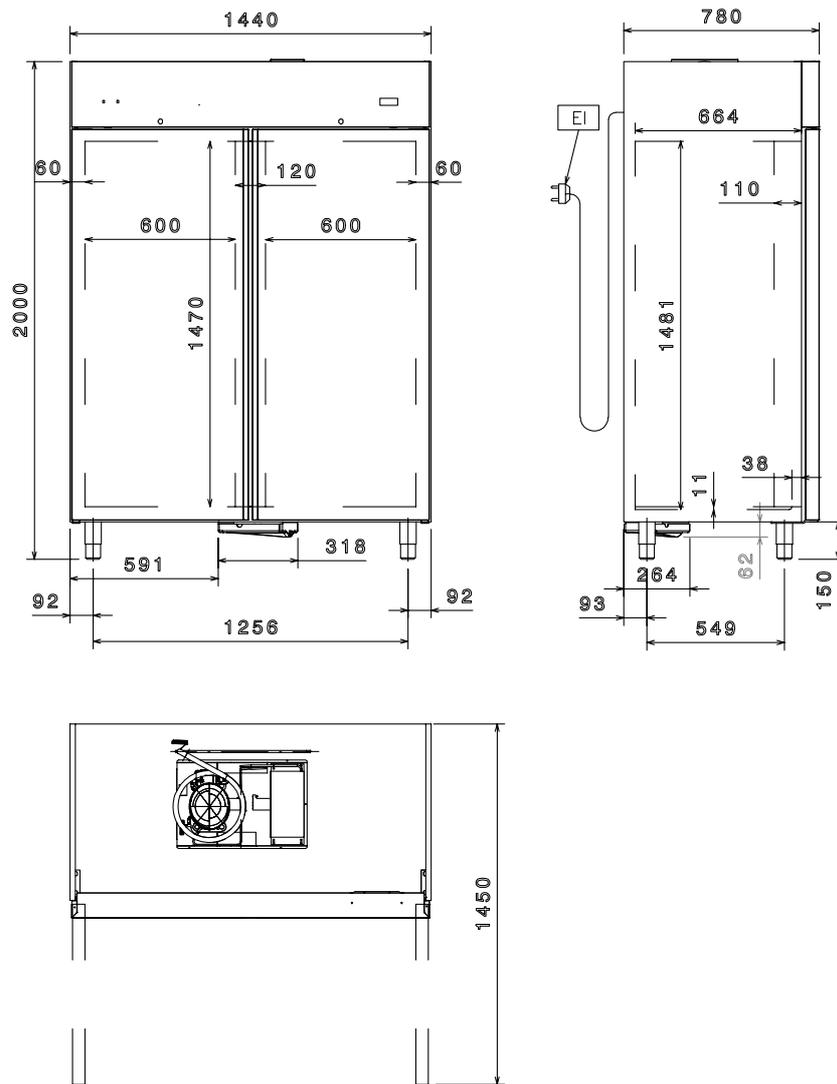

EI - Electrical connection

RS13PX2F6
726461
220 V, 1N, 60



www.zanussiprofessional.com