

TripliX™

TripliX

iX Range

Ref. TRC 8022

- > Event Remote Console for Di-VentiX, CentriX, EventiX, NatiX
- > For the Control of up to 3 iX Seamless Switchers
- > Compact, User-friendly and Easy to Connect Device


Download
at www.analogway.com:
- product spec sheets in pdf
- latest product upgrades

TripliX™ allows to simultaneously or independently control up to 3 units of the new powerful iX range Seamless Switchers: **Di-VentiX**, **EventiX**, **CentriX** and **NatiX**.

Up to 24 sources can be displayed on 3 screens (6 in matrix mode). All the sequences and effects of the iX Range (cut, fade, titling, PIP and wipe) can be synchronized or separately activated, automatically or with the T-Bar.

TripliX is compact, easy to use and to connect, and designed to be integrated in any 19" rack control room.

The combination of TripliX and an iX Seamless Switcher can be used together with **Show Manager Open Edition** and/or **Cross Blender** for spectacular wide screen presentations.

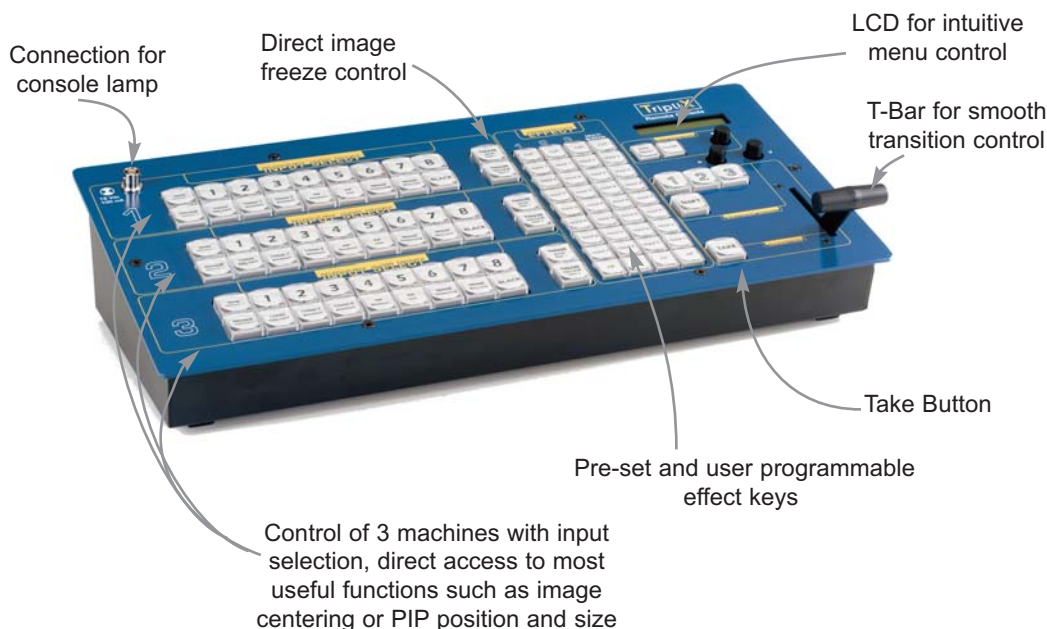

SPECIFICATIONS :

LCD WINDOW & CONTROL BUTTONS FOR

- Input format status
- Output format & sync. selection
- Switching effect transition
- Contrast and black level, RGB, color, hue, brightness, sharpness and gamma adjustments
- Test patterns
- Front panel & control key lock out

INPUT CONNECTORS

3 x RS 232 connector (DB9 male) to connect up to 3 iX range products

DIMENSIONS:

D 220 mm x W 446 mm x H 120 mm
D 8.7" x W 17.5" x H 4.7"

WEIGHT:

4 kg / 8.8 lbs

POWER SUPPLY:

Internal, universal, automatic, 100 - 250 VAC; 50/60 Hz (25W) (UL, CSA, CE, IEC 950)

SUPPLIED WITH:

- 1 x AC power cable
- 3 x remote cables DB9 (M/F) (3m/10 ft)
- 1 x update cable DB9 (F/F) (1.8m/6 ft)
- 1 x user manual

WARRANTY: 3 year warranty on parts and labor, back to factory

Specifications subject to change without notice

REFERENCE

TRC8022: TripliX™



ANALOG WAY®

www.analogway.com

P/N: TRC8022:C0606-VA