

## RANGE COMPOSITION

The range consists of 1 fan assisted model of 600 litres refrigeration cabinets that offer excellent standards in terms of performance and efficiency. These models come in fridge/freezer version in 304 AISI and is available with full doors.



## AU SERIES

### REFRIGERATORS/FREEZERS 1300 LT **ZANUSSI** PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external structure in 304 AISI stainless steel, external base, top and back in galvanized steel. 150mm height-adjustable feet.
- ◆ Digital control panel allowing the easy and precise setting and control of the internal temperature.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water.
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- ◆ Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.
- ◆ High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy.


All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.

- ◆ Stainless steel feet (plastic interior).
- ◆ A wide range of optional accessories are

available.

- ◆ CFC and HCFC free.

CHARACTERISTICS	MODELS
	RS13DFX2F 726465
Operating temperature	
first compartment - min/max °C	-2 / 10
second compartment - min/max °C	-22 / -15
Operating mode	Ventilated
Type of stainless steel	
external	304 AISI
Gross capacity (D.I.N. 8952) - l.	650, 650
External dimensions - mm	
width	1440
depth/with open doors	788, 1440
height	2000
Internal dimensions - mm	
width	1320
depth	665
height	1480
N° and type of door	2
Door hinges	1 Left+1 Right
N° and type of grids (included)	6, GN 2/1
Compressor power - HP	1/5
N° defrost in 24 hrs.	4/20'
Refrigerant type	R134a
Refrigerant quantity - g.	130, 300
Refrigeration power - W	752
Power - kW	
installed-electric	0.99
Net weight - kg.	250
Power supply - V, phases, Hz	230 V, 1, 50
INCLUDED ACCESSORIES	
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	6
2/1 GN GREY "RILSAN" GRID	6

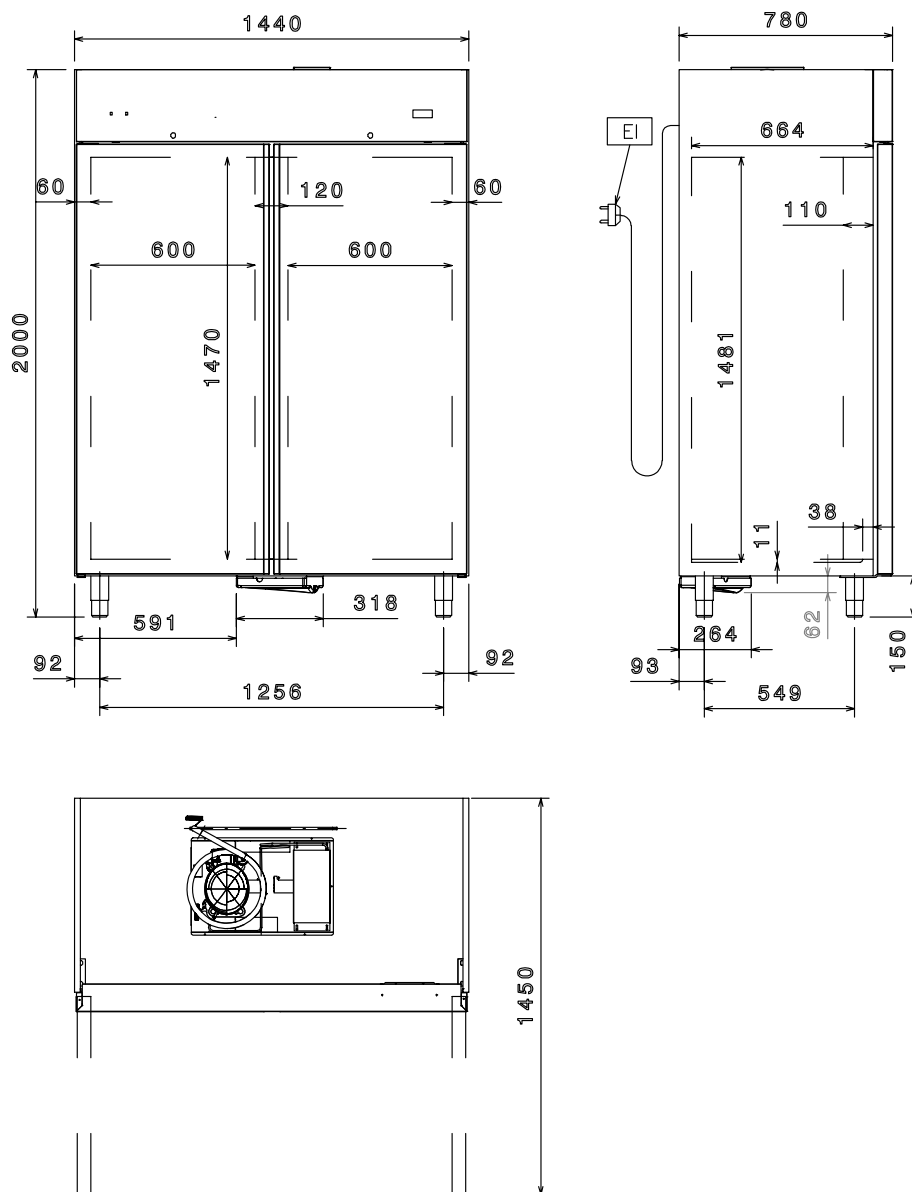

	RS13DFX2F 726465
EI - Electrical connection	230 V, 1, 50



ACCESSORIES	MODELS
	RS13DFX2F 726465
2 S/S RUNNERS FOR 600-650/1300-1400L REF	881456
2 WHEELS FOR REFRIGERATORS/REFRIG. TABLES	880539
2/1 GN AISI 304 S/S GRID	881067
2/1 GN GREY "RILSAN" GRID	880720
KIT HACCP EKIS	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457

