

1000-MR2
DOUBLE CAVITY

- ◆ The Alto-Shaam Mobile refrigerated Cart is not just a refrigerator on wheels, but a well-designed and efficient system for storing and transferring refrigerated food products.
- ◆ Adjustable shelves allow for the storage of plated items, pans or other items.
- ◆ Full perimeter stainless steel bumper, transport handles, heavy duty casters along with the cart's reduced height provide easy mobility.
- ◆ Electronic thermostat has digital display to view inside set air temperature.
- ◆ Non-magnetic stainless steel surface resists corrosion.
- ◆ Environmentally safe refrigerant.
- ◆ All mechanical equipment is easily accessible, without the use of tools, for ease in servicing.
- ◆ Center mounted cooling coil balances and distributes air evenly.
- ◆ Condensate from the cooling coil is used to cool the compressor, therefore, it is unnecessary to have an alternate means of water disposal.



Sizes and Specifications






Model 1000-MR2 Mobile Refrigerator

Double cavity model with 20 gauge, non-magnetic stainless steel exterior and door, fully insulated with high density foamed-in-place polyurethane. Doors include two (2) positive door latches with magnetic-mechanical closing and cylinder door lock. The mobile refrigerator is controlled by one (1) ON/OFF switch, with a factory set temperature of 36°F (2°C). A LED display monitors the inside temperature. Unit includes one (1) transport handle on each end of the cart, and a full-perimeter stainless steel bumper guard. Cart is furnished with removable side racks, six (6) powder coated shelves, six (6) 5" (127mm) heavy duty casters — two (2) rigid and four (4) swivel with brake and rear power cord storage during transport. One (1) 1/3 horsepower compressor system utilizes 134a refrigerant, generating 2560 BTU per hour.

ORDERING INFORMATION:

- ◆ Specify Fahrenheit or Celsius at time of order.
- ◆ Specify voltage requirements.

MODEL	1000-MR2	
INTERIOR	22 gauge non-magnetic (non-corrosive) stainless steel — Four (4) removable stainless steel side racks with 50 shelf positions spaced on 1-1/4" (32mm) centers — Six (6) powder coated shelves (SH-25676) 26-1/2" x 21-3/4" (673mm x 552mm)	
INSIDE DIMENSIONS (W x D x H)	21-1/4" x 27-1/4" x 55-1/2" each cavity (540mm x 692mm x 1410mm)	
PAN CAPACITY	FULL-SIZE PANS — Forty-two (42) . . . 12" x 20" x 2-1/2" . . . (530mm x 325mm x 65mm)	GASTRONORM 1/1 — Twenty-six (26)*. 18" x 26" x 1" . . . on wire shelves only. *Additional shelves required.
ELECTRICAL	115V — 60 Hz, 1 ph. 10.8 Amps	 NEMA 5-15P 15A, 125V Plug
	220-240V — 50/60 Hz, 1 ph. 6.3 Amps	 NEMA 6-15P 15A, 250V Plug
NET WEIGHT	800 lb (363 kg)	
SHIP WEIGHT	1210 lb (549 kg)	
OPTIONS & ACCESSORIES	Plate CarriersContact Factory for Capacity — Covered "C" CarriersDC-2869 — Covered "EC" CarriersDC-23676 — Uncovered "P" CarriersDC-2868 — Uncovered "EP" CarriersDC-23580 Shelf, 26-1/2" x 21-3/4" (673mm x 552mm) — Powder CoatedSH-25676 — Stainless Steel WireSH-25677	

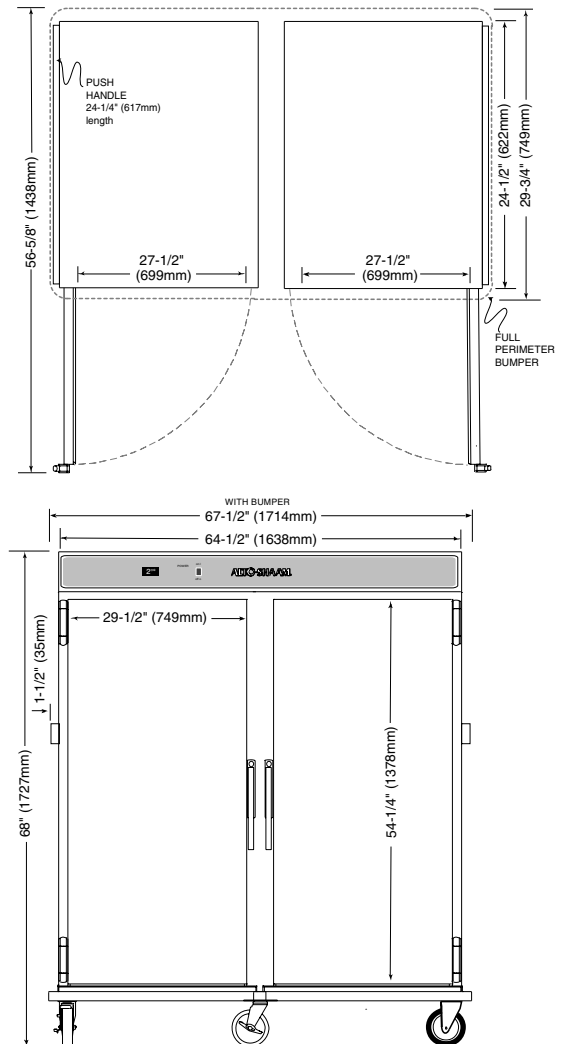

COOK/HOLD/SERVE SYSTEMS

W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

WEBSITE:

800.558.8744 U.S.A./CANADA

262.251.1907 INTERNATIONAL DIVISION

www.alto-shaam.com