

# ALTO-SHAAM® MOBILE REFRIGERATED CART

- ◆ The Alto-Shaam Mobile Refrigerated Cart is not just a refrigerator on wheels, but a well designed and efficient system for storing and transferring refrigerated food products.
- ◆ Adjustable shelves allow for the storage of plated items, pans or other items.
- ◆ Full perimeter stainless steel bumper, transport handles, heavy duty casters along with the cart's reduced height provide easy mobility.
- ◆ Electronic LED digital display monitors inside air temperature in Fahrenheit or Celsius.
- ◆ Full access front gives the operator 54" of clear, unobstructed storage.
- ◆ Non-magnetic stainless steel surfaces resists corrosion.
- ◆ Environmentally safe refrigerant.
- ◆ All mechanical equipment is easily accessible for ease in servicing.
- ◆ Rear mounted cooling coil balances and distributes air evenly.
- ◆ Condensate from the cooling coil is diverted to a condensate evaporator, therefore, it is unnecessary to have an alternate means of water disposal.

**1000-MR1**  
SINGLE CAVITY



# Sizes and Specifications



## 1000-MR1 Mobile Refrigerator



Single cavity model with 20 gauge, non-magnetic stainless steel exterior and door, fully insulated with high density foamed-in-place polyurethane. Door is hinged left as standard, and includes one (1) positive door latch with magnetic-mechanical closing and cylinder door lock. The mobile refrigerator is controlled by one (1) ON/OFF switch, with a thermostat preset at a temperature of 36°F (2°C). A LED display monitors the inside temperature. Unit includes a full-perimeter stainless steel bumper guard along with one (1) transport handle on each end of the cart and one (1) on the back of the cart for a total of three (3) transport handles. Cart is furnished with removable side racks, powder coated shelves, one (1) set of 6" (152mm) heavy duty casters — two (2) rigid and two (2) swivel with brake. A 1/4 horsepower compressor system utilizes 134a refrigerant, generating 2300 BTU (580 KCAL) per hour.

### ORDERING INFORMATION:

- ◆ Specify optional right-hand door hinging as required.
- ◆ Specify Fahrenheit or Celsius at time of order.
- ◆ Specify voltage requirements.



MODEL	1000-MR1	
INTERIOR	22 gauge non-magnetic (non-corrosive) stainless steel — Two (2) removable stainless steel side racks with 25 shelf positions spaced on 1-1/4" (32mm) centers — Three (3) powder coated shelves, 21" x 27" (533mm x 686mm) — One (1) powder coated shelf, 21" x 20" (533mm x 508mm)	
INSIDE DIMENSIONS (W x D x H)	21-1/4" x 27-1/4" x 55-1/2" (540mm x 692mm x 1410mm)	
PAN CAPACITY	FULL-SIZE PANS GASTRONORM 1/1 — Twenty-one (21) . . 12" x 20" x 2-1/2" . . (530mm x 325mm x 65mm) FULL-SIZE SHEET PANS — Thirteen (13)* . . . . 18" x 26" x 1" . . . . . on wire shelves only. — plus Three (3) additional Full-size pans . . . . 12" x 20" x 2-1/2" . . GN 1/1 (530mm x 325mm x 65mm) *Additional shelves required.	
ELECTRICAL	120V — 60 Hz, 1 ph 8.7 Amps, 855 Watts	 NEMA 5-15P 15A, 125V Plug
	220-240V — 50 Hz, 1 ph 4.4 Amps, 790 Watts	 NEMA 6-15P 15A, 250V Plug
NET WEIGHT	410 lb (186 kg)	
SHIP WEIGHT	671 lb (304 kg)	
OPTIONS & ACCESSORIES	Plate Carriers [EACH CARRIER HOLDS FOUR (4) PREPLATED MEALS] — Uncovered "P" Carriers (HOLDS 11 CARRIERS).....DC-2868 — Covered "C" Carriers (HOLDS 11 CARRIERS).....DC-2869 — Uncovered "EP" Carriers (HOLDS 8 CARRIERS).....DC-23580 — Covered "EC" Carriers (HOLDS 8 CARRIERS).....DC-23676 Powder Coated Wire Shelves — 21" x 27" (533mm x 686mm) .....SH-23963 — 21" x 20" (533mm x 508mm) .....SH-23964 Stainless Steel Wire Shelves — 21" x 27" (533mm x 686mm) .....SH-23892 — 21" x 20" (533mm x 508mm) .....SH-23893	

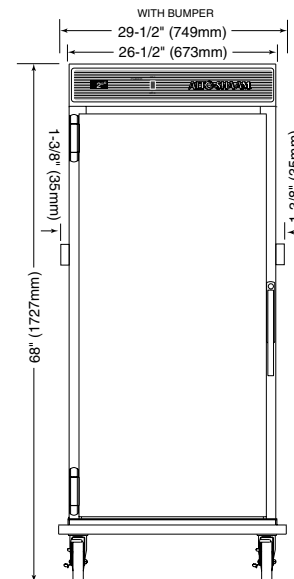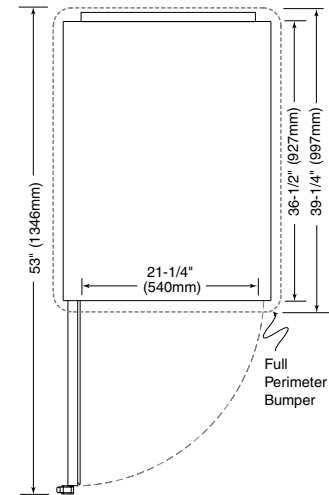

**ALTO SHAAM. COOK/CHILL/RETHERMALIZE/HOLD/SERVE SYSTEMS**

W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.  
 PHONE: 262.251.3800 FAX: 262.251.7067 800.329.8744 U.S.A. ONLY WEBSITE:  
 800.558.8744 U.S.A./CANADA 262.251.1907 INTERNATIONAL DIVISION www.alto-shaam.com