

Electrolux HD-Line

Digital refrigerators - 650 lt

The Electrolux HD-Line offers one of the most comprehensive choices of refrigerated storage cabinets available. Constructed internally and externally in stainless steel, operating over refrigeration or freezer temperature ranges, with solid or glass doors, and in a choice of either 650 or 1400 liter capacity. The refrigerator models detailed on this sheet have a capacity of 650 liters.



728402



728408

EASY TO INSTALL

- Mounted on adjustable stainless steel feet, with castors as an option.
- Choice of doors to suit varying kitchen requirements.
- Refrigerator models have operating temperatures that can be adjusted from -2°C to $+10^{\circ}\text{C}$ to suit both meat and dairy storage requirements.
- Suitable for ambient temperatures of up to $+43^{\circ}\text{C}$ in case of full door or up to $+32^{\circ}\text{C}$ in case of glass door.

EASY TO CLEAN

- Forced air circulation for rapid cool down and even temperature uniformity.
- Constructed from the highest quality AISI 304 stainless steel with radiused corners to the interior base, which is pressed from a single sheet.
- Sides and back are formed from a single sheet of stainless steel to avoid dirt traps.
- Evaporator unit is inset into the top of the refrigerated chamber to provide an obstruction free interior.
- Refrigerators are fitted with defrost outlet pipe.

EASY TO USE

- Accommodates GN 2/1 containers or shelves on anti-tilt runners.
- External digital temperature display.
- Interior light and lockable door.
- Refrigerator with automatic defrost.



Electrolux

**Electrolux HD-Line
Digital refrigerators - 650 lt**

EASY TO MAINTAIN

- Heavy-duty construction that avoids use of any plastic parts.
- Single refrigeration unit (compressor, condenser and evaporator) that can be removed in a single piece from either the top or back.
- Evaporator cover is easily removable for maintenance.

EASY ON THE ENVIRONMENT

- 20% energy consumption reduction compared to previous models.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection.

- Refrigerant type: R134a.
- CFC and HCFC free.
- All models comply with the standards required by the main international approval bodies and are H marked.

	RH06RD1F 728402	RH06RD1FL 728404	RH06RD1FR 728405	RH06RD2F 728406	RH06RD2FR 728407	RH06RD1G 728408	RH06RD1F6 728442
TECHNICAL DATA							
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10	0/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
External material							
panels	304 AISI	304 AISI	304 AISI	304 AISI	304 AISI	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.	650	650	650	650	650	650	650
Cooling unit	Built-In	Built-In	Remote	Built-In	Remote	Built-In	Built-In
Control type	Digital	Digital	Digital	Digital	Digital	Digital	Digital
External dimensions - mm							
width	750	750	750	750	750	750	750
depth/with open doors	810, 1463	810, 1463	810, 1463	810, 1463	810, 1463	810, 1474	810, 1463
height	2050	2050	2050	2050	2050	2050	2050
Min/Max internal humidity - %	75/90	75/90	75/90	75/90	75/90	65/85	75/90
N° and type of door	1	1	1	2x1/2	2x1/2	1	1
Door hinges	Right Side	Left	Right Side	Right Side	Right Side	Right Side	Right Side
N° and type of grids (included)	4, GN 2/1	4, GN 2/1	4, GN 2/1	4, GN 2/1	4, GN 2/1	4, GN 2/1	4, GN 2/1
Compressor power - HP	1/4	1/4		1/4		1/4	
N° defrost in 24 hrs.	4/20'	4/20'	4/20'	4/20'	4/20'	4/20'	4/20'
Refrigerant type	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	240	240		240		240	
Refrigeration power - W	378	378	451	378	451	448	378
Refrigerant power							
at evaporation temperature - °C	-10	-10	-10	-10	-10	-10	-10
Power - kW							
installed-electric	0.375	0.375	0.07	0.375	0.038	0.4	0.41
Net weight - kg.	138	138	113	140	115	147	138

**Electrolux HD-Line
Digital refrigerators - 650 lt**

	RH06RD1F 728402	RH06RD1FL 728404	RH06RD1FR 728405	RH06RD2F 728406	RH06RD2FR 728407	RH06RD1G 728408	RH06RD1F6 728442
INCLUDED ACCESSORIES							
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	4	4	4	4	4	4	4
2/1 GN GREY "RILSAN" GRID	4	4	4	4	4	4	4
ACCESSORIES							
1/1 GN RILSAN STEEL WIRE BASKET H=150 MM	881043	881043	881043	881043	881043	881043	881043
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456	881456	881456	881456	881456	881456	881456
2/1 GN AISI 304 S/S GRID	881067	881067	881067	881067	881067	881067	881067
2/1 GN CHROME BASKET+2 RUNNERS H200	881468	881468	881468	881468	881468	881468	881468
2/1 GN GREY "RILSAN" GRID	880720	880720	880720	880720	880720	880720	880720
2/1 GN GREY RILSAN GRID W/ 2 RUNNERS	881454	881454	881454	881454	881454	881454	881454
2/1 GN PVC CONTAINER W/LID AND 2 RUNNERS	881462	881462	881462	881462	881462	881462	881462
4 SWIVELLING WHEELS (2 W/ BRAKE)	880178	880178	880178	880178	880178		880178
ENERGY FREE ALARM DEVICE	881089	881089	881089	881089	881089	881089	881089
GN 1/1 PLASTIC CONTAINER+FALSE BOTTOM	880705	880705	880705	880705	880705	880705	880705
GN 2/1 WIRE BASKET-H-150 MM+SIDE RUNNERS	881467	881467	881467	881467	881467	881467	881467
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119	880119	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132	880132	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133	880133	880133	880133	880133
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166	
KIT PLINTH TO INSTALL HD REF. 550/650L	880206	880206	880206	880206	880206	880206	880206
KIT TO FIT 11 PASTRY TRAYS (400X600 MM)	881031	881031	881031	881031	881031	881031	881031
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451	881451	881451	881451	881451	881451	881451
PEDAL OPENING FOR 550/650 L REFRIGERATOR	881458	881458	881458			881458	881458
PERFORATED SHELF GN 2/1	881042	881042	881042	881042	881042	881042	881042
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457	881457	881457
REMOTE UNIT -2+10°C FOR 550/650 L			881463		881463		
SET OF 8-1/1 GN PVC CONTAINERS FOR FISH	881461	881461	881461	881461	881461	881461	881461


HAB010

2009-10-06

Subject to change without notice

**Electrolux HD-Line
Digital refrigerators - 650 lt**

728406, 728407

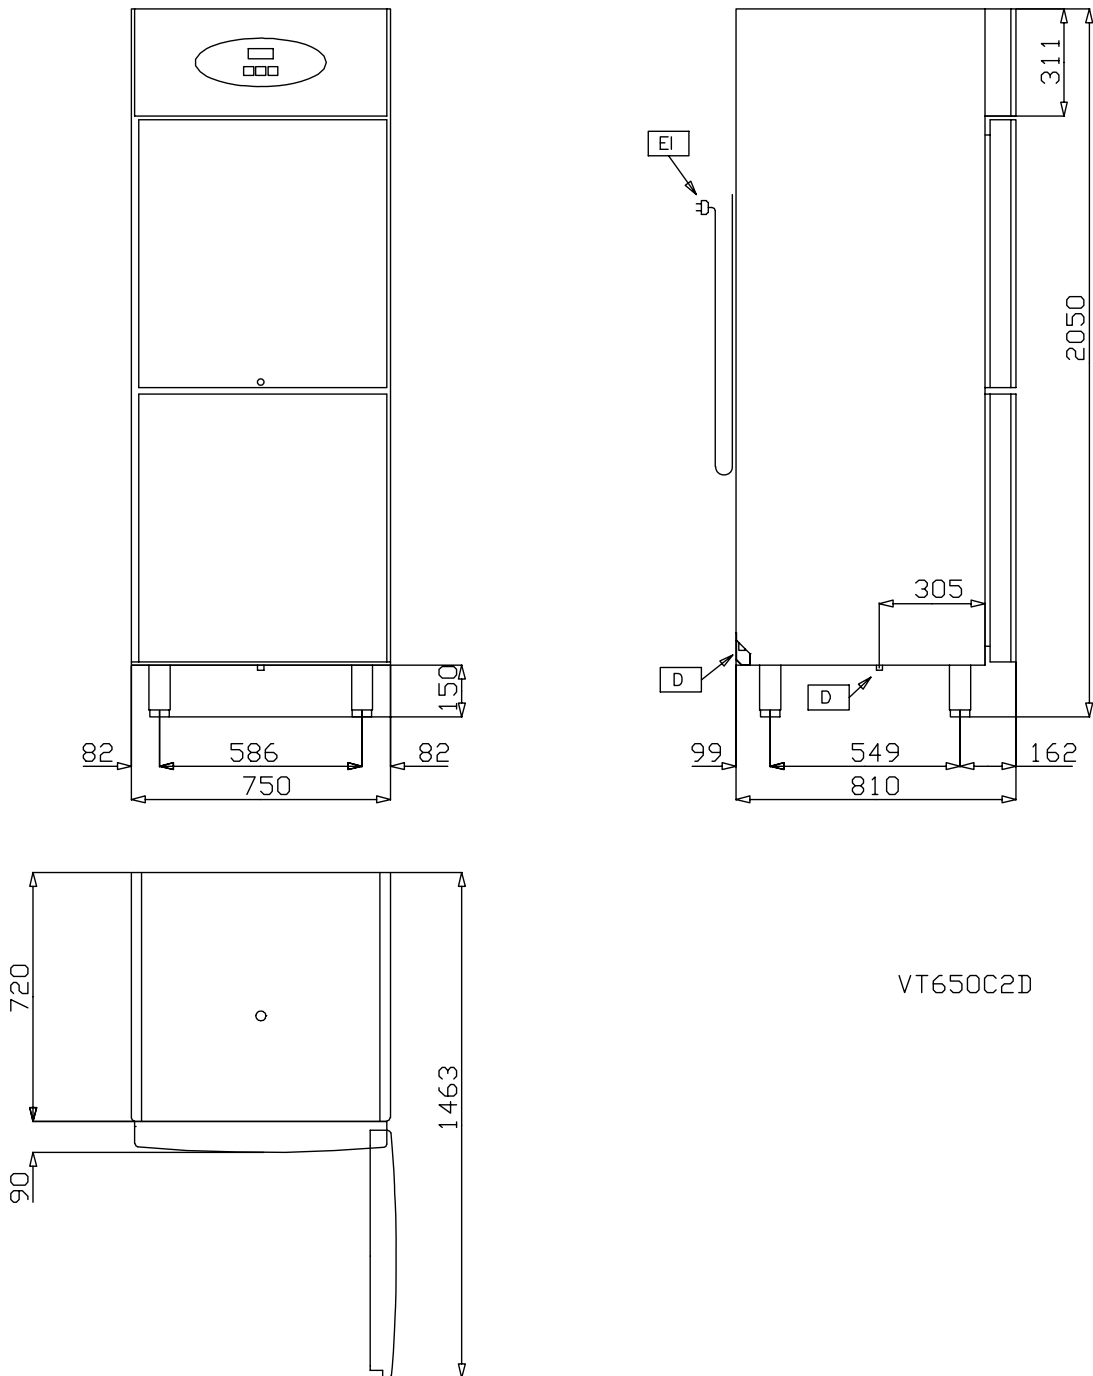

VT650C2D

LEGEND	RH06RD2F 728406	RH06RD2FR 728407
	D - Water drain	1/2"
ED - Remote electrical connection		●
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50
RI - Remote refrigeration connection		●


HAB010

2009-10-06

Subject to change without notice

Electrolux HD-Line
Digital refrigerators - 650 lt

728408

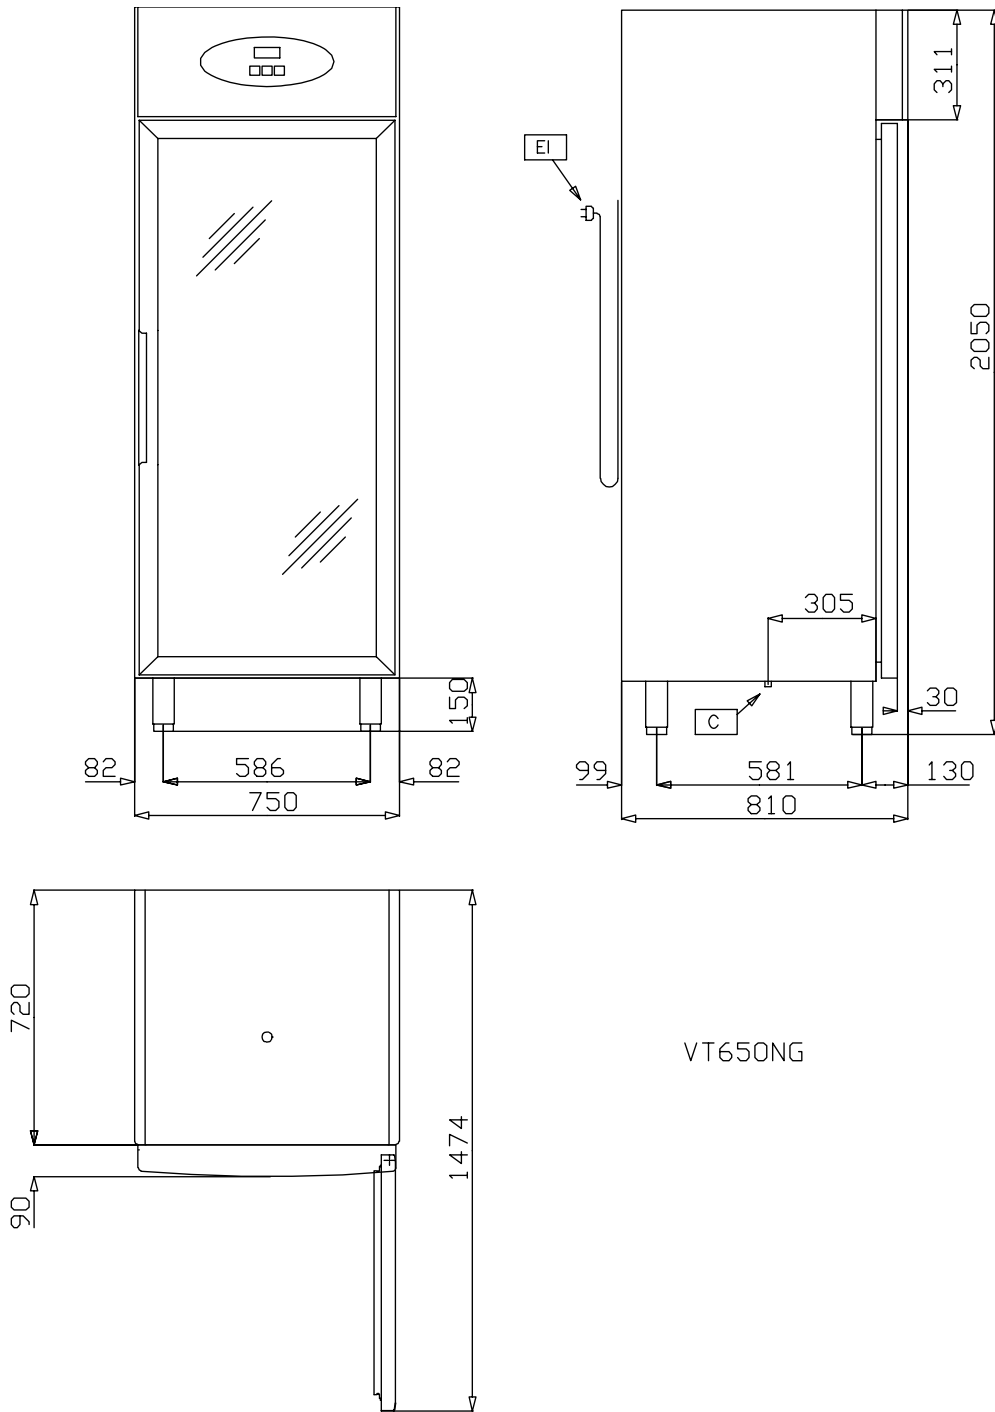

VT650NG

LEGEND D - Water drain EI - Electrical connection	RH06RD1G 728408
	1/2"
	230 V, 1N, 50


HAB010

2009-10-06

Subject to change without notice

Electrolux HD-Line
Digital refrigerators - 650 lt

728442

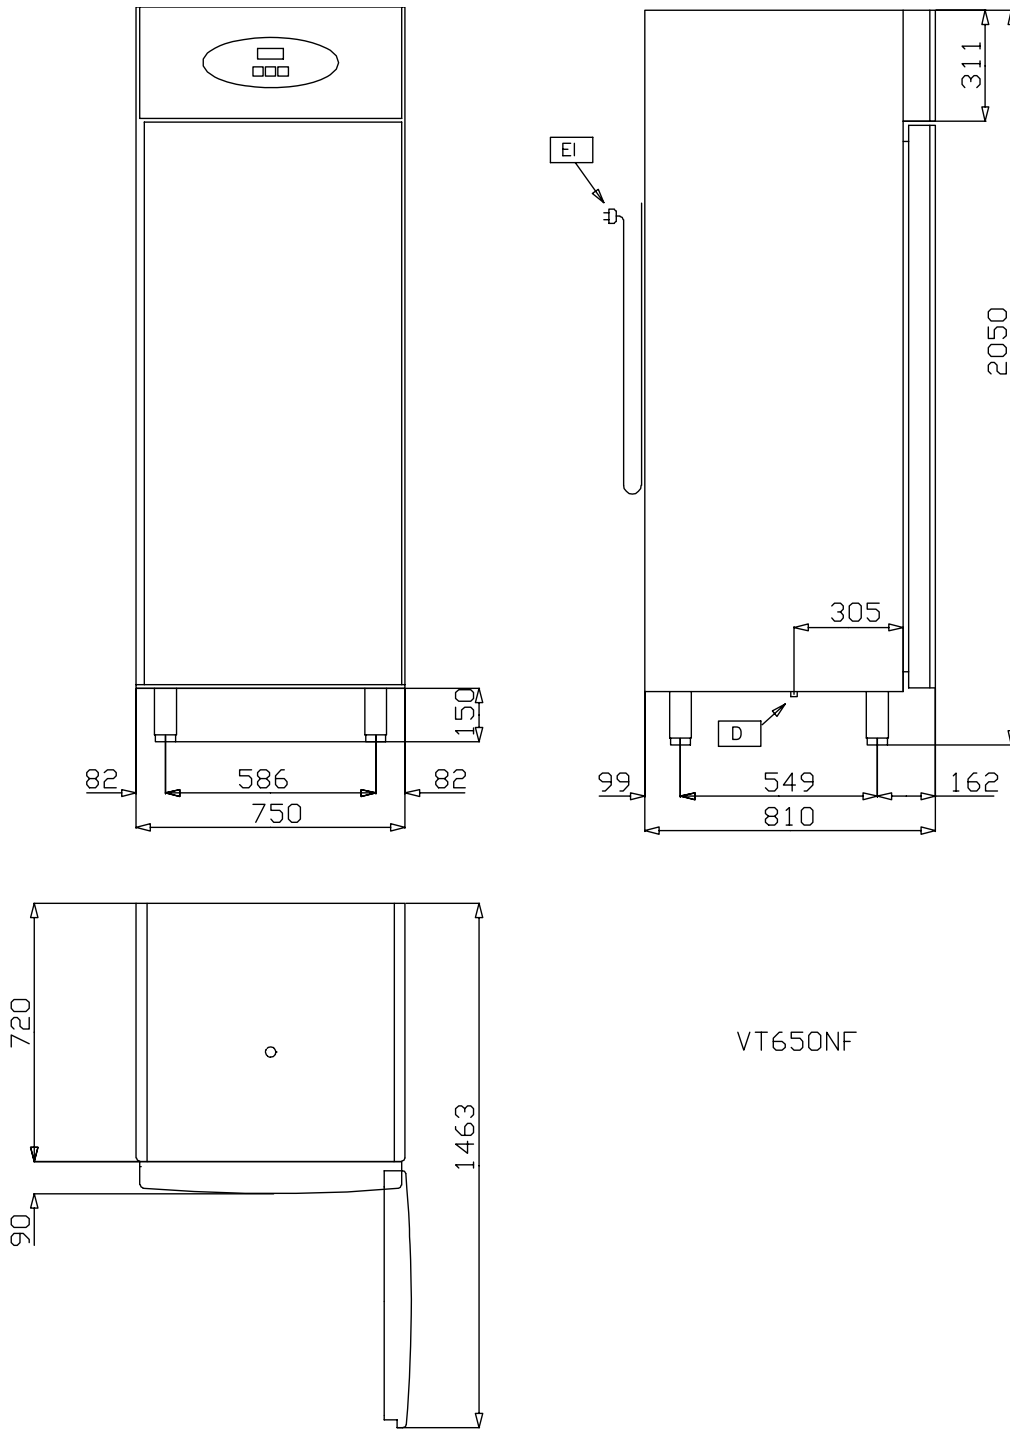

LEGEND D - Water drain EI - Electrical connection	RH06RD1F6 728442
	1/2"
	220 V, 1N, 60

HAB010

2009-10-06

Subject to change without notice