



Title

ROAD SIDE FLASHER TYPE MFLA2

USERS MANUAL

Document Number

59-078-12

Issue

04



DO NOT CHANGE WITHOUT APPROVAL OF MSHA

REVISION CONTROL

04	Add MSHA and ATEX certification info	2008.09.15	PB'	PB'	JY
03	Add magnet warning statement	2008.06.13	PB'	PB'	JY
02	MSHA Text Addition	2006.04.26	JY	JY	PB'
01	Original issue	2005.04.18	PB'	JY	PB
Issue	Details	Date	Drawn	Designed	Approved

Austdac Pty Ltd

Unit 1 / 4 Packard Avenue
Castle Hill NSW 2154
Australia

PO Box 6486
Baulkham Hills Business Centre
NSW 2153
Australia

Phone: + 61 2 8851 5000
Fax: + 61 2 9899 2490
Website: www.austdac.com.au

Copyright 2005-04-18

This document remains the property of Austdac Pty. Ltd. It is subject to its recall and must not be reproduced in part or whole or its contents divulged to third parties without prior written approval from Austdac Pty Ltd.

TABLE OF CONTENTS

General description..... 3
 Ordering information..... 4
 Installation..... 4
 User wiring..... 5
 Certification..... 5
 Safe use..... 5
 Specifications..... 6

PHOTOGRAPHS

Photograph 1 MFLA2-SB-XX Basic Roadside Flasher 3
 Photograph 2 MFLA2-EC-XX Roadside Flasher with external 3m control cable 4

FIGURES

Figure 1 Type number description..... 4

TABLES

Table 1 MFLA2-EC-XX Intrinsic safety entity parameters..... 5

DO NOT CHANGE WITHOUT APPROVAL OF MSHA

GENERAL DESCRIPTION

The Roadside Flasher type MFLA2 is a portable explosion protected (Ex ia) LED based self-flashing strobe designed for use as a semi permanent beacon that may be placed near a hazard such as hard to see disabled road plant or unsafe roof. The MFLA2 is ideally suited to hazard warning applications in hazardous areas such as underground coalmines. The Roadside Flasher is provided with a powerful base mounted magnet to allow it to be quickly and easily attached to a break down, alternatively the Flasher can be mounted by hanging it using an 's' hook or piece of wire. The unit may be mounted in any orientation. Once mounted in place, pressing the on-off switch will start the MFLA2 flashing.

The MFLA2 will continue to flash until it is switched off, but will function continuously for six months on one set of batteries. The flash of light emitted by the Roadside Flasher covers a full 360-degree pattern. The MFLA2 is available in the five colours, red, green, yellow, blue and white. This allows the user to select a colour best suited for the hazard or warning type.

The unit may also be provided with an attached control lead, see photograph 2, to allow the Road Side Flasher to be controlled by a set of voltage free switching contacts such as those on a pressure or level switch. This control allows the MFLA2 to be used in 'non-powered' alarm and warning annunciation applications throughout an underground mine.



Photograph 1. The basic Roadside Flasher type MFLA2

Pressing the on-off-on push button switch located in the top centre of the lens will activate the Road Side Flasher. Access to this switch is via the large central hole in the lens guard plate.

DO NOT CHANGE WITHOUT APPROVAL OF MSHA

ORDERING INFORMATION

The MFLA2 is available in the following configurations and colours:

MFLA2 – FF – CC

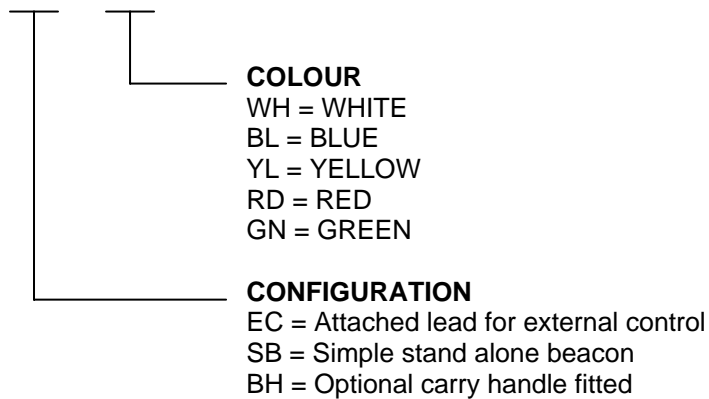


Figure 1. Type number description

INSTALLATION

The installation of the MFLA2-SB-XX is simply a matter of fixing or attaching the Roadside Flasher in place and turning it on with the push-on / push-off switch located in the top centre of the lens.

The installation of the MFLA2-EC-XX is also straightforward, the Roadside Flasher is fixed in place and the external control lead routed to the control equipment and terminated. The external control lead should be routed and terminated in accordance with the AS2381.7 and AUS Ex 03.4003X. The installation should be tested for functionality to ensure that the lens mounted push-on / push-off switch is in the on position.



Photograph 2. MFLA2-EC-XX with attached 3m control lead.

The many holes in the lens guard plate may be used, with the aid of 'S' hooks or tie wire, to hang or secure the Road Side Flasher in place if the base mounted magnet is not practical. The on-off-on switch in the centre of the lens is visible through the large central hole of the lens guard plate. See photograph 2 above.

DO NOT CHANGE WITHOUT APPROVAL OF MSHA

USER WIRING

The wiring connections to the type MFLA2-EC-XX are via a three-metre lead with two 0.75mm² conductors. The external control lead has a braided screen that is not terminated within the MFLA2-EC-XX. This braid may be connected to earth or left unterminated; it should not be connected to any other circuit. The external control lead should not be extended beyond 100 metres for voltage drop considerations. The standalone beacon version, MFLA2-SB-XX, does not have an external control cable.

CERTIFICATION

The Roadside Flasher type MFLA2 is certified for use in Group I hazardous areas and has been awarded IECEx (**IECEX ITA 07.0013X**) and ATEX (**Nemko 08ATEX1325X**) certification. The MFLA2 has also been awarded MSHA approval (**MSHA 18-080010-0**) The MFLA2-SB-XX (stand alone beacon) requires no system assessment before it is deployed or used within the hazardous area. The MFLA2-EC-XX (external control) on the other hand requires that the entity concept parameters listed in table 1 be taken into account when installed into a system.

MFLA2-EC-XX ENTITY PARAMETERS		
Maximum output voltage of control lead	U _o	6.6V
Maximum output current of control lead	I _o	125mA
Maximum capacitance that may be attached to control lead	C _o	11.7uF
Maximum inductance that may be attached to control lead	L _o	20uH
Maximum L/R ratio of any cable connected to the MFLA2-EC-XX	L _o /R _o	2.1mH/Ω
Maximum external voltage that may be connected to the control lead	U _i	0V

Table 1 MFLA2-EC-XX Entity Parameters

The MFLA2-EC-XX Road Side Flasher is designed to be controlled from the voltage free contacts of simple apparatus such as level or pressure switches, or from voltage free contacts of control relays. The U_i parameter of the MFLA2-EC-XX dictates that the contacts be voltage free i.e. no external voltages are to be applied to the contacts connected the control lead of the flasher. The U_i parameter also requires that the voltage free contacts shall be segregated from the relay coil and other intrinsically safe circuits in accordance with clause 4.x of AS60079-11. A system design / installation evaluation shall also be carried out in accordance with AS60079-25. Note that the capacitance and inductance of the supplied external control lead have not been taken into account in the above entity parameters. The MSHA approval does not apply to the MFLA2-EC-XX, this variant should not be sold in the USA.

SAFE USE

The Roadside Flasher type MFLA2 has a powerful magnet in its base to allow it to be easily attached to machinery or vehicles. This magnet may interfere with certain types of remote control equipment and cause unplanned movements of plant. Do **not** allow the magnet of the MFLA2 base to come within 1 metre of any magnetically actuated or sensitive remote control equipment.

DO NOT CHANGE WITHOUT APPROVAL OF MSHA

SPECIFICATIONS

Basic body colour	Yellow / Black
Mounting or attachment	Base magnet or 's' hook to guard plate
Mounting orientation	Any orientation
Battery life (operating)	> 6 months
Battery life (shelf)	> 24 months
Flash rate	~1Hz
Flash colour	Red, Green, Yellow, Blue and White
Luminous intensity red	> 12,000 mcd
Luminous intensity green	> 18,000 mcd
Luminous intensity yellow	> 12,000 mcd
Luminous intensity blue	> 5,400 mcd
Luminous intensity white	> 20,000 mcd
External control lead length	3m
External control lead overall diameter	6mm
External control lead conductor size	0.75mm ² , 24/0.2 strands
External control lead self capacitance	150pF / m
External control lead self inductance	1uH / m
External control lead self L/R ratio	50uH / Ω
Size	140mm high x 100mm diameter
Ingress protection	IP66
Mass	< 2000g