



straightpoint

world leaders in load monitoring technology

2012 catalog



Since 1976 Straightpoint has been the world leader in the design and manufacture of a huge range of force measurement, load monitoring and suspended weighing load cells up to over 1,000 tons capacity.

At our factory in southern England our engineering team designs and manufactures a broad spectrum of first class products including:

- Tension 'Link' loadcells
- Telemetry loadcells
- Shackle Loadcells
- Compression loadcells
- Loadpins
- Data logging software

All products are tested fully and are shipped in aluminum flight case (or wooden crate for large capacities) for next day shipment with full documentation including manuals and certificates of calibration/proof test and CE conformity.

We also offer world class calibration and repair services for all models and manufacturer's loadcells and we hold a large stock of loadcells available for short or long term rental.

Our products are used within many industries around the world:

- Shipping and marine
- Testing
- Mining
- Transport
- Health and safety
- Crane and rigging
- Oil and gas
- Construction
- Power generation
- Utilities

With hundreds of units always in stock we aim to deliver any standard product right up to over 1000 tons capacity anywhere in the world - FAST!

Straightpoint continues to invest in research and development, the ongoing upgrade of equipment and constantly working on improving product performance to meet our customers demands. We remain at the forefront of technology.

Contents

All products within this catalogue include proof testing, calibration certificates and full calibration to NPL (National Physical Laboratory, London).

All products are supplied with a carry case, battery and user manual.



Page Number

DESCRIPTION

02-03	Loadlink Plus
04-05	Radiolink Plus
06-07	InConcert™
08-09	Wireless Shackle Loadcells
10-11	Wireless Center of Gravity System
12-13	Wireless Accessories
14-15	Shackle Loadcells
16-17	Miniweigher Plus
18-19	Jumboweigher
20-21	Loadblock Plus
22-23	Compression Loadcells
24-25	Accessories/Notes

Payment Methods

We accept US DOLLARS.



Accreditations and Approvals

Straightpoint is a member of the AWRF (Associated Wire Rope Fabricators).



Contact

USA Address:

Straightpoint, Inc.
4040 Adolfo Road,
Camarillo
CA 93012

Telephone: Toll Free: (866) 920-3000 or (805) 642-3034

Fax: (805) 642-4034

Email: sales@straightpoint.com

Web: www.straightpoint.com

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922


Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800


Panama City, FL
(850) 769-1120



loadlink plus



The original electronic force measurement device with integral display. In production since 1979, this is the latest version of this world renowned product. All LLP's have push button control for: tare, units (lbs, kg, kN & tonnes), peak hold, pre set tare, audible setpoint alarm and overload counter. Remote output is fitted as standard allowing connection to our range of accessories. All models are supplied with carry/storage case.

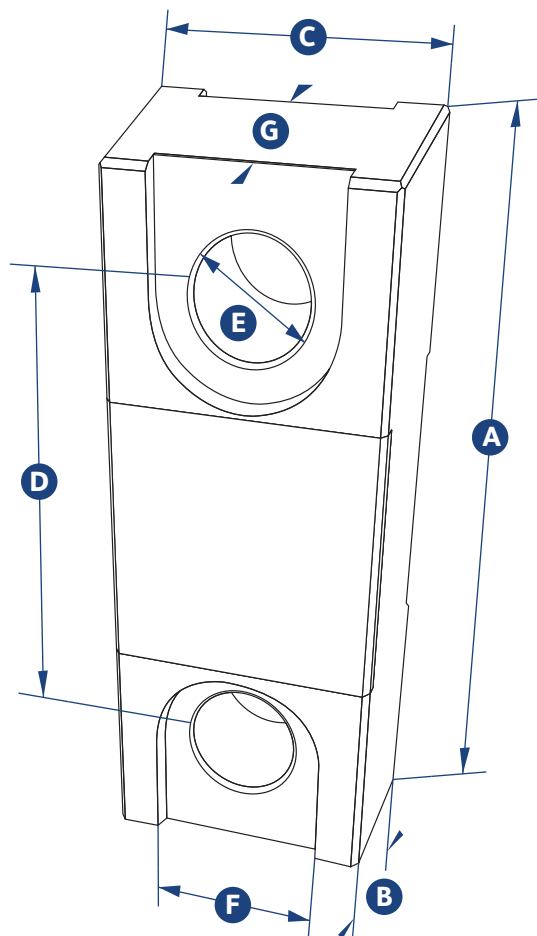

Specifications (inches)

Part Number	LLP1TU	LLP2T5U	LLP5TU	LLP12TU	LLP25TU	LLP35TU	LLP50TU	LLP75TU	LLP100TU	LLP150TU	LLP200TU	LLP250TU	LLP300TU	LLP500TU
Capacity	2200lb	5500lb	11000lb	26000lb	55000lb	77000lb	110000lb	165000lb	220000lb	330000lb	440000lb	550000lb	660000lb	999000lb
Resolution	1lb	2lb	2lb	5lb	10lb	10lb	20lb	20lb	100lb	100lb	200lb	200lb	200lb	500lb
Units	lbs, te, kN, kg													
Weight	3.3lb	3.3lb	4.8lb	7.7lb	11.5lb	20lb	24lb	40lb	82lb	112lb	176lb	176lb	290lb	484lb
Safety Factor	12:1	5:1	5:1	5:1	5:1	5:1	5:1	5:1	4:1	4:1	5:1	4:1	4:1	3:1
Battery Type	9v													
Battery Life	80 hours continuous													
Display Type	6 digit 1" LCD													
Protection	NEMA 4X / IP65													
Op Temp	14°F - 122°F													
Accuracy	± 0.3 % of applied load													
Dimension A	8.03	8.03	9.80	12.01	13.39	15.47	16.69	18.50	23.94	26.38	27.56	27.56	31.73	36.61
Dimension B	1.69	1.69	1.69	1.85	2.36	2.95	2.95	2.95	3.90	3.90	5.67	5.67	5.91	5.91
Dimension C	3.98	3.98	3.98	3.98	4.53	4.96	6.42	7.95	10.04	11.93	12.60	12.60	16.77	22.44
Dimension D	5.75	5.75	6.50	7.60	8.46	8.86	9.06	10.24	12.60	14.17	13.78	13.78	13.78	17.72
Dimension E	0.96	0.96	1.50	1.87	2.17	2.36	2.99	2.99	4.29	4.29	5.20	5.20	6.30	7.87
Dimension F	1.89	1.89	2.60											
Dimension G	0.75	0.75	1.26											
Crosby Shackle	G209 or G210						G2130 or G2140							G2160
Loading Pin Ø	3/4"	3/4"	1"	1 3/8"	2"	2 1/4"	2 1/4"	2 3/4"	3 1/4"	3 3/4"	4 3/4"	5"	6"	7"

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800

Panama City, FL
(850) 769-1120

july2012
03



radiolink plus

**Wall or Cab
Mount Bracket**

available for handheld


Part No.
SU3282

SP
Radiolink plus

Max: 11,000lb x 2lb



Licence exempt radio version of the popular Loadlink with 800 foot range.
Supplied with easy to use three button handheld with push button control for tare and on/off and peak hold.
Radiolink is fitted with standard alkaline batteries and has no external antenna.
Audible overload alarm 90db. Calibrated in lbs.
May also be connected to a PC using our 'Desktop Controller' software package.
All models are supplied with carry/storage case.

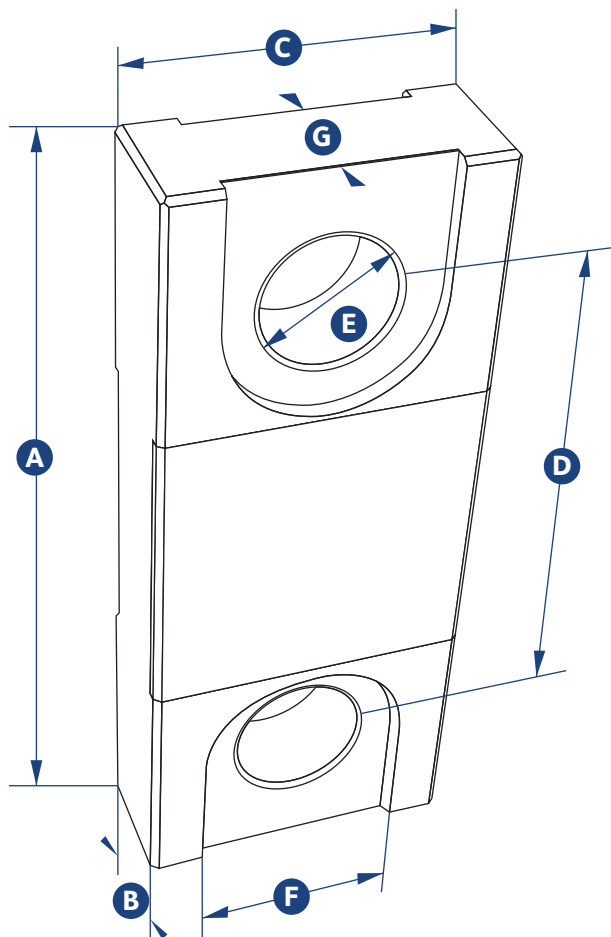

Part Number	RLP1TU	RLP2T5U	RLP5TU	RLP12TU	RLP25TU	RLP35TU	RLP50TU	RLP75TU	RLP100TU	RLP150TU	RLP200TU	RLP250TU	RLP300TU	RLP500TU
Capacity	2200lb	5500lb	11000lb	26000lb	55000lb	77000lb	110000lb	165000lb	220000lb	330000lb	440000lb	550000lb	660000lb	999000lb
Resolution	1lb	2lb	2lb	5lb	10lb	10lb	20lb	20lb	100lb	100lb	200lb	200lb	200lb	500lb
Units	lb	lb	lb	lb	lb	lb	lb	lb	lb	lb	lb	lb	lb	lb
Weight	3.3lb	3.3lb	4.8lb	7.7lb	11.5lb	20lb	24lb	40lb	82lb	112lb	176lb	176lb	290lb	407lb
Safety Factor	12:1	5:1	5:1	5:1	5:1	5:1	5:1	5:1	4:1	4:1	5:1	4:1	4:1	3:1
Battery Type	Handheld-2 x AA / Loadcell 4 x AA													
Battery Life	Handheld-400hrs / Loadcell 1600hrs continuous if using Lithium batteries													
Display Type	7 digit 0.35"mm LCD													
Protection	NEMA 4X													
Op Temp	14°F - 122°F													
Accuracy	± 0.3 % of applied load													
Frequency	2.4GHz													
Range	800 feet													
Data Rate	1 update per second													
Dimension A	8.03	8.03	9.80	12.01	13.39	15.47	16.69	18.50	23.94	26.38	27.56	27.56	31.73	36.61
Dimension B	1.69	1.69	1.69	1.85	2.36	2.95	2.95	2.95	3.90	3.90	5.67	5.67	5.91	5.91
Dimension C	3.98	3.98	3.98	3.98	4.53	4.96	6.42	7.95	10.04	11.93	12.60	12.60	16.77	22.44
Dimension D	5.75	5.75	6.50	7.60	8.46	8.86	9.06	10.24	12.60	14.17	13.78	13.78	13.78	17.72
Dimension E	0.96	0.96	1.50	1.87	2.17	2.36	2.99	2.99	4.29	4.29	5.20	5.20	6.30	7.87
Dimension F	1.89	1.89	2.60											
Dimension G	0.75	0.75	1.26											
Crosby Shackle	G209 or G210						G2130 or G2140							G2160
Loading Pin Ø	3/4"	3/4"	1"	1 3/8"	2"	2 1/4"	2 1/4"	2 3/4"	3 1/4"	3 3/4"	4 3/4"	5"	6"	7"

Specifications (inches)

Houston, TX
(713) 674-2266
New Iberia, LA
(337) 369-3903

Beaumont, TX
(409) 729-9187
New Orleans, LA
(504) 496-0196

B
**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922
Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800
Panama City, FL
(850) 769-1120

july2012
05



in concert™

Advanced Handheld

must be ordered with each system

Part No.
T24-HA



Wall or Cab Mount Bracket

available for handheld

Part No.
SU3282

Based on the Radiolink plus loadcell, the In Concert™ system allows you to connect several Radiolinks to a single advanced handheld display and view individual loads and a total load (up to a maximum of 12 Radiolinks in a single system). Calibrated in lbs, other units are available on request. All models are supplied with carry/storage case.

Select how many Radiolinks you require and then add the advanced handheld along with any other options you may need.

in concert™



Part Number	CP1TU	CP2TSU	CP5TU	CP12TU	CP25TU	CP35TU	CP50TU	CP75TU	CP100TU	CP150TU	CP200TU	CP250TU	CP300TU	CP500TU
Capacity	2200lb	5500lb	11000lb	26000lb	55000lb	77000lb	110000lb	165000lb	220000lb	330000lb	440000lb	550000lb	660000lb	999000lb
Resolution	1lb	2lb	2lb	5lb	10lb	10lb	20lb	20lb	100lb	100lb	200lb	200lb	200lb	500lb

Houston, TX
(713) 674-2266

New Iberia, LA
(337) 369-3903

Beaumont, TX
(409) 729-9187

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800

Panama City, FL
(850) 769-1120

july2012
07



wireless shackle loadcells

Wall or Cab Mount Bracket


available for handheld

Part No.
SU3282



Simple to install wireless version bow shackle loadcell range from 2200 to 880,000lbs capacity.
Constructed from high tensile carbon steel.
Sealed to NEMA 6 standards.
Proof tested to 150 % of normal rated load.
Supplied with our standard Radiolink handheld display for use up to 400 feet.

wireless shackle loadcells

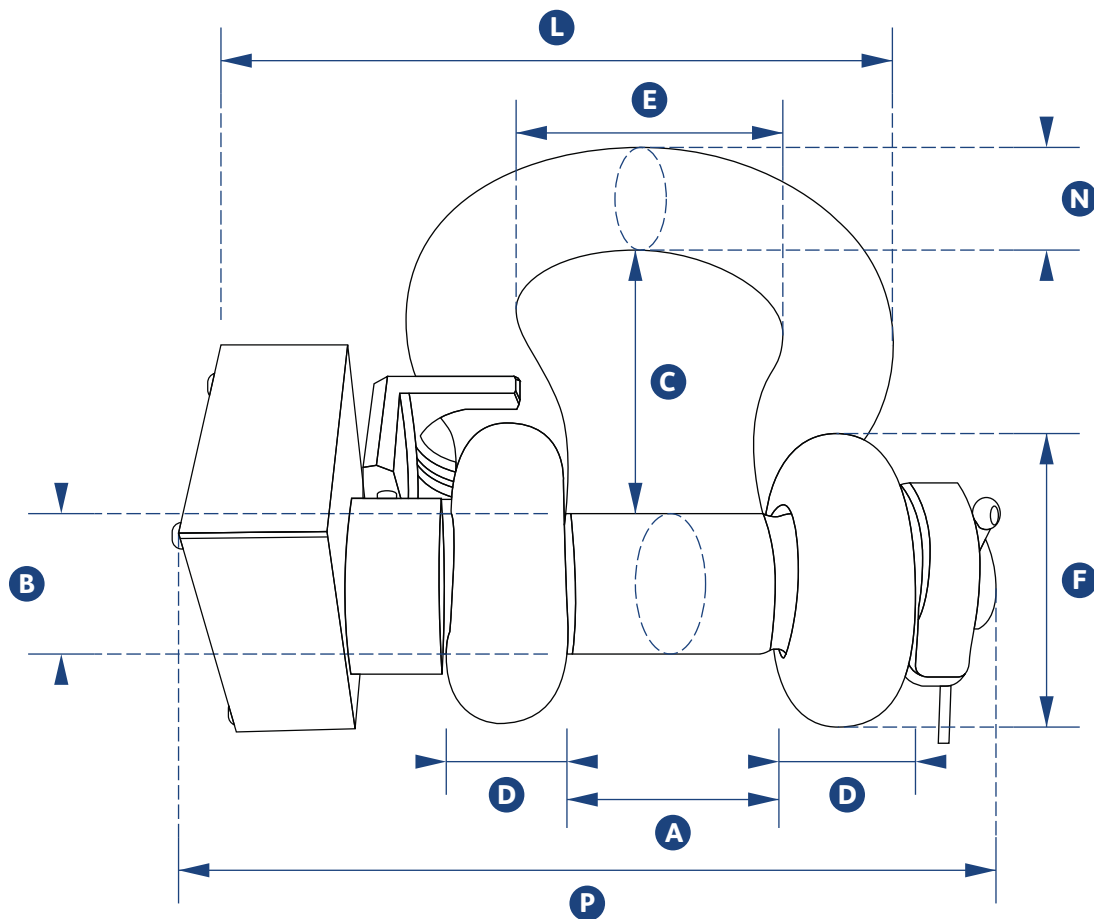

Specifications (inches)

Part Number	WLS1TU	WLS3.25TU	WLS6.5TU	WLS12TU	WLS17TU	WLS25TU	WLS55TU	WLS85TU	WLS120TU	WLS200TU	WLS300TU	WLS400TU
Capacity	2200lb	7150lb	14300lb	26400lb	37400lb	55000lb	120000lb	185000lb	260000lb	440000lb	660000lb	880000lb
Resolution	2lb	10lb	10lb	20lb	50lb	50lb	100lb	100lb	200lb	200lb	1000lb	1000lb
Units	lbs											
Weight	4.4lb	6.16lb	7lb	17.6lb	26.4lb	40lb	55lb	99lb	187lb	473lb	801lb	1144lb
Safety Factor	300 % of rated load											
Battery Type	Handheld-2 x AA Alkaline / Loadcell >12t 2 x AA alkaline & 17t> 2 x AAA NiHy rechargeables											
Battery Life	Handheld - 400hrs / Loadcell >12t 350hrs & 17t> 200hrs continuous											
Display Type	7 digit 0.35" LCD											
Op Temp	-4°F - 158°F											
Accuracy	±1 %											
Frequency	2.4GHz											
Range	400 feet											
Data Rate	3 updates per second											
Protection	NEMA 6											
Dimension A	0.66	1.06	1.44	2.03	2.38	2.87	3.25	4.13	5.00	7.24	8.39	8.27
Dimension B	0.44	0.75	1.00	1.38	1.63	2.01	2.24	2.76	3.25	4.76	5.98	7.01
Dimension C	1.44	2.38	3.31	4.69	5.75	7.01	7.76	10.51	12.99	15.63	19.49	22.52
Dimension D	0.38	0.63	0.88	1.25	1.50	1.75	2.01	2.62	2.99	3.76	4.76	6.50
Dimension E	1.03	1.69	2.28	3.25	3.88	5.00	6.46	7.24	7.87	10.98	12.99	12.99
Dimension F	0.91	1.50	2.09	2.99	3.62	4.17	4.80	5.71	6.50	10.51	12.01	14.02
Dimension H	2.48	4.17	5.83	8.27	10.00	12.32	13.70	17.83	21.50	29.25	35.24	40.24
Dimension L	2.92	4.07	5.16	6.89	8.03	10.00	11.10	14.02	15.51	22.13	26.14	27.13
Dimension N	0.38	0.69	0.97	1.38	1.62	2.24	2.40	3.11	3.62	5.98	6.77	7.24
Dimension P	2.17	3.52	4.72	6.50	7.72	9.06	10.39	13.54	16.50	20.51	24.33	27.95

(Larger capacities than those listed, price on application)

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800


Panama City, FL
(850) 769-1120

july2012

09



wireless centre of gravity system

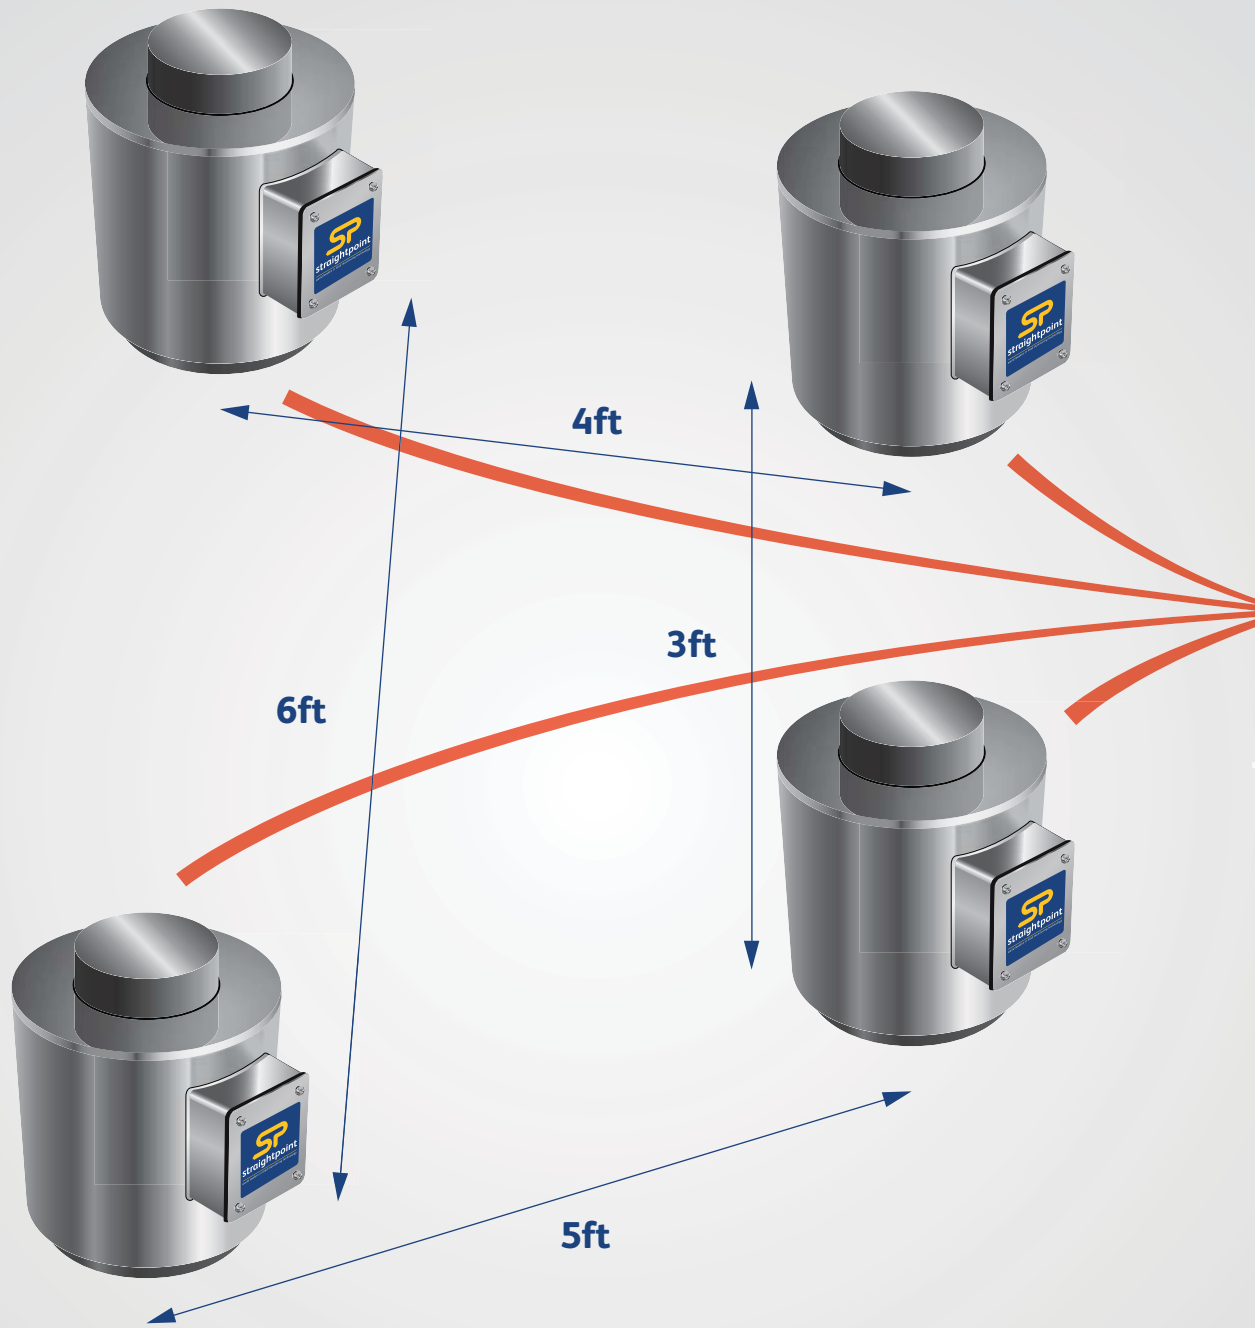

Our wireless center of gravity system uses telemetry compression loadcells and a simple to use but powerful software package to analyse individual loadcell loads in real-time and print / save a full center of gravity analysis report.

Between 3-8 loadcells of the same capacity can be used at any one time.


Once number of loadcells has been decided, the software must be ordered

Part No.
WCOGS



Letter report example

wireless
center of gravity system

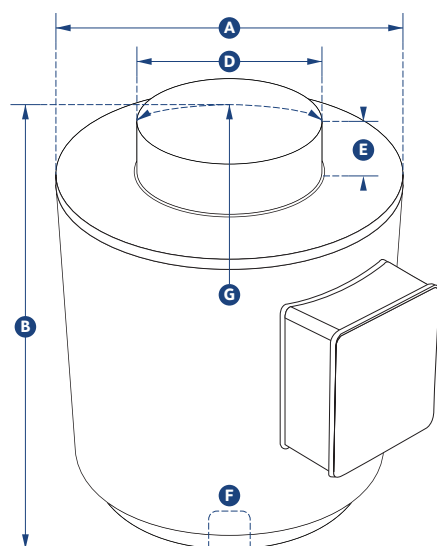

Choose loadcells (between 3-8) from table below and then add **WCOGS** software.

Part Number	WNI50TCU	WNI100TCU	WNI150TCU	WNI300TCU	WNI500TCU
Capacity	110000lb	220000lb	330000lb	660000lb	1100000lb
Resolution	50lb	200lb	200lb	500lb	1000lb
Weight	13.64lb	34lb	34lb	143lb	143lb
Safety Factor	3:1				
Protection	NEMA 4X				
Operating Temp	-40°F - 149°F				
Accuracy	± 0.3 %				
Battery Type	AA				
Battery Life	300 hours				
Frequency	2.4GHz				
Range	800 feet				
Data Rate	1 update per second				
Dimension A	4.02	5.98	5.98	7.28	7.28
Dimension B	5.00	7.24	7.24	11.81	11.81
Dimension D	2.32	3.15	3.15	6.10	6.10
Dimension E	0.51	1.02	1.02	1.08	1.08
Dimension F	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5
Dimension G	5.98	17.01	17.01	17.01	17.01

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800



Panama City, FL
(850) 769-1120

july2012

11





wireless accessories





T24-RM1A

Supplied with an audiovisual alarm, the T24-RM1 can be programmed to any Radiolink to monitor loads. Then at a preset point the alarm will activate and open or close a >240VAC, 5 amp relay. Ideal for use in a wireless overload detection system. 110-240VAC.



T24-A01i

Provides a configurable analog output for the range of Straightpoint wireless loadcells and is housed in NEMA 4X housing for industrial installation. The output can be selected from the pre-calibrated voltage and current ranges. 0-10Volts, ± 10 Volts, 0-5Volts, ± 5 Volts, 0-20mA, 4-20mA. Useful for integrating with a PLC.



T24-S0


This module generates a programmable RS232 serial output ASCII string which can include data from up to 8 Compound plus loadcells as well as optionally sum them. The output is suitable for connecting to many devices that require simple serial RS232 input.

Our range of wireless accessories may be used with the Radiolink, In Concert™ or wireless loadshackle ranges.




RDCP

Wireless Windows-based software that allows the operator full remote control of the loadcell. Can be set to datalog (time/date and load) into a spreadsheet by user input time interval (min 3 hertz). Can generate a single load report. A spare USB port is required.

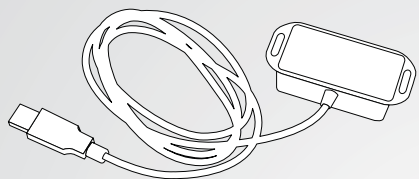


T24LOG24

This software for Windows PC's allows up to 24 of our wireless loadcells (Radiolink or Wireless Loadshackles) to be viewed and logged cable free to a CSV file. You can configure the number of loadcells (max 24), and set extra channels to sum data or record peaks etc. These configurations can be saved and re-loaded at any time.

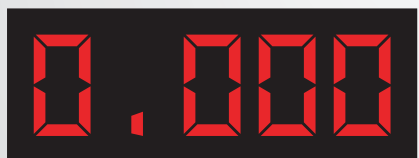

T24-SOSD

5" high red LED slave display that will wirelessly display the load on a Radiolink. Suitable for mounting on a crane gantry, requires mains power. 110-240VAC.

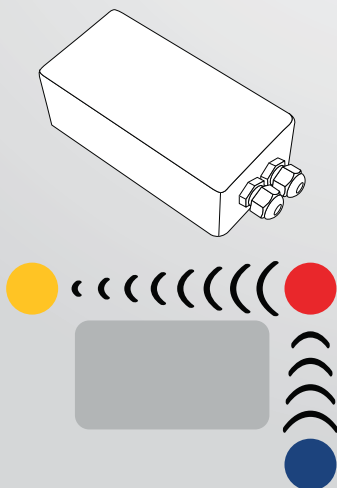

T24-AR

The T24 Active Repeater module will enable the transmission from any of our wireless loadcells to span around obstacles and increase range or coverage.

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922


Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800

Panama City, FL
(850) 769-1120




shackle loadcells

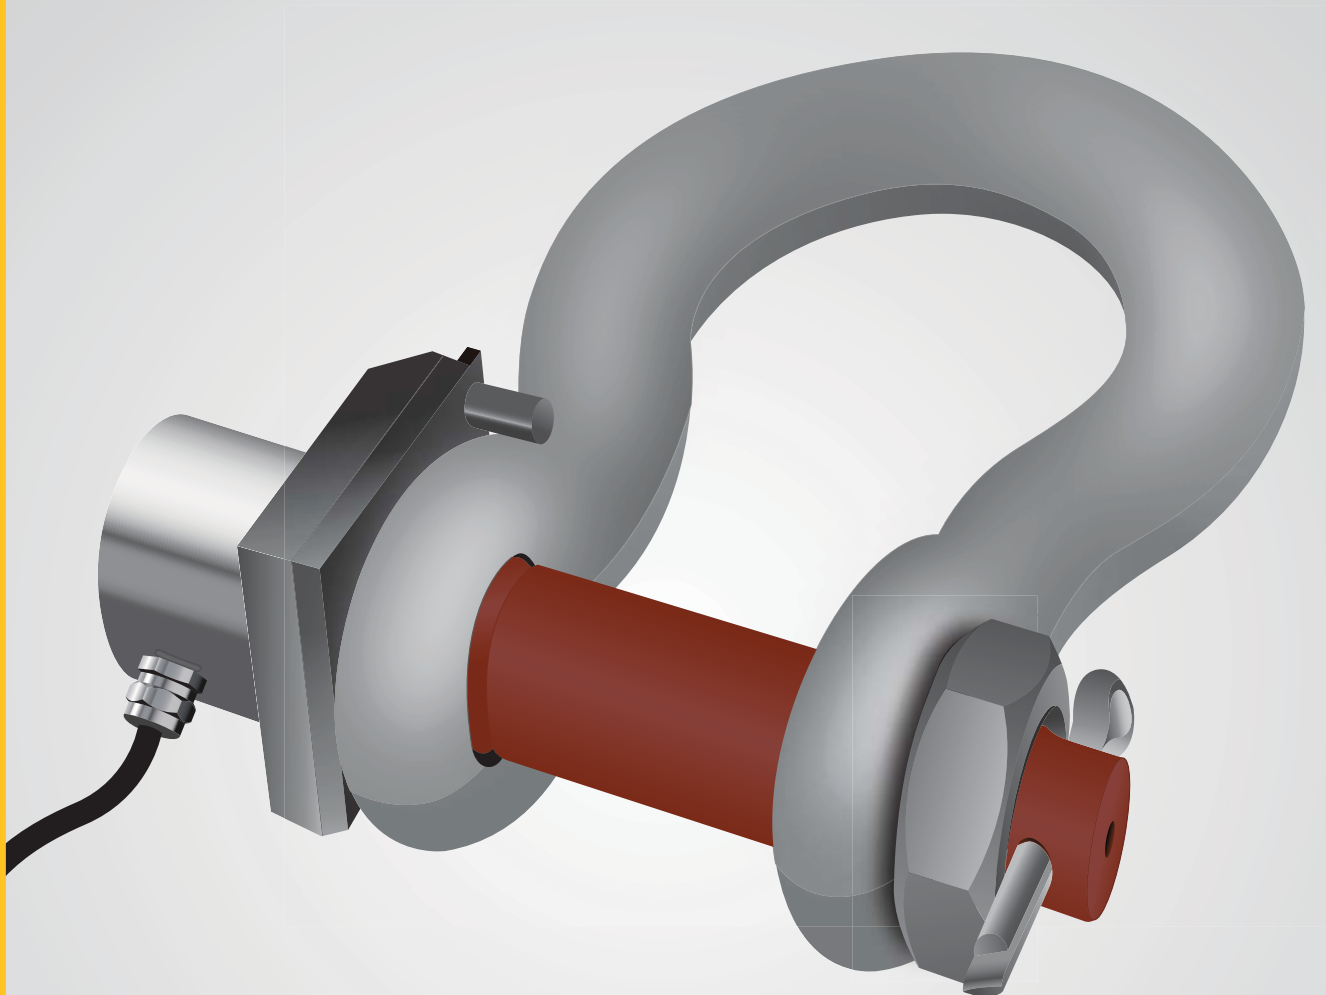

Simple to install bow shackle loadcell range from 2200 to 880000lbs capacity with 33ft cable. Constructed from high tensile carbon steel. Sealed to NEMA 4X standards. Proof tested to 150 % of normal rated load. Requires connection to our loadcell instrumentation.

shackle loadcells

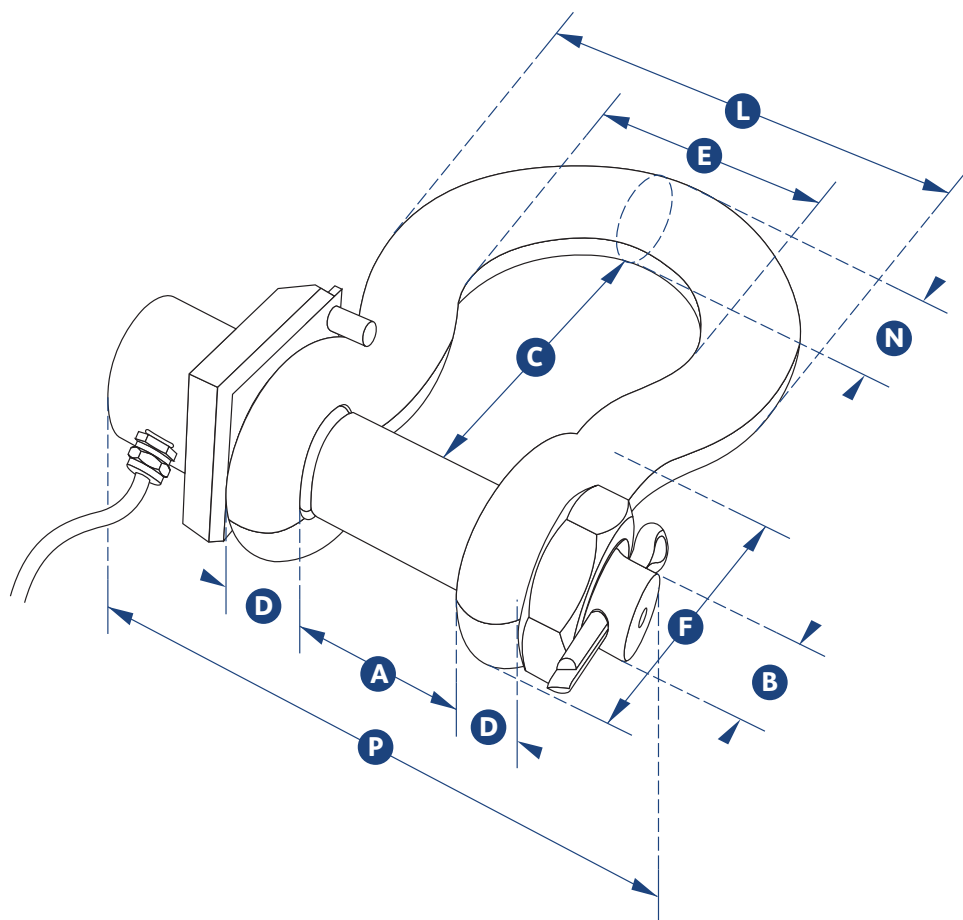

Specifications (inches)

Part Number	SLB1TU	SLB3.25TU	SLB6.5TU	SLB12TU	SLB17TU	SLB25TU	SLB55TU	SLB85TU	SLB120TU	SLB200TU	SLB300TU	SLB400TU
Capacity	2200lb	7150lb	14300lb	26400lb	37400lb	55000lb	120000lb	185000lb	260000lb	440000lb	660000lb	880000lb
Resolution	2lb	10lb	10lb	20lb	50lb	50lb	100lb	100lb	200lb	200lb	1000lb	1000lb
Weight	4.4lb	6.16lb	7lb	17.6lb	26.4lb	40lb	55lb	99lb	187lb	473lb	801lb	1144lb
Protection	NEMA 4X std or submersion to 100ft as an option											
Safety Factor	300 % of rated load											
Op Temp	-4°F - 158°F											
Accuracy	±1 %											
Dimension A	0.66	1.06	1.44	2.03	2.38	2.87	3.25	4.13	5.00	7.24	8.39	8.27
Dimension B	0.44	0.75	1.00	1.38	1.63	2.01	2.24	2.76	3.25	4.76	5.98	7.01
Dimension C	1.44	2.38	3.31	4.69	5.75	7.01	7.76	10.51	12.99	15.63	19.49	22.52
Dimension D	0.38	0.63	0.88	1.25	1.50	1.75	2.01	2.62	2.99	3.76	4.76	6.50
Dimension E	1.03	1.69	2.28	3.25	3.88	5.00	6.46	7.24	7.87	10.98	12.99	12.99
Dimension F	0.91	1.50	2.09	2.99	3.62	4.17	4.80	5.71	6.50	10.51	12.01	14.02
Dimension H	2.48	4.17	5.83	8.27	10.00	12.32	13.70	17.83	21.50	29.25	35.24	40.24
Dimension L	1.78	2.93	4.02	5.75	6.89	8.86	9.96	12.87	14.37	20.98	25.00	25.98
Dimension N	0.38	0.69	0.97	1.38	1.62	2.24	2.40	3.11	3.62	5.98	6.77	7.24
Dimension P	2.17	3.52	4.72	6.50	7.72	9.06	10.39	13.54	16.50	20.51	24.33	27.95

(Larger capacities than those listed, price on application)

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800

Panama City, FL
(850) 769-1120

july2012

15




miniweigher plus



Our most popular product, manufactured since 1987. This crane scale will suit most lifting applications. Available in capacities from 220 to 11,000lbs. All MWP's have push button control for: tare, units (lbs, kg, kN & t), peak hold, pre-set tare, audible setpoint alarm and overload counter. Supplied with high quality Crosby hook and lifting eye. Other fittings such as Gunnebo or rod ends are available on request. Supplied with aluminium flight case.

miniweigher plus

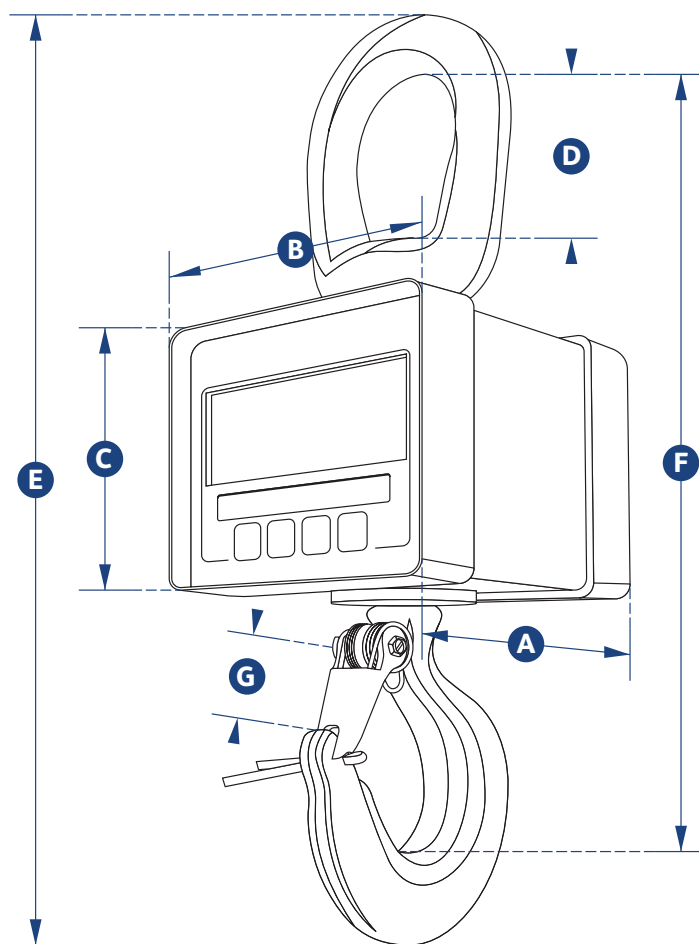

Specifications (inches)

Part Number	MWP250KGU	MWP500KGU	MWP1TU	MWP2TU	MWP5TU
Capacity	550lb	1100lb	2200lb	4400lb	11000lb
Resolution	0.2lb	0.5lb	1lb	2lb	2lb
Units	lbs, t, kg, and kN				
Weight	3.3lb	3.3lb	3.3lb	6.8lb	19.2lb
Safety Factor	5:1	5:1	5:1	5:1	5:1
Battery Type	9v PP3				
Battery Life	80 hours continuous				
Display Type	6 digit 1" LCD				
Op Temp	14°F - 122°F				
Accuracy	± 0.3 % of applied load				
Protection	NEMA 4X				
Dimension A	3.23	3.23	3.23	4.61	5.35
Dimension B	4.45	4.45	4.45	4.41	4.41
Dimension C	3.19	3.19	3.19	3.62	3.62
Dimension D	1.97	1.97	1.97	2.52	3.86
Dimension E	9.45	9.45	9.45	12.60	17.48
Dimension F	8.19	8.19	8.19	10.67	14.37
Dimension G	0.87	0.87	0.87	1.10	1.65

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800

Panama City, FL
(850) 769-1120

july2012

17



jumboweigher



44000lb
version



**11000lb and
22000lb**
version



Heavy duty crane scale designed to be used in the harshest industrial environments.
Available in 11000 and 22000 and 44000 lb capacities.
Bright LED display makes it easy to read in the lowest light applications.
Large keys make operation simple even if wearing gloves.
Supplied with remote control with tare and hold facility.

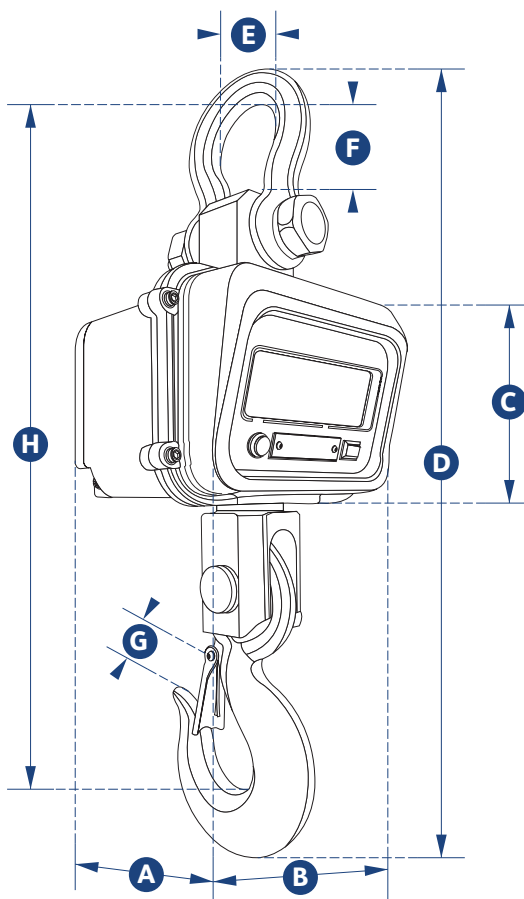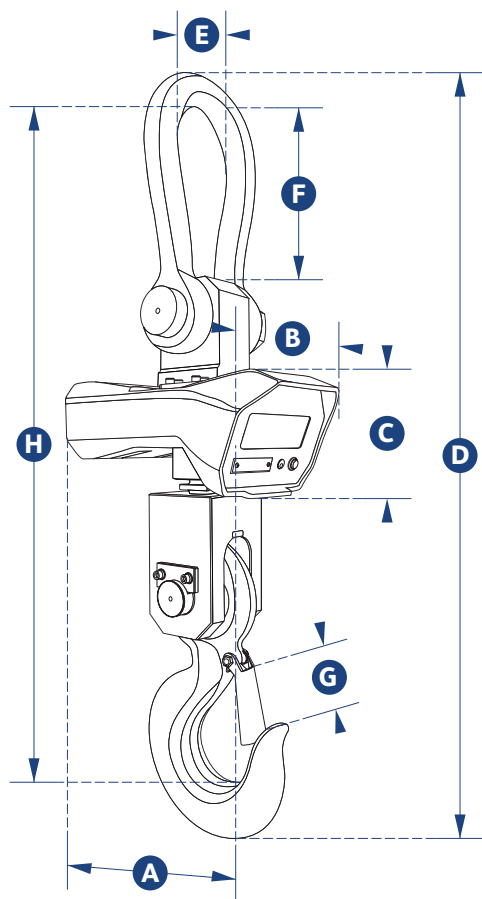

jumboweigher

Part Number	JW5TU	JW10TU	JW20TU
Capacity	11000lb	22000lb	44000lb
Resolution	5lb	10lb	20lb
Units	lb	lb	lb
Weight	40lb	64lb	165lb
Safety Factor	5:1		
Battery Type	Internal rechargeable		
Battery Life	20 hours		
Display Type	1.18"mm LED		
Op Temp	14°F - 104°F		
Accuracy	± 0.3 % of applied load		
Dimension A	7.68	7.68	13.98
Dimension B	10.04	10.04	9.06
Dimension C	7.09	7.09	6.50
Dimension D	28.15	30.71	43.90
Dimension E	2.83	3.54	5.51
Dimension F	3.54	4.33	9.06
Dimension G	1.42	1.97	2.76
Dimension H	23.43	25.98	38.58

Specifications (inches)

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800


Panama City, FL
(850) 769-1120

july2012

19




loadblock plus

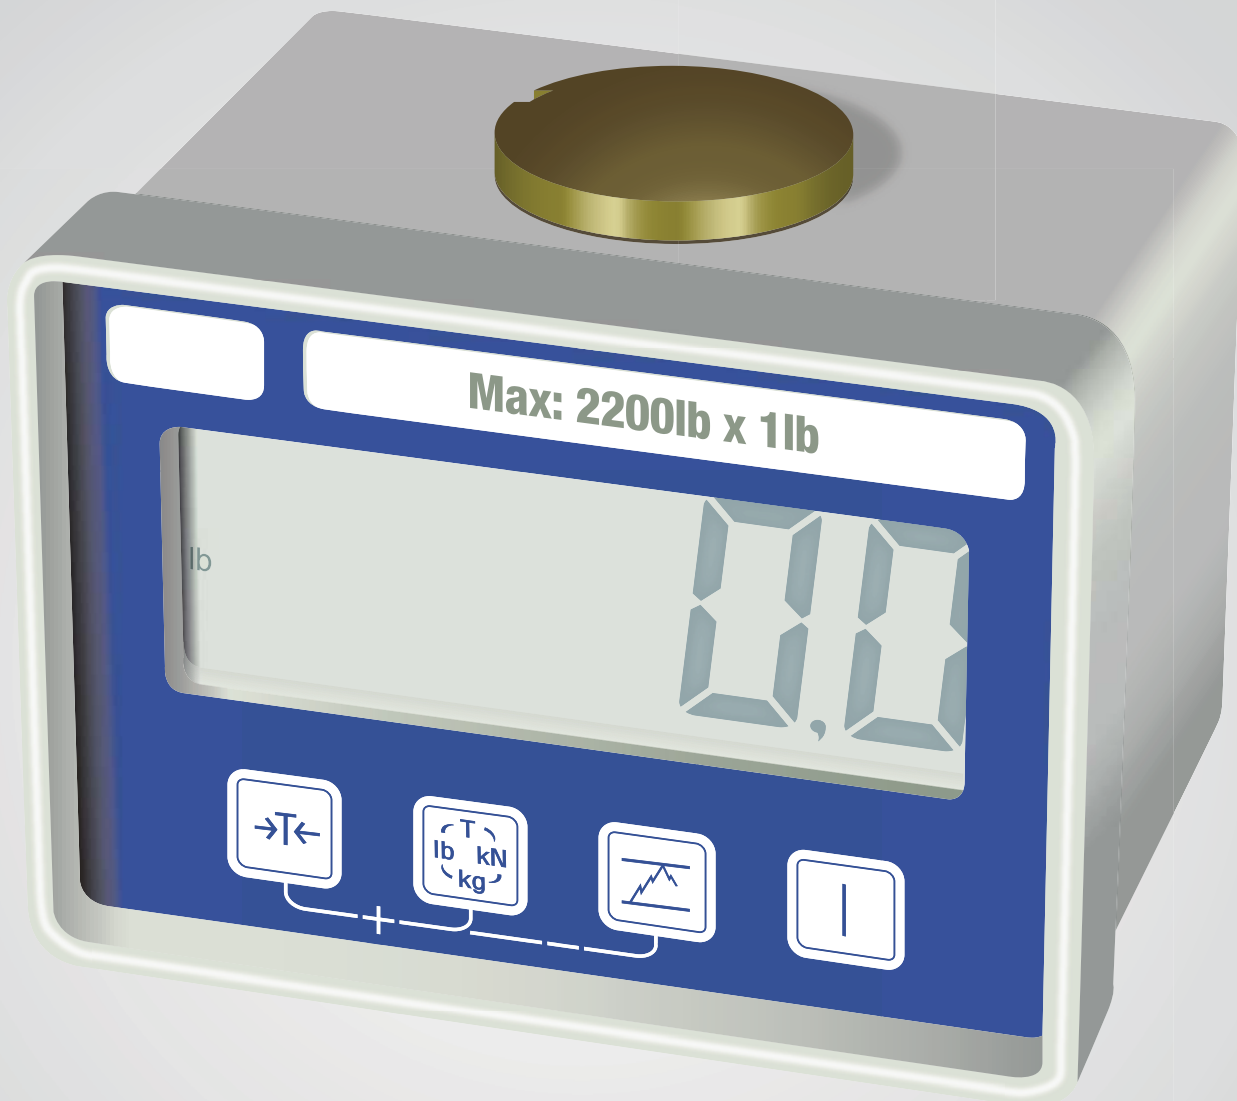

Compression loadcell with integral display, used in many testing and load monitoring applications worldwide.

All LBP's have push button control for: tare, units (lbs, kg, kN & tonnes), peak hold, pre set tare, audible setpoint alarm and overload counter.

Remote output for connection to our range of accessories.

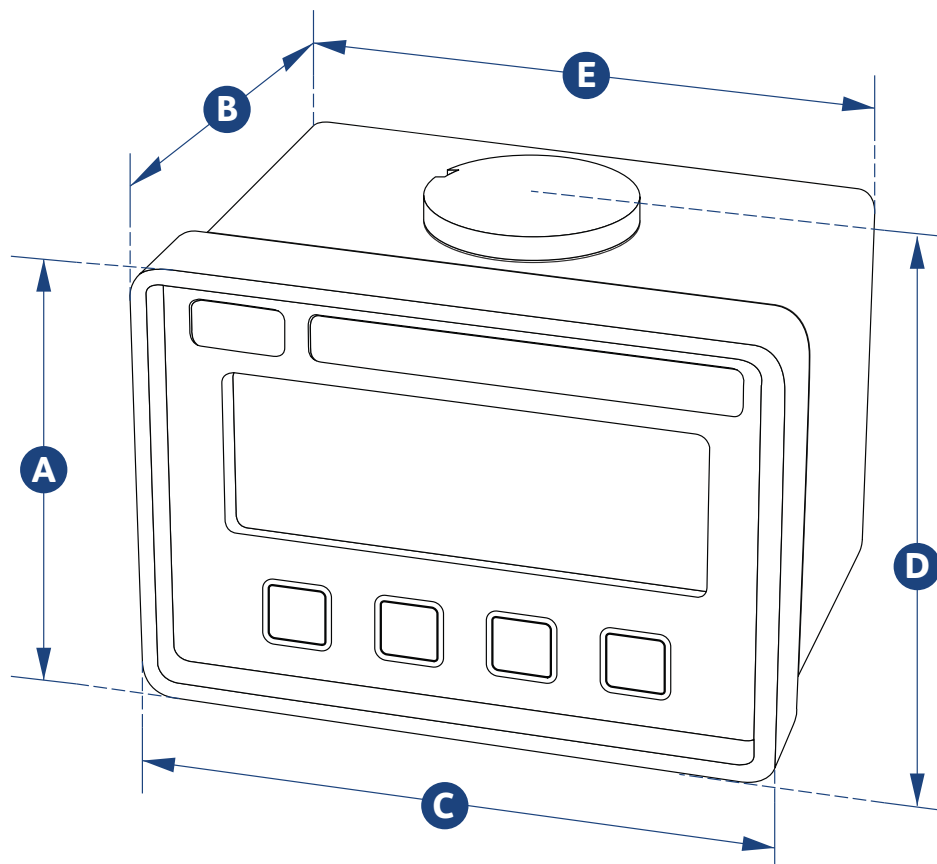

loadblock plus

Part Number	LBP250KGU	LBP500KGU	LBP1TU	LBP2TU	LBP5TU
Capacity	550lb	1100lb	2200lb	4400lb	11000lb
Resolution	0.2lb	0.5lb	1lb	2lb	2lb
Units	lbs, t, kg, and kN				
Weight	2lb	2lb	2lb	3.3lb	6.8lb
Safety Factor	4:1	5:1	5:1	5:1	5:1
Protection	NEMA 4				
Battery Type	9v PP3				
Battery Life	80hrs continuous				
Display Type	6 digit 1" LCD				
Operating Temp	14°F - 122°F				
Accuracy	± 0.3 %				
Dimension A	3.19	3.19	3.19	3.62	3.62
Dimension B	3.19	3.19	3.19	4.61	136
Dimension C	4.45	4.45	4.45	4.61	4.41
Dimension D	3.54	3.54	3.54	4.09	4.53
Dimension E	4.09	4.09	4.09		

Houston, TX
(713) 674-2266

Beaumont, TX
(409) 729-9187

New Iberia, LA
(337) 369-3903

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800


Panama City, FL
(850) 769-1120

july2012

21




compression loadcells

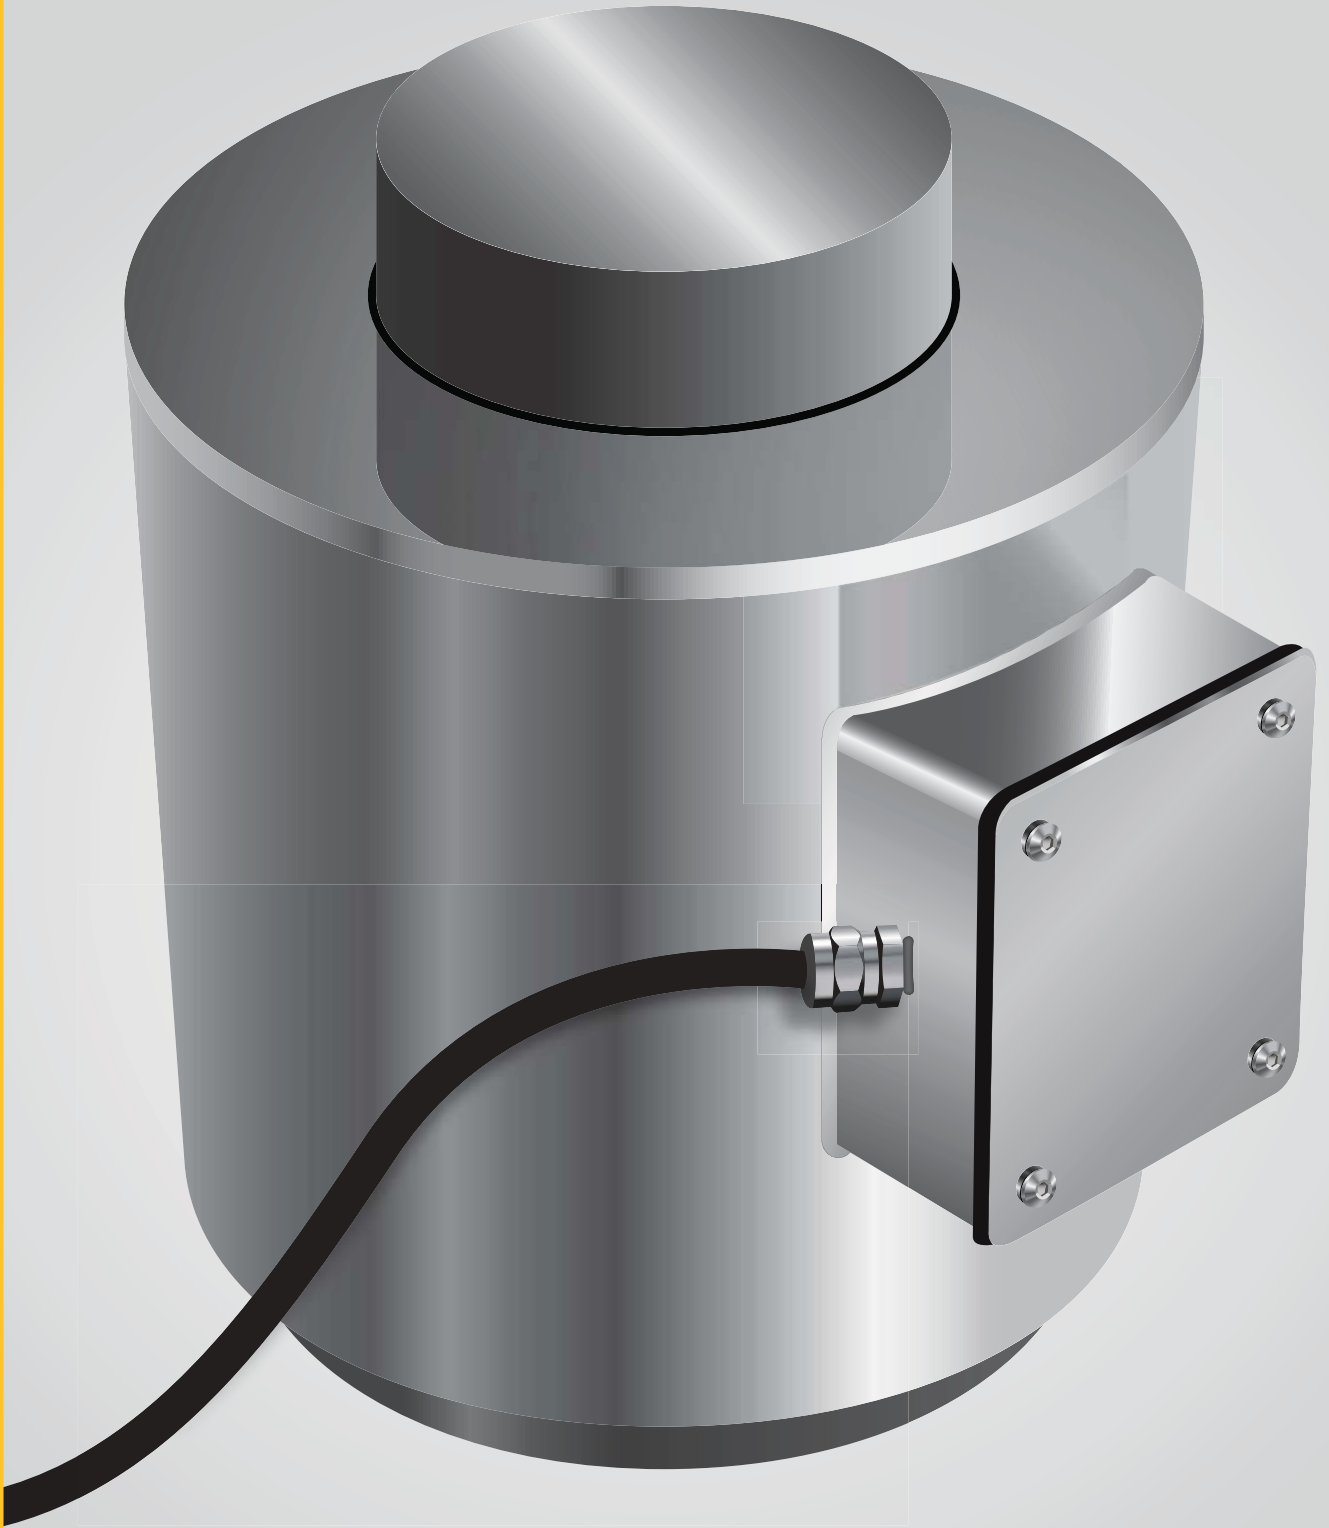

Our range of compression loadcells are available from 11,000 to 11,00000lbs. Supplied with 33 feet of cable as standard, other lengths are available on request.

Requires connection to our Handheld plus.

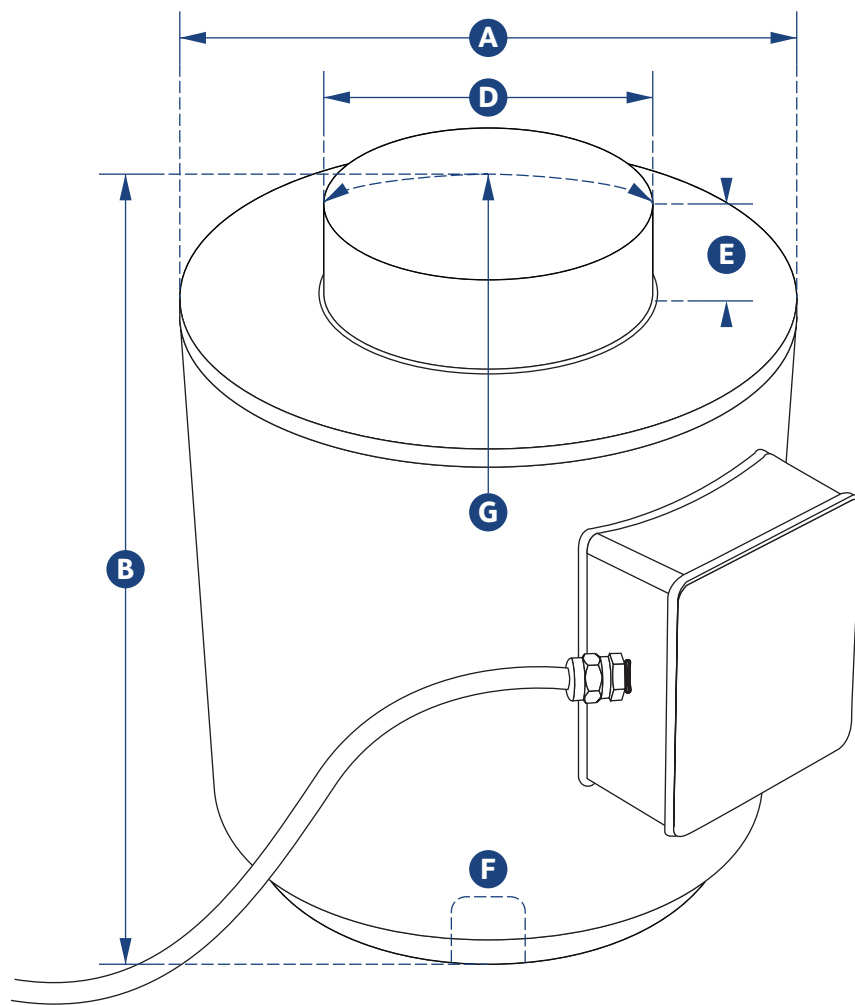

compression loadcells

Specifications (inches)	Part Number	NI5TCU	NI10TCU	NI25TCU	NI50TCU	NI100TCU	NI150TCU	NI300TCU	NI500TCU
	Capacity	11000lb	22000lb	55000lb	110000lb	220000lb	330000lb	660000lb	1100000lb
	Resolution	2lb	10lb	20lb	50lb	200lb	200lb	500lb	1000lb
	Weight	7lb	7lb	7lb	13.64lb	34lb	34lb	143lb	143lb
	Safety Factor	3:1							
	Protection	NEMA 4							
	Operating Temp	-40°F - 149°F							
	Accuracy	± 0.3 %							
	Dimension A	2.99	2.99	2.99	4.02	5.98	5.98	7.28	7.28
	Dimension B	3.27	3.27	3.27	5.00	7.24	7.24	11.81	11.81
	Dimension D	1.26	1.26	1.26	2.32	3.15	3.15	6.10	6.10
	Dimension E	0.39	0.39	0.39	0.51	1.02	1.02	1.08	1.08
	Dimension F	M12 x 1.75	M12 x 1.75	M12 x 1.75	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5	M20 x 2.5
	Dimension G	5.98	5.98	5.98	5.98	17.01	17.01	17.01	17.01

(Larger capacities than those listed, price on application)

Houston, TX
(713) 674-2266
Beaumont, TX
(409) 729-9187
New Iberia, LA
(337) 369-3903
New Orleans, LA
(504) 496-0196

B Bishop Lifting
Products, Inc.
www.Lifting.com

Odessa, TX
(432) 332-5922
Oklahoma City, OK
(405) 789-2800
Rock Springs, WY
(307) 382-6622
Panama City, FL
(850) 769-1120

july2012
23



Handheld Plus

Fully featured handheld display for all non-radio Straightpoint products or other manufacturers' loadcells. All HHP's have push button control for: tare, units (kg, lbs, kN and tonnes), peak hold, preset tare and audible setpoint alarm and overload counter.



Wall or Cab Mount Bracket

available for handheld

Part No.
SU3282

Part Number	HHP
Battery Type	1 x PP3 Alkaline
Battery Life	80hrs continuous
Display Type	6 digit 1" LCD
Operating Temp	14°F - 122°F
Display Rate	3Hz
Sample Rate (Normal)	10Hz
Sample Rate (Peak Hold)	100Hz
Excitation	5v
Maximum Sensitivity	3mv/v
Non-linearity	0.001 % FR
Max resolution	1:999999 (normal mode)

Wall or Cab Mount Bracket

Wall or cab mount bracket for all Straightpoint handheld displays.

Part Number	SU3282
-------------	--------

Desktop Controller Datalogging Software

Simple, self-installing Windows-based PC package that allows the operator full control via the screen and mouse.

Can be set to log data (time/date and load) into a spreadsheet by user input time interval.

Wire version is supplied with 33 feet of cable.

A spare USB port is required.

Part Number	DCP10M	RDCP
For use with	LLP, MWP, LBP	Wireless loadcells

Cables

Custom made extensions in length to our standard cables - priced per foot.

Part Number	EXT/#
-------------	-------

Shackles

We can now offer a full range of bow shackles from Crosby.

Wireless Loadcell Module

Connect to any loadcell to convert it into a wireless system.

Part Number	T24-ACM
-------------	---------

Houston, TX
(713) 674-2266
New Iberia, LA
(337) 369-3903

Beaumont, TX
(409) 729-9187
New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**
www.Lifting.com

Odessa, TX
(432) 332-5922
Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800
Panama City, FL
(850) 769-1120

Houston, TX
(713) 674-2266

New Iberia, LA
(337) 369-3903

Beaumont, TX
(409) 729-9187

New Orleans, LA
(504) 496-0196



**Bishop Lifting
Products, Inc.**

www.Lifting.com

Odessa, TX
(432) 332-5922

Rock Springs, WY
(307) 382-6622

Oklahoma City, OK
(405) 789-2800

Panama City, FL
(850) 769-1120