

AV Mounting Systems

Q2-2010





Smart
metals

<i>SmartMetals® projector mounts</i>	<i>2</i>
<i>Projector – Ceiling mounts</i>	<i>3–5</i>
<i>Projector – Wall mounts</i>	<i>6–9</i>
<i>Projector – Rental mounts</i>	<i>10</i>
<i>Projector – Mirror set</i>	<i>11</i>
<i>Projector – Anti theft</i>	<i>12–13</i>
<i>Projector – Explanation series 1 & series 2</i>	<i>14</i>
<i>Projector – Accessories</i>	<i>15–17</i>
<i>SmartMetals® flat screen mounts</i>	<i>18</i>
<i>Flat screen – Wall mounts</i>	<i>19–22</i>
<i>Flat screen – Ceiling mounts</i>	<i>23</i>
<i>Flat screen – Stands</i>	<i>24</i>
<i>Flat screen – Stand configurations</i>	<i>25–26</i>
<i>Flat screen – Lift systems</i>	<i>27</i>
<i>Flat screen – Stand parts</i>	<i>28–30</i>
<i>Flat screen – Stand rental accessories</i>	<i>31–32</i>

Our general terms and conditions will apply to all transactions; of which an example will be sent on the first request. By acceptance of any transaction, we wish to receive a signed copy of these general terms and conditions via fax nr.: +31(0)183-352909.

Sky-Lite offers a comprehensive range of **projector mounts** for securing projectors to a ceiling, wall, or truss. Our mounts come in all standard lengths and usually have a ball joint, which attaches simply to your bracket and projector and can be adjusted by hand.

Sky-Lite also produces bespoke mounts for special projects. We work closely with our customers to meet their requirements for dimension and colour. Please contact us for further information.

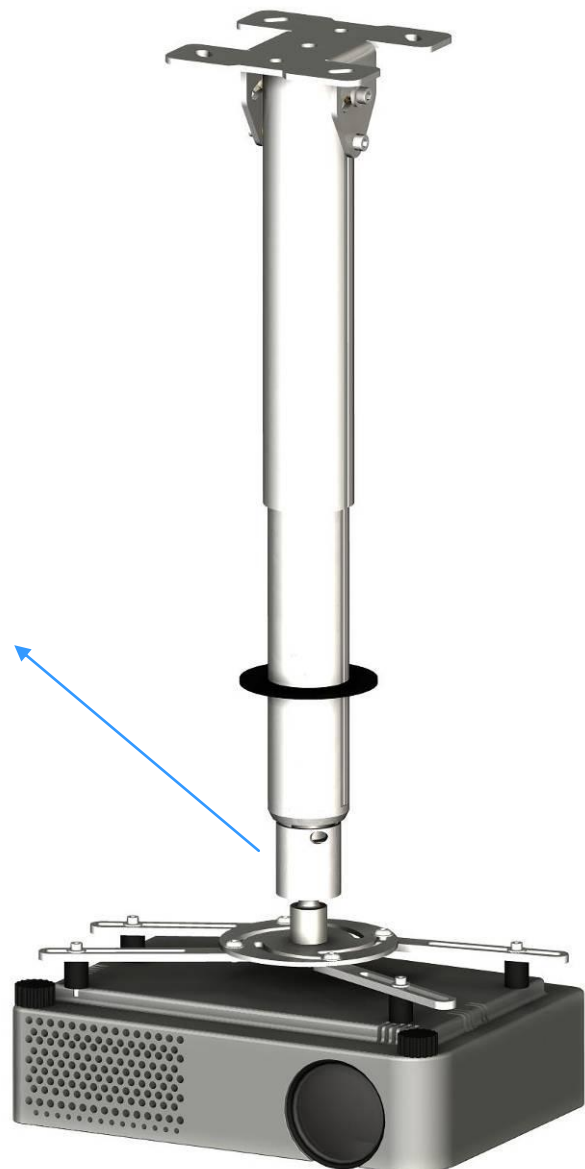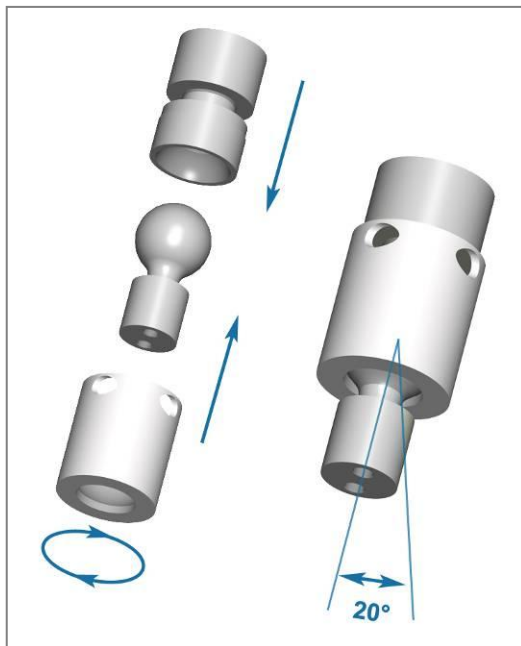

Our universal tube mounts fit virtually any projector and are available in a range of standard lengths. All models except for the shortest can be continuously adjusted in length and include drop-down protection, ensuring that the inner and outer tube will not part.

All universal tube sets come with a ball joint that can be adjusted without tools. The bracket and your projector attach to the ball joint and can be oriented in any direction. The cable duct is easily accessible from the outside and the slotted holes in the ceiling plate make ceiling mounting straightforward.

Contents of a complete set:

- Tube set
- Universal bracket with 4 small arms
- Extensive set of bolts and spacers:
M3, M4, M5, and M6 in various lengths
- User manual



Tube sets with a universal bracket: fixed lengths



002.2440 L1: 13 cm

- Fixed length
- Max. strain: 25 kg
- Universal bracket

002.2441 L1T: 13 cm

- o.b.o. Doughty Trigger Clamp
- Fixed length
- Max. strain: 25 kg
- Universal bracket
- Electrical insulation
- Excl. Doughty Trigger Clamp
(003.1128)

002.2445 L2: 28 cm

- Fixed length
- Max. strain: 25 kg
- Universal bracket

Tube sets with a universal bracket: adjustable in length



002.2450 L3: 42-59 cm

- Continuously adjustable
- Max. strain: 25 kg
- Angular adjustment:
+30° till -30°
- Universal bracket

002.2460 L4: 59-93 cm

- Continuously adjustable
- Max. strain: 25 kg
- Angular adjustment:
+30° till -30°
- Universal bracket

002.2470 L5: 93-158 cm

- Continuously adjustable
- Max. strain: 25 kg
- Angular adjustment:
+30° till -30°
- Universal bracket

Tube sets without a universal bracket

SmartMetals® tube sets are also available separately without a universal bracket so that you can add a projector-specific bracket or housing to them. The options are outlined on the next page.

Tube sets without a universal bracket: fixed lengths



002.2040 L1: 10 cm

- Fixed length
- Max. strain: 25 kg



002.2041 L1T: 10 cm

- o.b.o. Doughty Trigger Clamp
- Fixed length
- Max. strain: 25 kg
- Electrical insulation
- Excl. Doughty Trigger Clamp (003.1128)



002.2045 L2: 25 cm

- Fixed length
- Max. strain: 25 kg

Tube sets without a universal bracket: adjustable in length

002.2050 L3: 40-57 cm

- Continuously adjustable
- Max. strain: 25KG
- Angular adjustment: +30° till -30°

002.2060 L4: 57-91 cm

- Continuously adjustable
- Max. strain: 25KG
- Angular adjustment: +30° till -30°

002.2070 L5: 91-156 cm

- Continuously adjustable
- Max. strain: 25KG
- Angular adjustment: +30° till -30°

Brackets



002.1000

Universal bracket

Standard colour: silver-grey



002.1001

Projector specific bracket

Standard colour: silver-grey



L3

L4

L5

Now that new technology has made it possible to project images effectively over a short distance, our customers need highly adjustable projector mounts. **SmartMetals®** projector-specific wall mounts are designed to make adjustments faster and more precise.



For ultra-short-throw projectors, such as the Hitachi A100 series and the Sanyo PLC-XL50, we have integrated into our mounts a unique precision adjustment that inclines and tilts from the heart of the lens. This system derives from the *projector fine adjustment* (002.1600) in our rental range, which has proven in rental situations to be fast and simple to use.

For other projectors, wall mounts can be installed with a universal or projector-specific bracket. The separate wall mounts (without a universal bracket) can be used in combination with the **SmartMetals®** mirror kit and a projector-specific bracket. The mount will be mounted to the ceiling in this configuration.

Wall mounts with fine adjustment, projector specific

002.1800

Ultra short throw wall mount with fine adjustment o.b.o.:

Hitachi A100 series

- 5° pan-, and tiltable
- Adjustable horizontally and vertically
- Includes mounting material
- Extendable with *Projector Housing* (002.1820)




002.1810

Ultra short throw wall mount with fine adjustment o.b.o.:

Sanyo PLC-XL50/51

- 5° pan-, and tiltable
- Adjustable horizontally and vertically
- Includes mounting material

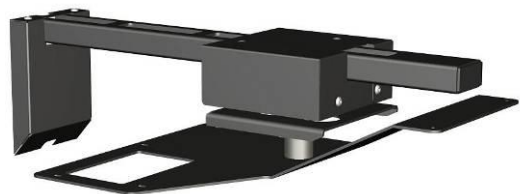

002.1820

Projector housing o.b.o.:
Hitachi A100 series

- Only usable i.c.w. short throw wall mount (002.1800)
- Includes mounting material
- Includes mirror protection (removable)
- Does not include lock set (000.1800)



000.1820

Lock set for projector housing (002.1820) o.b.o.:
Hitachi A100 series

- 4 padlocks for wall mount
- 1 lock for housing



Wall mounts with continuous length adjustment: with universal bracket

002.1565

Wall mount with continuous length adjustment, 60-90cm, with univ.bracket

- Continuous length adjustment from 60-90cm
- Includes universal projector bracket
- Includes mounting material
- Colour: silver-grey (optional: white)



002.1570

Wall mount with continuous length adjustment, 85-135cm, with univ.bracket

- Continuous length adjustment from 85-135cm
- Includes universal projector bracket
- Includes mounting material
- Colour: silver-grey (optional: white)



002.1575

Wall mount with continuous length adjustment, 110-175cm, with univ.bracket

- Continuous length adjustment from 110-175cm
- Includes universal projector bracket
- Includes mounting material
- Colour: silver-grey (optional: white)




Wall mounts with continuous length adjustment: without universal bracket

002.1065

Separate wall mount with continuous length adjustment, 60-90cm


- Continuous length adjustment from 60-90cm
- Don't use this model for the *Mirror set*
- Colour: silver-grey (optional: white)

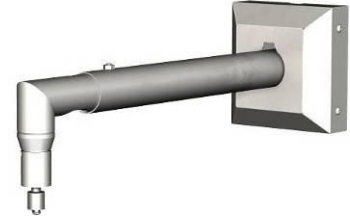

002.1070

Separate wall mount with continuous length adjustment, 85-135cm

- Continuous length adjustment from 85-135cm
- Don't use this model for the *Mirror set*
- Colour: silver-grey (optional: white)

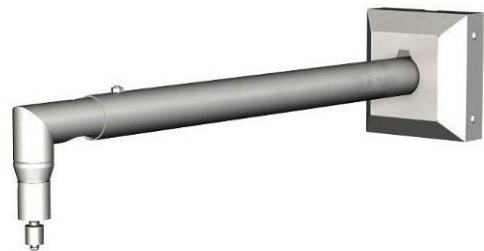

002.1075

Separate wall mount with continuous length adjustment, 110-175cm

- Continuous length adjustment from 110-175cm
- Don't use this model for the *Mirror set*
- Colour: silver-grey (optional: white)



Separate brackets



002.1001

Projector specific bracket
Standard colour: silver-grey

Please specify brand and model when ordering, for example:

006.1008 Hitachi CP-D10/CP-DW10N

006.1009 Hitachi CP-AW100N
With integrated 10° angle

!PLEASE NOTE! For the combination 002.1065/1070/1075 with 002.1001, we offer a special price for a minimum purchase amount of 50 pieces. Please check our price list for more information.

Wall mounts without universal bracket

This series can be used in combination with the *Mirror Set (002.2000)* and *Projector specific bracket (002.1001)* for ceiling configuration.

002.1560 Wall mount, length 2: 35-63 cm*
* Shortening up to 24 cm possible

002.1561 Wall mount, length 3: 63-100 cm

002.1562 Wall mount, length 4: 87-135 cm

002.1563 Wall mount, length 5: 115-160 cm



Separate brackets



002.1000 Universal bracket
Standard colour: silver-grey



002.1001 Projector specific bracket
Standard colour: silver-grey

Please specify brand and model when ordering.

Our rental mounts make it quick and easy to hang projectors in rental situations. With quarter-turn latches the projector is mounted onto the bracket in no time. However, the projector should be fitted with a universal rental bracket or projector-specific bracket.

Electrical insulation

Our tube sets are electrically insulated so the truss does not need to be taped to prevent screen problems. The ball joint can easily be adjusted using the special rental ring. The tube set is fitted with lifting eyes for safety attachments.

002.1641 [Rental set 1](#), fixed length 11 cm o.b.o. trigger clamp

002.1660 [Rental set 2](#), 45–70 cm

002.1661 [Rental set 3](#), 70–115 cm


002.1662 [Rental set 4](#), 100–145 cm

002.1663 [Rental set 5](#), 125–170 cm



002.1001

[Projector specific bracket](#)



002.1003

[Universal rental bracket](#)



003.1128

[Doughty trigger clamp](#)

Projector fine adjustment

We also offer a suspension device for fine adjustment of larger projectors. With our fine adjustment screw thread mechanism it is possible to continuously pan and tilt a projector through 20 degrees. Adjustments are instant and multiple projection easily attained, saving the valuable time of technicians on location. The bracket — known as a *trigger clamp* — is electrically insulated and can also be ordered separately.



002.1600

[Projector fine adjustment](#)

Stainless steel mirror set

Our mirror set allows you to position a projector above a suspended ceiling, with a mirror mounted directly below the ceiling. A ball joint ensures projection at the proper angle. All visible parts below the ceiling are made of stainless steel.

The mirror set is to be combined with a wall mount 002.1560-63, and a projector-specific bracket.

The advantages:


- Anti-theft mechanism
- No visible projector and cables
- Noise reduction

002.2000 Stainless steel mirror set

Separate brackets



002.1001 Projector specific bracket
Standard colour: silver-grey

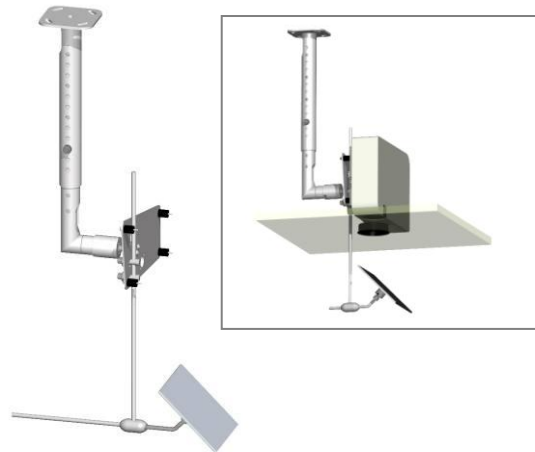

Our housings can accommodate almost any projector, offering you protection from theft and damage. Our special design is compatible with projectors with a left-hand, central or right-hand lens, and comes in three different sizes.

Our housings are fitted with a universal bracket and ball joint to be used with our separate tube sets, offering you the usual flexibility in orientation.

Our housings can be installed easily, and allow quick access to the projector for maintenance.

For special projects we make bespoke housings. Please contact us for further information.



002.3010

Universal projector housing, small:

- Max. dimension of the projector (W x D x H)
350 x 330 x 110 mm
- To be combined with a separate tube set without universal bracket



002.3030

Universal projector housing, medium:

- Max. dimension of the projector (W x D x H)
400 x 330 x 150 mm
- To be combined with a separate tube set without universal bracket



002.3020

Universal projector housing, large:

- Max. dimension of the projector (W x D x H)
490 x 430 x 180 mm
- To be combined with a separate tube set without universal bracket



000.3000 (o.b.o. series 1) **003.3100** (o.b.o. series 2)

Lock set for the projector housing and tube set



Anti-theft set

Our anti-theft set offers excellent protection for your projector. The suspension points of your projector are covered by a heavy steel cable, which runs via the cable duct of the tube set to the ceiling. The cable is then secured to a special module, which is itself locked into a disc lock. This set can be used with universal and projector-specific brackets.


The advantages:

- Anti-theft mechanism
- Barely visible when compared to a housing



003.2020 Anti-theft set (series 1)

003.2220 Anti-theft set (series 2)

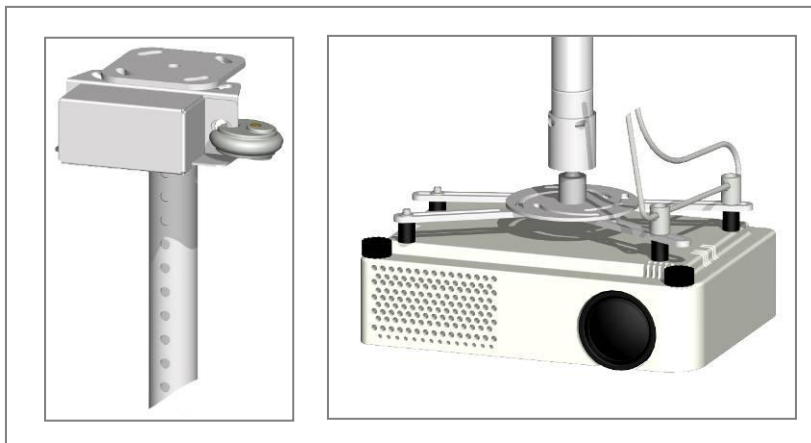

The following three pages list various accessories that can be added to a **SmartMetals®** projector mount. Please note that some of our existing accessories (series 1) have been modified to be compatible with our new series projector mounts (series 2), and the list is not exhaustive.

Example

003.1050 (o.b.o. series 1)

003.1250 (o.b.o. series 2)

Stretching set. Complete set with 4 x 3 metre steel wire, stretchers and wedge bolts

Please find below which product numbers belong to series 1 and series 2.

Series/Serie: 1

002.1040	002.1440	002.1641
002.1041	002.1441	002.1660
002.1060	002.1460	002.1661
002.1061	002.1461	002.1662
002.1062	002.1462	002.1663
002.1063	002.1463	

Series/Serie: 2


002.2040	002.2440
002.2041	002.2441
002.2045	002.2445
002.2050	002.2450
002.2060	002.2460
002.2070	002.2470



002.1000

Universal bracket. This bracket comes with 4 small arms, spacers and bolts from M3 up to M6.


Colour: silver-grey or black

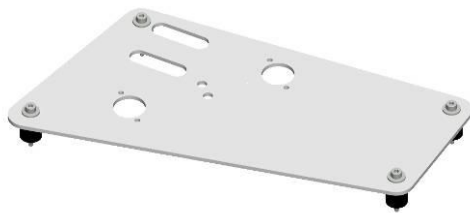

002.1001

Projector-specific bracket

Colour: silver-grey or black

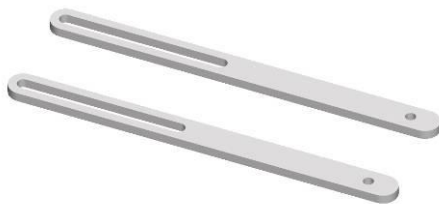

003.1002

Set of 2 long arms. These can be used if the standard arms are not long enough.

Colour: silver-grey or black



003.1050 (o.b.o. series 1)

003.1250 (o.b.o. series 2)

Stretching set. Complete set with 4 x 3 metre steel wire, stretchers and wedge bolts.



003.1079 (o.b.o. series 1)

Extension tube 1 metre. 0.9 metres effectively.

003.1078 (o.b.o. series 1)

Extension tube 2 metres. 1.9 metres effectively.

Colour: silver-grey or black



003.1125

Fixed mounted spacers. The perfect solution for keeping all material together in situations where you have to regularly detach the projector from the mount.



003.1120


Adapter plate.



003.1121


Rental plate. Quarter-turn latches make attaching/detaching a projector easy. For use with a projector-specific bracket.

Colour: black or silver-grey

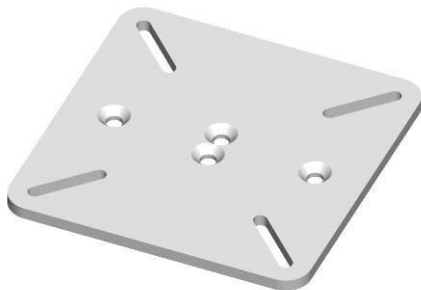


003.1122

Flat screen conversion plate. For attaching a small flat screen to an angled tube set. For screens with VESA 75 or 100.

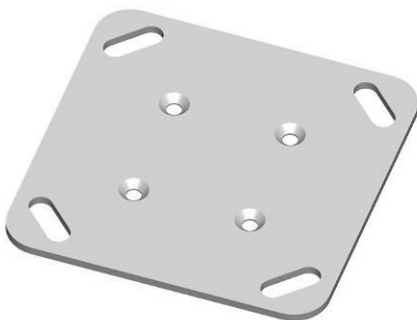

003.1123 (o.b.o. series 1)

Large ceiling plate. This plate can be used if the plate included in the standard tube set is too small.

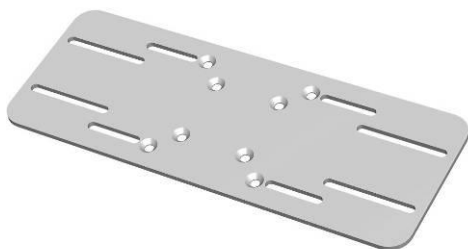

003.1124 (o.b.o. series 1)

003.2124 (o.b.o. series 2)

Ceiling plate for sheet-pile profile. This plate can be fixed to the sheet-pile profile at the top floors of buildings, and attaches to a standard tube set.



003.1126 (o.b.o. series 1)

003.2126 (o.b.o. series 2)


Wooden beam conversion plate. For mounting a standard tube set to a wooden beam, which is too small for a standard tube set.



003.1151

Ball locking ring in rental construction. For easy fixation of the ball joint. The listed price is an additional price, when compared to a standard.

Colour: black or silver-grey



003.1152

Separate ball, small.

003.1153

Separate ball, large.



003.1180 (o.b.o. series 1)

Continuous angular adjustment. For mounting a tube set (for projectors or flat screens) to a sloped ceiling.



072.2010

H-bar mount small. For mounting **SmartMetals®** tube sets (for projectors or flat screens) to H-bars.

Width H-bar: 80–180mm






072.2020

H-bar mount large. For mounting **SmartMetals®** tube sets (for projectors or flat screens) to H-bars.

Width H-bar: 160–310mm

Sky-Lite offers a comprehensive range of **flat screen mounts** for mounting flat screens to the wall, floor or ceiling. Because of its modular structure, any screen mount can be connected to a tube set for ceiling mounting or to a stand. The mounts are available in fixed and tiltable models. The tiltable model allows a bracket to be tilted and locked in the required position. All screen mounts can be fitted with an anti-theft padlock.

Sky-Lite also produces bespoke mounts for special projects. We work closely with our customers to meet their requirements for dimension and colour. Please contact us for further information.

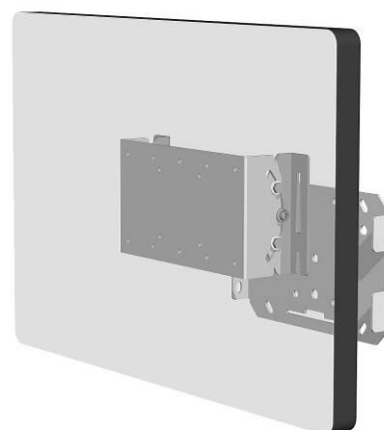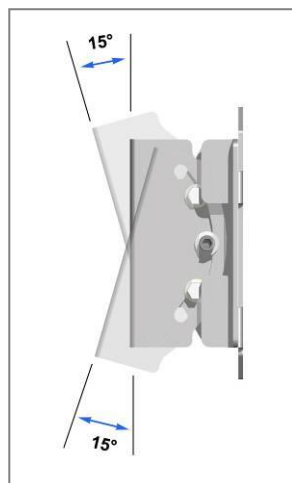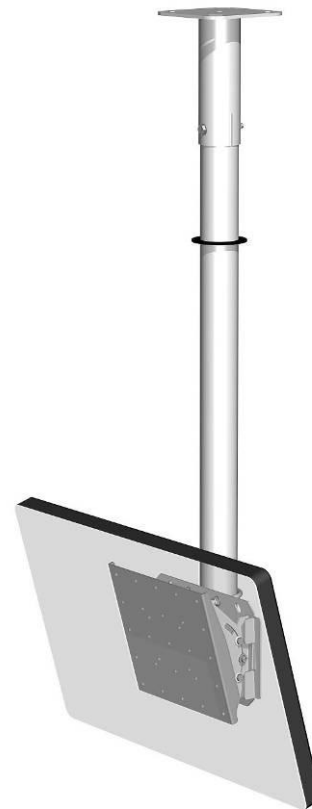


All our VESA flat screen wall mounts can also be used for ceiling mounting in conjunction with a tube set, and for stand mounting using coupling bolts. The mounts are fitted with the fastening material, to secure the screen to the bracket. An anti-theft padlock is available separately.

Fixed VESA wall mounts

052.3000

Fixed VESA wall mount:


- VESA 75, 100, 200-100
- Dimension from the wall: 30mm

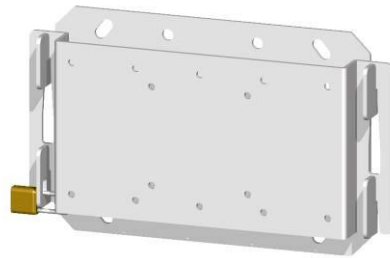

052.4000

Fixed VESA wall mount:

- VESA 75, 100, 200-100, 200-200
- Dimension from the wall: 30mm

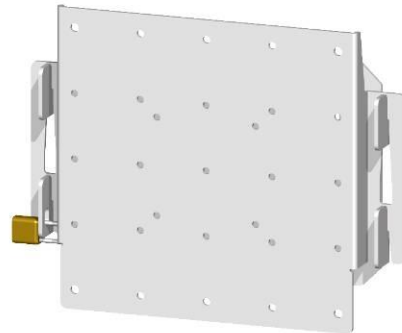


Tiltable VESA wall mounts

052.3050

Tiltable VESA wall mount:


- VESA 75, 100, 200-100
- Dimension from the wall: 70mm
- 15° tilting angle

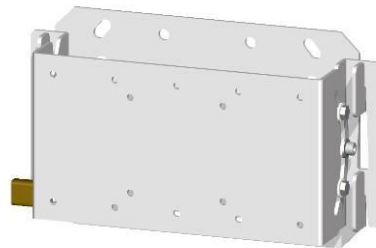

052.4050

Tiltable VESA wall mount:


- VESA 75, 100, 200-100, 200-200
- Dimension from the wall: 70mm
- 15° tilting angle

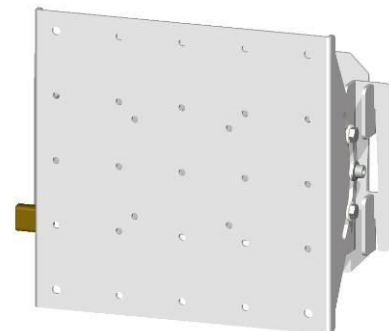

052.8050

Tiltable VESA wall mount:

- VESA 600-400
- Dimension from the wall: 70mm
- 15° tilting angle

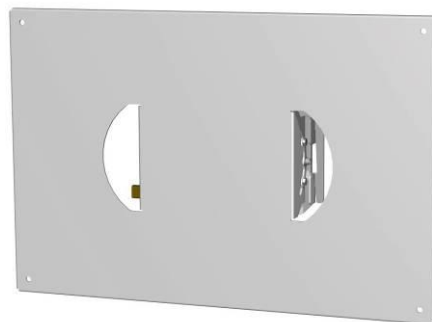


052.8060 (landscape version)

052.8065 (portrait version)

Tiltable VESA wall mount:

- Screen bracket specific for
Samsung 400/460 DX(n) and UX(n) series
- VESA 600-400
- Dimension from the wall: 70mm
- 15° tilting angle

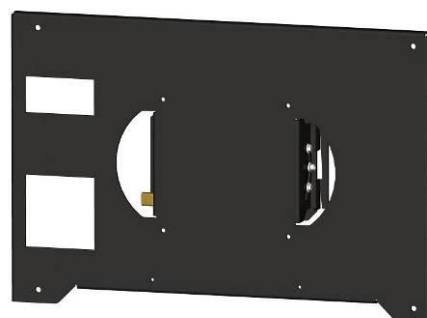


052.8070 (landscape version)

052.8075 (portrait version)


Tiltable VESA wall mount:

- Screen bracket specific for
Samsung 400/460 MX(n) and CX(n) series
- VESA 600-400
- Dimension from the wall: 70mm
- 15° tilting angle

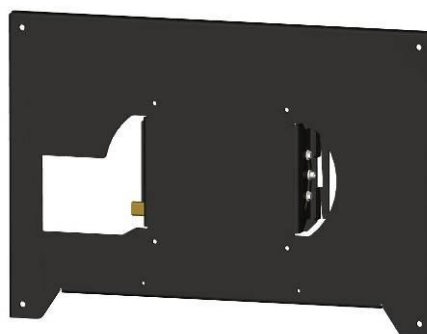

000.0001

Padlock for VESA & universal wall mounts



063.1035

Three-point coupling bolt (1x). Three coupling bolts are required to connect a screen mount to a stand.




All our universal flat screen wall mounts are VESA compatible. They can also be used for ceiling mounting in conjunction with a tube set, and for stand mounting using coupling bolts. The mounts are fitted with fastening material, to secure the screen to the bracket. An anti-theft padlock is available separately.

Fixed universal wall mounts

052.1000

Fixed universal wall mount:


- For 26–37" (depending on model)
- Dimensions: 525 x 430 x 33 mm (W x H x D)
- Max. dimension between suspension points: 432 x 400 mm (W x H)
- Dimension from the wall: 33mm

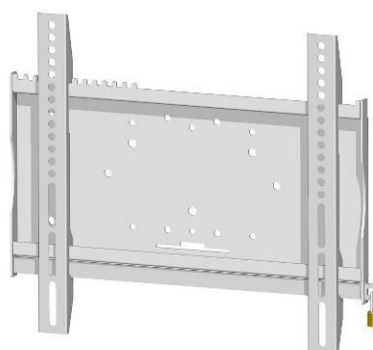

052.2000

Fixed universal wall mount:


- For 37"–50" (depending on model)
- Dimensions: 895 x 510 x 33 mm (W x H x D)
- Max. dimension between suspension points: 802 x 466 mm (W x H)
- Dimension from the wall: 33mm

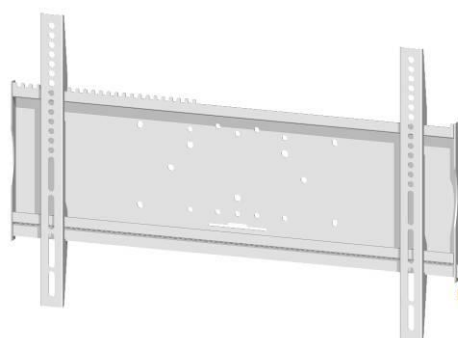

052.6000

Fixed universal wall mount:

- For 50"–65" (depending on model)
- Dimensions: 1190 x 630 x 38mm (W x H x D)
- Max. dimension between suspension points: 1100 x 600 mm (W x H)
- Dimension from the wall: 38mm

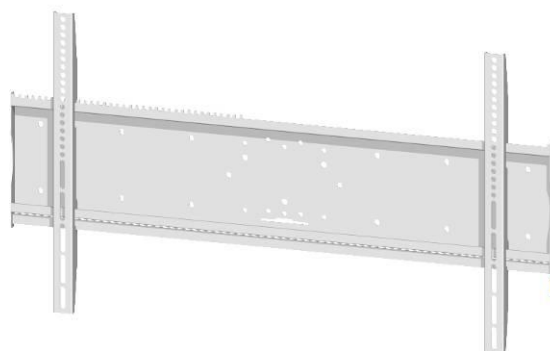

052.6004

Universal mounting bars, portrait:

For mounting large flat screens in portrait position.

- Combine with fixed universal bracket (052.1000, 052.2000, 052.6000)
- Max. height: 900 mm
- Max. width: depends on type of screen mount
- Length: 930 mm




Tiltable universal wall mounts

052.1050

Tiltable universal wall mount:


- For 26"–37" (depending on model)
- Dimensions: 525 x 430 x 75 mm (W x H x D)
- Max. dimension between suspension points: 432 x 400 mm (W x H)
- Dimension from the wall: 75 mm
- 13° tilting angle

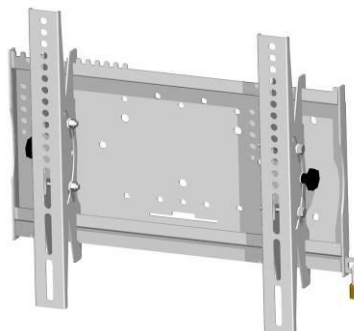

052.2050

Tiltable universal wall mounts:


- For 37"–50" (depending on model)
- Dimensions: 895 x 510 x 75 mm (W x H x D)
- Max. dimension between suspension points: 802 x 466 mm (W x H)
- Dimension from the wall: 75 mm
- 13° tilting angle

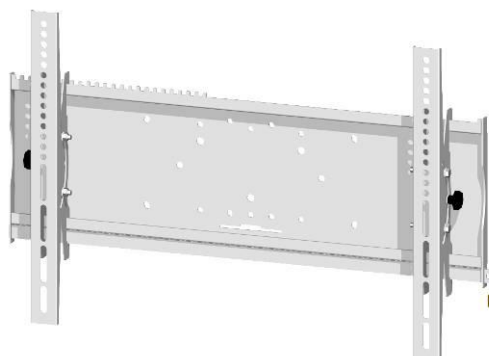

052.6050


Tiltable universal wall mounts:

- For 50"–65" (depending on model)
- Dimensions: 1190 x 630 x 87 mm (W x H x D)
- Max. dimension suspension points: 1100 x 600 mm (W x H)
- Dimension from the wall: 87 mm
- 13° tilting angle

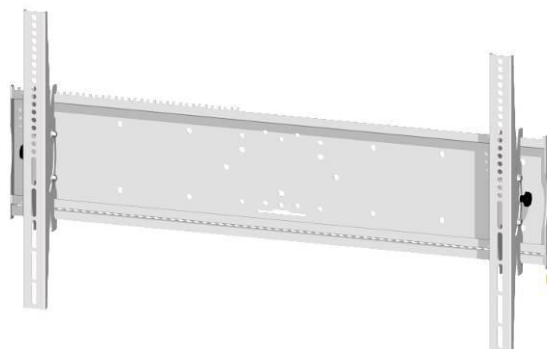

000.0001

Padlock for VESA & universal wall mounts



063.1035

Three-point coupling bolt (1x). Three coupling bolts are required to connect a screen mount to a stand.





All **SmartMetals®** VESA and universal screen mounts can be ceiling mounted using the tube sets below. It is possible to connect one or two screens (back-to-back) to the tube set. Following the installation, the screen can be turned to a horizontal position. The tube sets are available in three standard lengths, which can be shortened on location.

All tube sets are fitted with a:


- Cable duct
- Finishing ring for the ceiling set

An optional continuous angular adjustment is available, to mount a tube set to a sloped ceiling. As soon as the screen is installed, it can be protected against theft with a lock that should be ordered separately. Also available: optional H-bar mounts.

072.1010	<u>Tube set up to 1 metre</u>
072.1020	<u>Tube set up to 2 metres</u>
072.1030	<u>Tube set up to 3 metres</u>
072.1111	<u>Assembly set back-to-back</u>
003.1180	<u>Continuous angular adjustment</u>
072.2010	<u>H-bar mount, small</u>
072.2020	<u>H-bar mount, large</u>

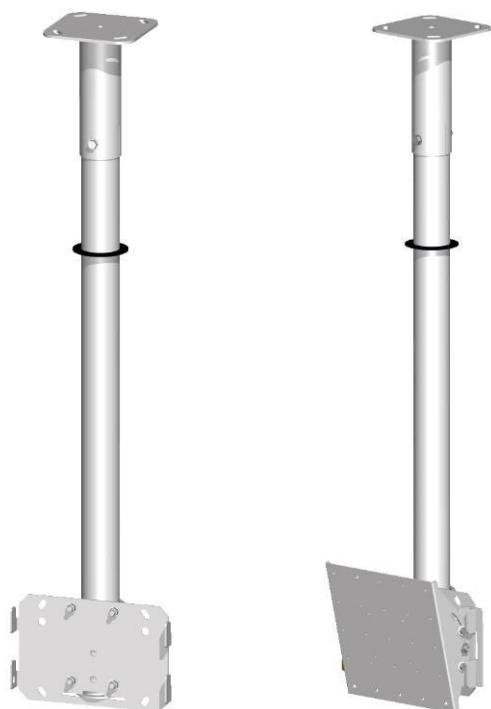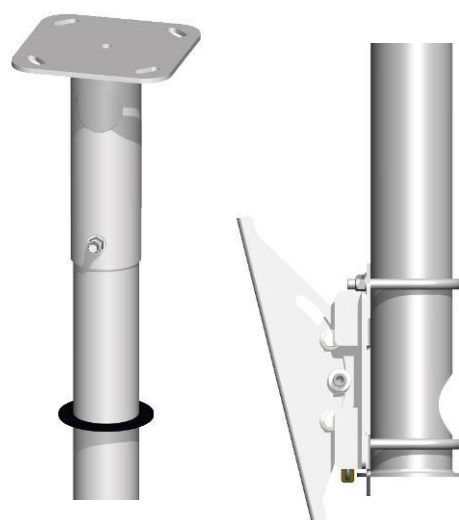

072.2010

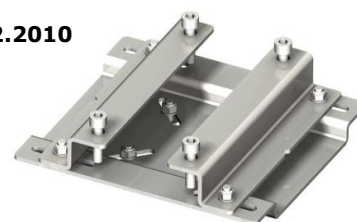

80-180mm


072.2020



160-270mm

Some characteristics:

- Suited for rental applications and fixed installation
- Slim and timeless design
- Functional design
- Anti-theft mechanism
- 3 unique integrated cable ducts
- No tools required when setting up
- Continuous height adjustment up to 190 cm
- Compatible with all SmartMetals® flat screen mounts
- Custom-made configurations possible

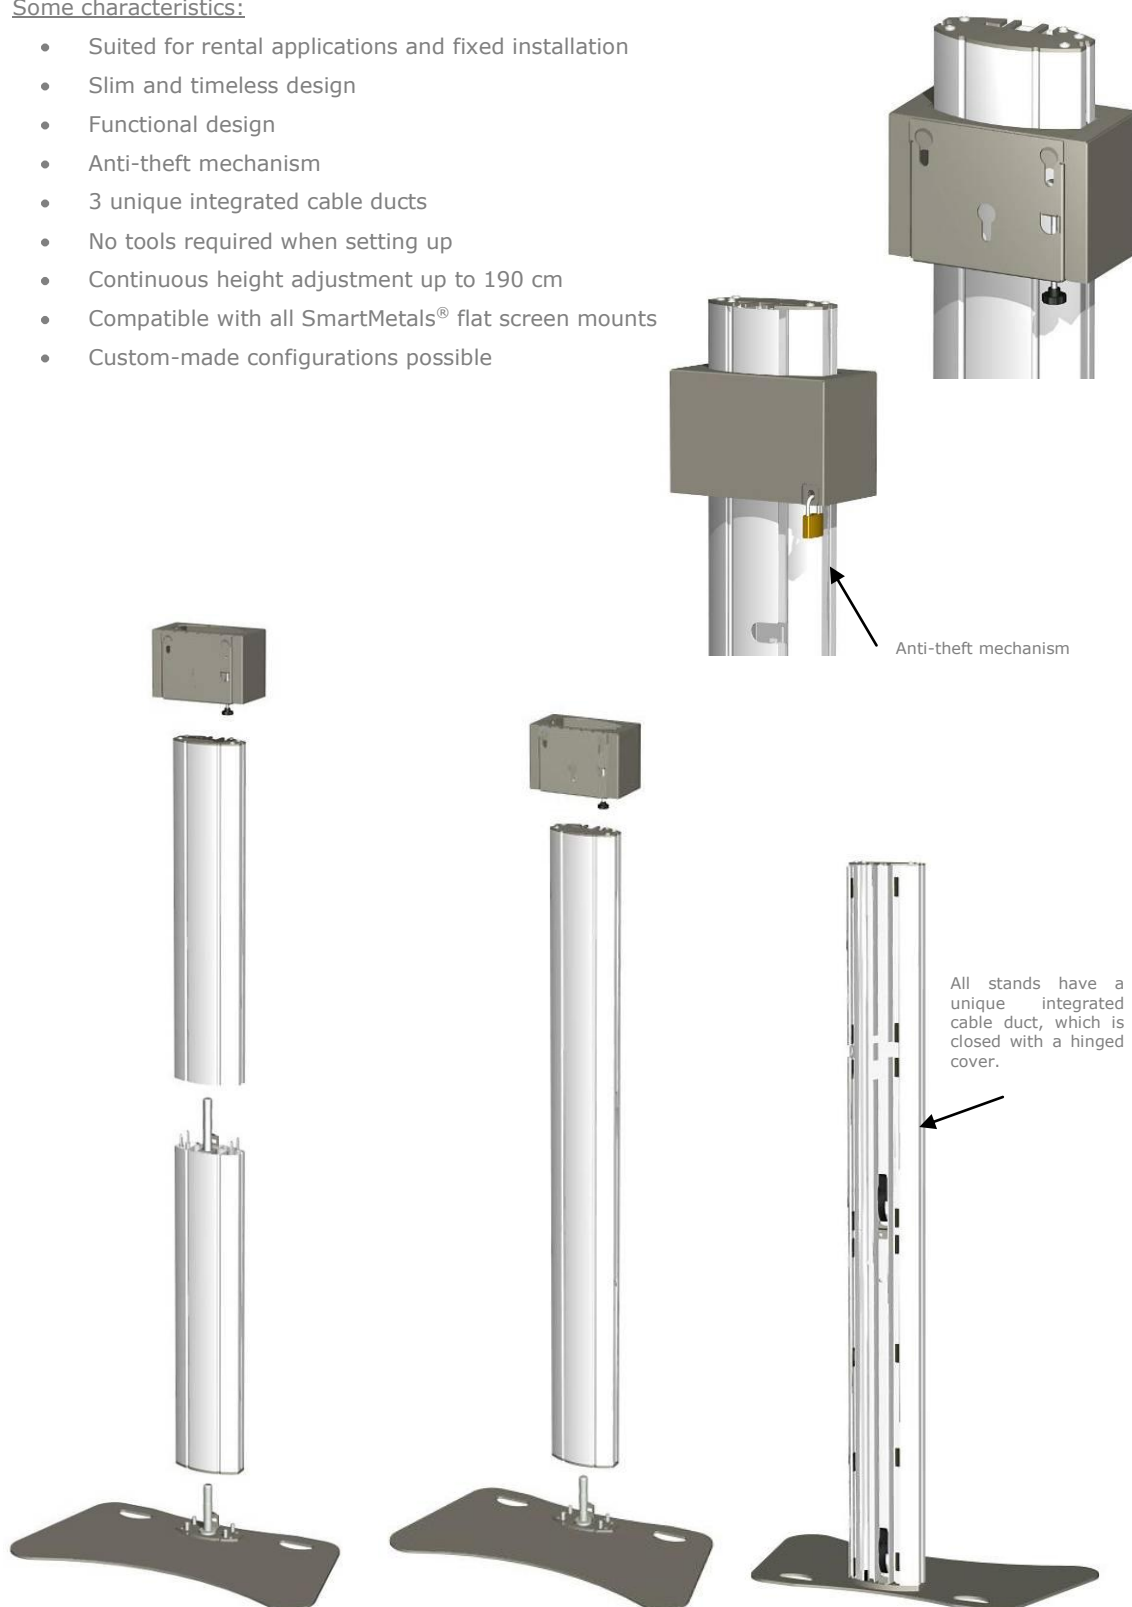

Fully divisible

The aluminium column consists of 2 parts; therefore very well suited for rental use.

Semi-divisible

The aluminium column consists of 1 part with a length of 1.9 meter.

Indivisible

Aluminium column and floor plate are merged as one.



062.1000B

Fully divisible stand

Single construction: for one screen up to 50". Comprises base plate, column, and single head.

062.1100B

Semi-divisible stand

Single construction: for one screen up to 50". Comprises base plate, column, and single head.

062.1200B

Indivisible stand

Single construction: for one screen up to 50". Comprises base plate, column, and single head.



062.2000B

Fully divisible stand

Double construction: for two screens up to 50". Comprises base plate, column, and double head.

062.2100B

Semi-divisible stand

Double construction: for two screens up to 50". Comprises base plate, column, and double head.

062.2200B

Indivisible stand

Double construction: for two screens up to 50". Comprises base plate, column, and double head.



062.3000B

Fully divisible stand

Single construction: for one screen up to 65". Comprises base plate, column and single head.

062.3100B

Semi-divisible stand

Single construction: for one screen up to 65". Comprises base plate, column and single head.

062.3200B

Indivisible stand

Single construction: for one screen up to 65". Comprises base plate, column and single head.



062.1500B

Fully divisible stand

Single construction: for one screen up to 50". Comprises wheeled base plate, column, and single head.

062.1600B

Semi-divisible stand.

Single construction: for one screen up to 50". Comprises wheeled base plate, column, and single head.

062.1700B

Indivisible stand

Single construction: for one screen up to 50". Comprises wheeled base plate, column, and single head.



062.2500B

Fully divisible stand

Double construction: for two screens up to 50". Comprises wheeled base plate, column, and double head.

062.2600B

Semi-divisible stand

Double construction: for two screens up to 50". Comprises wheeled base plate, column, and double head.

062.2700B

Indivisible stand

Double construction: for two screens up to 50". Comprises wheeled base plate, column, and double head.



062.3500B

Fully divisible stand

Single construction: for one screen up to 65". Comprises wheeled base plate, column, and single head.

062.3600B

Semi-divisible stand

Single construction: for one screen up to 65". Comprises wheeled base plate, column, and single head.

062.3700B

Indivisible stand

Single construction: for one screen up to 65". Comprises wheeled base plate, column, and single head.

Stand with electrical height adjustment

Sky-Lite now offers stands with electrical height adjustment, for screens up to 50" (60 kg) or 65" (90 kg). These come with any single construction base plate.

These stands are especially suited to educational establishments for use in combination with a touch screen as an alternative to an Interactive White Board. They are also ideal for offices in combination with a flat screen for presentations.

Some characteristics:

- Slim, functional design
- Continuous and silent height adjustment from 950–1600 mm (from base plate to centre of screen)
- Integrated drag chain running the cables from top column to the screen.
- Should be combined with **SmartMetals®** flat screen mounts (without coupling bolts)
- Possible accessories: *Stand platform (063.0100)* and *Lockable media housing (063.0700)*

Stand configurations – Electrical

062.4100* Stand with electrical height adjustment for screens up to 50 inch.

Max. strain: 60 kg

062.4600* Wheeled stand with electrical height adjustment for screens up to 50 inch.

Max. strain: 60 kg

* Combine with **SmartMetals®** flat screen mounts, page 19–22.




062.5100* Stand with electrical height adjustment for screens up to 65 inch.

Max. strain: 90 kg

062.5600* Wheeled stand with electrical height adjustment for screens up to 65 inch.

Max. strain: 90 kg

* Combine with **SmartMetals®** flat screen mounts, page 19–22.

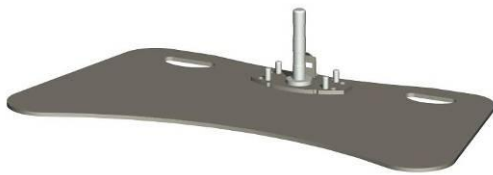

063.1010


Base plate

Single construction for mounting one screen up to 50".

063.3010

Base plate


Single construction for mounting one screen up to 65".

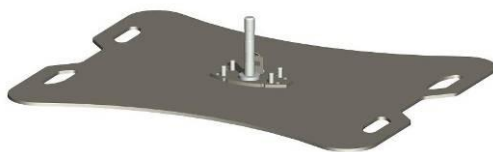

063.2010

Base plate

Double construction for mounting two screens (back-to-back) up to 50".

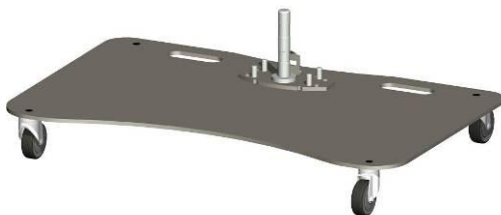

063.1510


Wheeled base plate

Single construction for mounting one screen up to 50".

063.3510

Wheeled base plate

Single construction for mounting one screen up to 65".

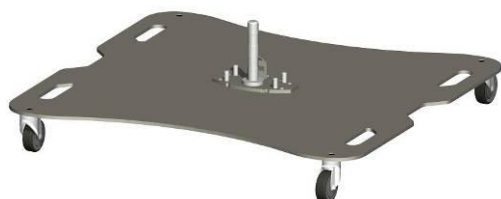

063.2510

Wheeled base plate


Double construction for mounting two screens (back-to-back) up to 50".



063.0200

Extension piece 35 cm.

Only for fully divisible stand. Insert between both stand parts to increase the height to 2.25 metres.



063.0100

Stand platform.

Dim. 39 x 31 cm (W x D). Continuously adjustable in height. Laptop lock can be attached.




063.0700

Lockable media housing.

For **SmartMetals®** flat screen stand. Protects your equipment against theft and vandalism.

- Solid steel housing
- Cable entries at the back
- Continuously height adjustment
- Inner dimensions (W x D x H):
450x377x114mm
- Lockable with an optional padlock
(**000.0011**)



000.0011

Padlock for several parts/accessories:

- A single stand head
- A double stand head
- Monitor/platform stand
- Media housing



063.1020B

Stand head, single construction.

For mounting a single screen. Padlock sold separately.



063.2020B

Stand head, double construction.

For mounting two screens (back-to-back). Padlock sold separately.



063.0500

Monitor/platform stand for mounting a flat screen just above the floor. Comprises a short column and specific head. To be combined with any **SmartMetals®** (wheeled) base plate and rental flat screen mount with coupling bolts.

Padlock sold separately (000.0011).



**052.5000**Universal rental mount.

This mount remains fixed to the screen and can be used in landscape or portrait. Maximum dimension of the suspension points on the screen: 828 x 466mm. Supplied with three coupling bolts. Padlock sold separately.

**063.0300**VESA 200 rental bracket.

This bracket remains fixed to the screen and can be used in landscape or portrait. Also compatible with VESA 75, 100, 100-200. Supplied with three coupling bolts.


**063.0310**VESA 300, 400 rental bracket.

This bracket remains fixed to the screen and can be used in landscape or portrait. Compatible with VESA 300, 400. Supplied with three coupling bolts.

**063.0320**VESA 600-400 rental bracket.

This bracket remains fixed to the screen and can be used in landscape or portrait. Compatible with VESA 600-400. Supplied with three coupling bolts.

063.0330VESA 800-400 rental bracket.



063.0450

Tilting wall or truss module.

Designed to take a 30 cm truss horizontally or vertically. Wall mountable. Padlock available separately.



063.0600

Hoist system

For one person to hoist flat screens (up to 90 kg) out of a TechnoCase flight case onto a **SmartMetals®** flat screen stand.



063.0611

Additional set hoist system: separate hoisting plate and roller-bar; For a flat screen that will be hoisted.



063.0615


Additional set hoist system: two separate mounting bars; For a flat screen stand that will be used for hoisting.



063.1035

Three-point coupling bolt (1x).

Three coupling bolts are required to connect a screen mount to the stand head.



000.0013

Padlock for locking the universal rental mount.