

TT 75/2 CF
Tripod
Manual



Safety Instructions

- ⇒ *Please read the manual before using the tripod.*
- ⇒ *Do not exceed the maximum specified payload (see specifications).*
- ⇒ *Check if the tripod has a safe standing before using it.*
- ⇒ *Always ensure that leg extension levers are clamped.*

General Information

The TT 75/2 CF is a lightweight 2-stage 75 mm tripod with 3-section single carbon fiber tubes. It offers a very wide height range, from as low as 10.6 (27 cm) up to a max setup height of 67.3 in. (171 cm). The tripod is easy to setup, the different leg angles can be quickly adjusted.

The tripod comes with footpads with retractable spikes.


The TT 75/2 CF only weights 5.3 lbs (2.4 kg) and is therefore an ideal choice when looking for lightweight, compact tripod systems.

Specifications:

- 75 mm bowl
- payload max 44 lbs
- height 10.6 in - 67.3 in
- transport length 28.9 in
- leg angles adjustment 23°, 50°, 70°
- weight: 5.3 lbs (2.4 kg)

We reserve the right to make changes based on technical advances.

Operating Elements

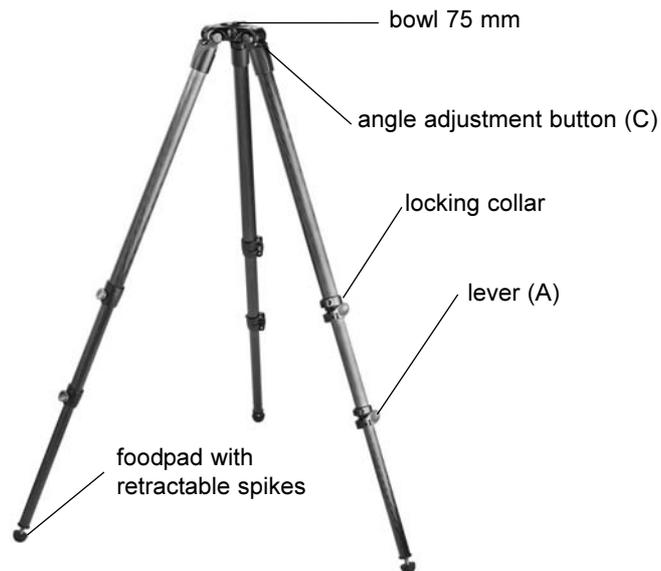


Set Up

Tripod Legs

Open the tripod legs. Each leg has telescopic extensions that can be released by opening lever (A). When the required tripod height is achieved, lock lever (A).

Feet

The tripod has footpads with retractable spikes.




Leg Angle Adjustment

Each leg can be set at 3 spread angles (X, Y, Z).

To change the angle on a leg, close the leg towards the centre slightly, press button "C" to select the new leg angle, then open the leg.

The angle of each leg can be adjusted independently of the other two legs.

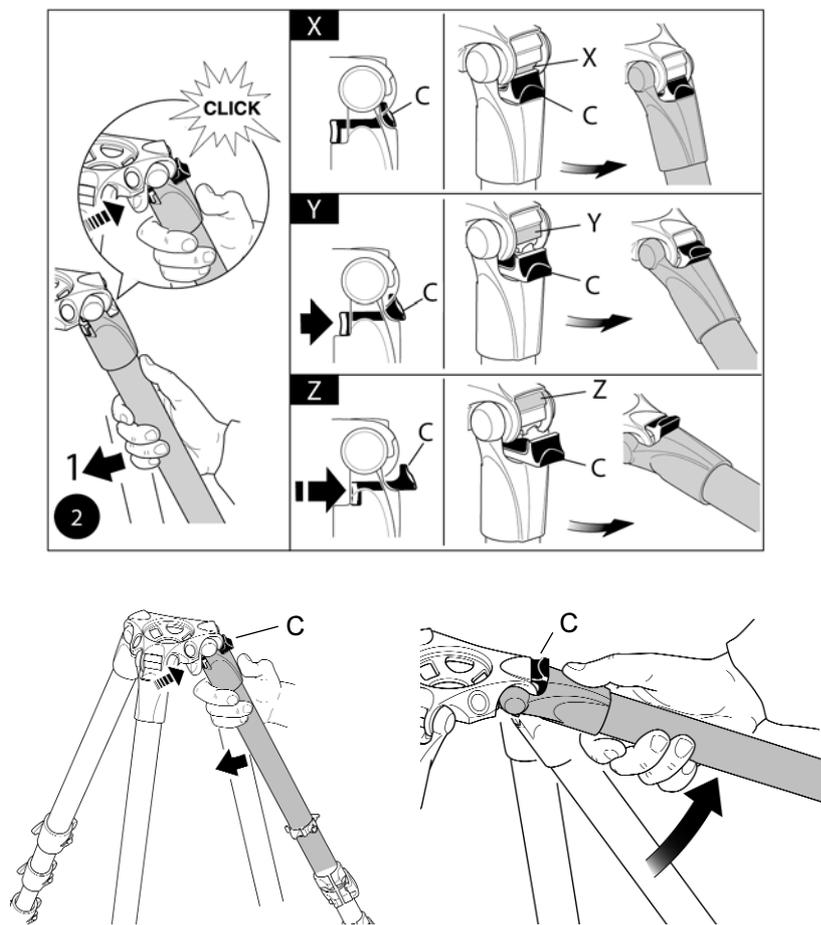


Leg Lock Tension Adjustment

If the leg extensions slip even after tightened the lever (A), the locking tension will need to be adjusted.

In order to do this:

- remove cap "K"
- release lever "A"
- turn screw "V" clockwise using the special key provided on one of the tripod legs.

Usually a third turn will be sufficient to achieve the correct locking tension.

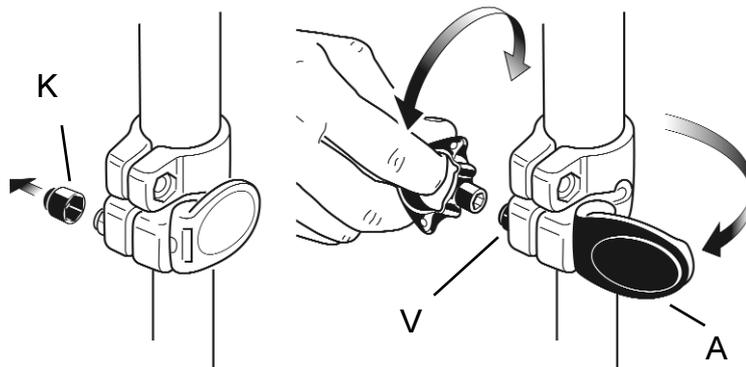

Warranty

The warranty expires if the tripod was operated improperly or not in line with the specifications.

Please register at www.sachtler.com/us for an extended warranty period.

© by **sachtler**® / All rights reserved

Version: 1.2/05/12

Issue date: 05/12

Vitec Videocom Inc.
709 Executive Blvd.
Valley Cottage
NY 10989
USA
Tel: +1 845 268 0100
Fax +1 845 268 0113
e-mail: info-cd-usa@vitecgroup.com

Vitec Videocom Inc
(West Coast Office)
2701 N. Ontario St.
Burbank
CA 91504
USA
Tel: +1 818 847 8666
Fax +1 818 847 1205
e-mail: info-cd-usa@vitecgroup.com

www.sachtler.com/us