



HD Video Conferencing

Product Guide



HuddleCamHD

www.HuddleCamHD.com



USB
VIDEO CONFERENCING

Compatibility


- Windows 7 & 8
 - Mac OS X
 - Adobe Connect
 - BlueJeans
 - Cisco Jabber
 - Cisco WebEx*
 - Easy Meeting
 - Facetime
 - Fuzebox
 - Google Hangout
 - GoToMeeting
 - Lifesize
 - Microsoft Lync
 - Polycom RealPresence
 - Radvision
 - Spontania
 - Skype
 - TurboMeeting.US
 - Vidy
 - Vsee
 - Zoom.US
- *Does not support image filp.

Features

- 3X Optical Zoom
- USB 2.0
- RS-232
- 1920 x 1080
- 81° Field of View
- Up to 30fps
- 64 Presets
- IR Remote

HuddleCamHD

The HuddleCamHD 3X is ideal for a small to medium sized meeting rooms. This camera is compatible with every system that accepts USB cameras.

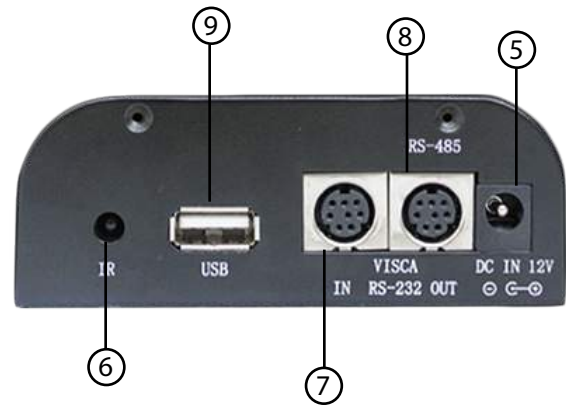

1. **Lens**
3x Optical Zoom.
2. **IR Receiver**
To receive IR remote controller signal.
3. **Power LED**
Blue LED blinks when unit is powered, Orange LED blinks for Stand-By status.

4. **IR Receiver**
To receive IR remote controller signal.
5. **DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.
6. **IR Receiver**
To receive IR remote controller signals.
7. **VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
8. **VISCA Out Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
9. **USB 2.0 Interface**
For connection to PC (USB 2.0 port. Will also function in a USB 3.0 port as USB 2.0 device).



Specifications

Camera & Lens	
Video CMOS Sensor	1/3" CMOS, 2.1 Mega Pixel
Frame Rate	30fps 1920 x 1080p
Lens Zoom	3X Optical Zoom f=5 -50mm F2.0-2.8
Field of View	36° ~81°
Warranty	2 Years

What's in the Box

- 3X Zoom USB 2.0 Camera
- 12V/2.0A DC Power Adapter
- Mounts: (1) Tripod Mount
- USB 2.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
- IR Remote Control
- User Manual (Downloadable)

HuddleCamHD

Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 3X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 90° Field of View
- Up to 30fps
- 64 Presets
- IR Remote
- Certified SONY Lens

The HuddleCamHD 3X Wide is ideal for a small to medium sized meeting rooms. Comes standard with certified SONY lens



- Lens**
3x Optical Zoom.
- IR Receiver**
To receive IR remote controller signal.
- Power LED**
Blue LED blinks when unit is powered,
- Standby LED**
Orange LED blinks for Stand-By status.
- LCD Display**
Information display for camera/firmware.
- USB 3.0 Interface**
For connection to PC USB 3.0 port (also compatible with USB 2.0 port and driver).
- IR Selective Switch**
When using only one remote to control more than one camera, this switch will assign a unique ID to each camera .
- VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- VISCA OUT Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.



Specifications

Camera & Lens	
Video CMOS Sensor	1/2.8" CMOS, 2.0 Mega Pixel
Frame Rate	30fps 1920 x 1080p, 60fps 1280 x 720p
Lens Zoom	3X Optical Zoom 12X Digital Zoom f=3 9mm
Field of View	23°~90°
Min Lux	1.0 at F 1.2

What's in the Box
3X Zoom USB 3.0 Camera
12V/2.0A DC Power Adapter
(1) Ceiling Mount and Hardware
USB 3.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control
User Manual (Downloadable online)

Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US
- Any UAC compatible software

Features

- 2.4 GHz Wireless
- Echo Cancellation
- 360° pickup
- Full Duplex
- Neoprene Travel Case
- Noise Cancellation
- Easy to Use
- Auto Level Control

The HuddlePod Air is the ideal wireless speakerphone with an easy & reliable USB 2.0 connection.



What's in the Box

- HuddlePod Air Speakerphone
- Wireless Receiver
- Neoprene Travel Case
- User Manual
- USB 2.0 Cable

- Power LEDs**
Blue power on
- Speaker LED**
Solid Blue: Mute
Blinking Blue: Max Volume
- Volume Mute**
Mute speakerphone volume
- Power**
Turn speakerphone on/off

- Volume Up/Down**
Control's speaker volume.
- Mute Microphone**
Mutes microphones
- Mic LED**
Blue: Muted
Blinking Orange: Low Battery
Solid Orange: Full Charge
- USB 2.0 Plug**
For power and charging

- Wireless Receiver Cap**
Protects USB connection for portability
- Wireless Receiver Antenna**
Removable & adjustable
- Durable wireless receiver**
In protective plastic case

Specifications

Microphone Features

Echo Cancellation	256 channel echo cancellation
Audio Output	Max 18dB w/ auto level control
Noise Cancellation	Intelligent NC up to 16dB
Digital EQ	Built-in Digital EQ for stable audio
Battery Life	7 Hours
Interface	USB 2.0 & 3.5mm Audio Out
Warranty	3 Years
Accessories	Optional wireless extender

Wireless Speakerphone Specifications

Weight: 0.8 lbs
Size: 7" Diameter, 1.5" Height
Working environment: Temp 0~40°C, Humidity 20%~85%
Compatibility: MS WIN7/8, Mac 10.5+, ChromeOS, Android 4.4+
USB Cable Supplied for power + charging only
RF frequency range: 2.400 GHz~2.4835 GHz
Certifications: CE Mark (R & TTE Directive)


Compatibility

- HuddleCam 3X
- HuddleCam 10X-720
- HuddleCam 10X
- All PTZOptics Cameras
- Most small based SONY, Panasonic, Cisco, Polycom and Vaddio camera with a 1/4-20 mounting hole.

Features

- Mounts directly to drywall, wood, masonry, or 2-gang US wall box with supplied wall anchors
- Mounting holes positioned in 4 post pattern
- Black powder coat paint provides long lasting finish
- Mounting hardware included
- 2 Year Warranty
- Made in USA

HuddleCamHD

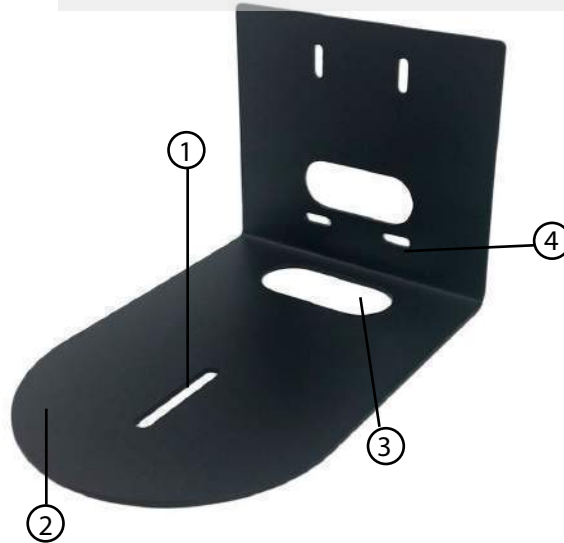

This Universal Thin Profile Wall Mount was designed specifically for an ideal way to wall mount a camera above or below a plasma or thin profile monitor. Constructed from heavy gauge steel, this mount comes with 2 year manufacture warranty.



- 1. Slot for 1/4-20**
Secures camera to mount.
- 2. Mount Base**
5-11/16" universal metal camera tray.
- 3. Cable Access**
Convenient cable access under mount and through wall.
- 4. Mounting Holes**
Precut mounting holes in four post pattern



Specifications

Size & Weight

Dimensions:	
Inches	5-11/16" W x 9-5/8" D x 5-1/8" H
Milimeters	144.5mm W x 209.6mm D x 130.2mm H
Weight	
Lbs	2.0 lbs
Kg	0.9 kg

What's in the Box

Camera Mount	
Mounting Hardware:	
	(4) Mounting Screws & Washers
	(4) Drywall/Masonry Anchors
	(1) Quarter Twenty bolt
	(4) Device mounting screws for 2-Gang Box

Compatibility


- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radvision
- Spontania
- Skype
- TurboMeeting.US
- Vidy
- Vsee
- Zoom.US

Features

- 10X Optical Zoom
- USB 2.0
- RS-232
- 1280 x 720p
- 57° Field of View
- Up to 30fps
- 64 Presets
- IR Remote

HuddleCamHD

The HuddleCamHD 10X 720p is ideal for a small to medium sized meeting rooms. This camera is compatible with every system that accepts USB cameras.

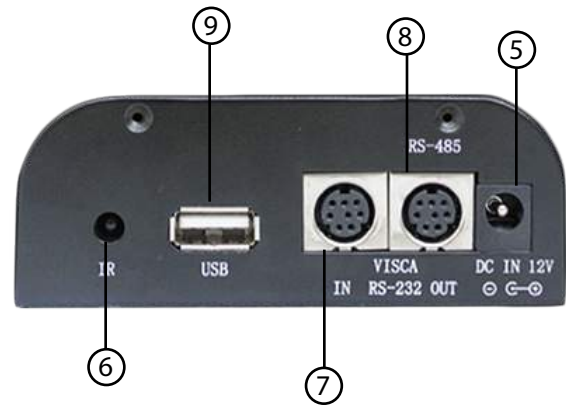

- 1. Lens**
10x Optical Zoom.
- 2. IR Receiver**
To receive IR remote controller signal.
- 3. Power LED**
Blue LED blinks when unit is powered, Orange LED blinks for Stand-By status.

- 4. IR Receiver**
To receive IR remote controller signal.
- 5. DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.
- 6. IR Receiver**
To receive IR remote controller signals.
- 7. VISA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- 8. VISA Out Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- 9. USB 2.0 Interface**
For connection to PC (USB 2.0 port. Will also function in a USB 3.0 port as USB 2.0 device).




Specifications

Camera & Lens	
Video CMOS Sensor	1/3" CMOS, 2.1 Mega Pixel
Frame Rate	30fps 1280 x 720
Lens Zoom	10X Optical Zoom f=5 -50mm F2.0-2.8
Field of View	7°~57°
Warranty	2 Years

What's in the Box
10X Zoom USB 2.0 Camera
12V/2.0A DC Power Adapter
Mounts: (1) Tripod Mount
USB 2.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control w/ batteries

Design your next
Conference Room
in minutes online!

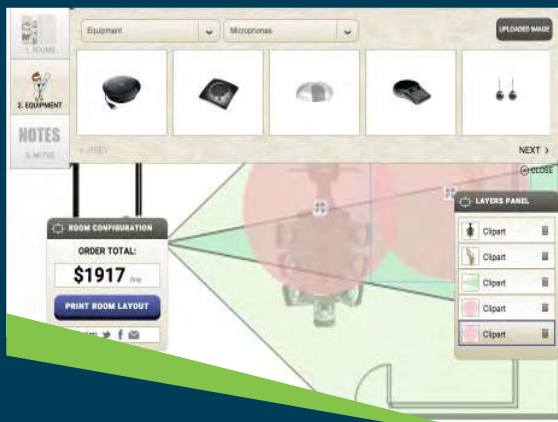

Free online tool

HuddleCam Designer

The HuddleCam Designer tool makes designing your next video conferencing room a breeze! Available 24/7 online with any web browser, try our web based room design tool online at:

<http://Designer.HuddleCamHD.com>

GET IT FOR
ANDROID



Return on Investment

Return on investment is what really counts! Talk to your AV distributor or vendor about ROI calculation once you have the cost of your next video conferencing system quoted. Understanding the ROI is a huge business driver for video conferencing technology.



Compatibility


- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 10X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 51° Field of View
- Up to 30fps
- 64 Presets
- IR Remote

HuddleCamHD

The HuddleCamHD 10X is ideal for a small to medium sized meeting rooms. This USB 3.0 provides faster speeds than USB 2.0 for an exceptional image.

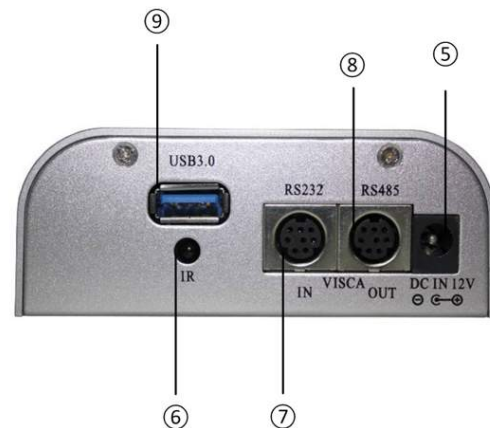

- 1. Lens**
10x Optical Zoom.
- 2. IR Receiver**
To receive IR remote controller signal.
- 3. Power LED**
Blue LED blinks when unit is powered, Orange LED blinks for Stand-By status.

- 4. IR Receiver**
To receive IR remote controller signal.
- 5. DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.
- 6. IR Receiver**
To receive IR remote controller signals.
- 7. VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- 8. VISCA Out Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- 9. USB 3.0 Interface**
For connection to PC USB 3.0 port. Also compatible with USB 2.0 port and driver.

Specifications

Camera & Lens	
Video CMOS Sensor	1/3" CMOS, 2.1 Mega Pixel
Frame Rate	30fps 1920 x 1080p
Lens Zoom	10X Optical Zoom f=5 -50mm F2.0-2.8
Field of View	7°~51°
Warranty	2 Years

What's in the Box
10X Zoom USB 3.0 Camera
12V/2.0A DC Power Adapter
Mounts: (1) Tripod Mount
USB 3.0 Data Cable (9ft), Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control
User Manual (Downloadable)



Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidy
- Vsee
- Zoom.US

Features

- 12X Optical Zoom
- USB 3.0 & DVI-I
- RS-232
- 1920 x 1080
- 71° Field of View
- Up to 60fps
- 64 Presets
- IR Remote
- Wide Dynamic Range



HuddleCamHD

The HuddleCamHD 12X is ideal for medium to large sized meeting rooms and offers USB 3.0 and DVI outputs.



Specifications

Camera & Lens

Video CMOS Sensor	1/2.8" CMOS 2.0 Mega Pixel Sensor
Video Signal	1080p 60/50/30/25 1080i 60/50 720p 60/50/30/25
Lens Zoom	12X Optical Zoom f=3.9 - 46.8mm
Field of View	7°~71°
Min Illumination	1.0 at F1.2
White Balance	Auto/Manual

Pan/Tilt Movement

Pan Movement	±170°
Tilt Rotation	- 30°, -90°
Presets	64 Presets, 4 Patrol lines

Electrical Index

Power Supply Adapter	12V DC 2A
Input Voltage	12V DC (10.5-14V DC)
Input Power	24W (Max)

What's in the Box

- 12X Zoom USB 3.0 Camera
- 12V DC 2.5A Power Adapter
- DVi-HDMI Adaptor
- USB 3.0 A-B Cable (6ft), RS-232 Cable
- IR Remote Control
- User Manual

Rear Board Connectors

High Definition Interface	USB 3.0 & DVI-I
Controller Signal Interface	Mini DIN-8 (VISCA IN, VISCA OUT/RS485)
Controller Signal Config.	IDip-Switch Pin 7/TTL Signal
Baud Rate	9600 bds
Power Supply Interface	DC 12V 2A

Physical

Material	Aluminum, Plastic
Dimensions (W x H x D)	10.44" x 6.75" x 5.81" (265.17mm x 171.45mm x 147.57mm)
Weight	3.32 lbs (1.15 kg)
Temperature	32°F to + 113°F
Power Supply	-14°F to 140°F
Color	Silver Gray

Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 20X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 58° Field of View
- Up to 30fps
- 64 Presets
- IR Remote
- Certified SONY Lens

HuddleCamHD

The HuddleCamHD 20X Gen 2 is ideal for a medium to large sized meeting rooms. Comes standard with certified SONY lens



- Lens**
20x Optical Zoom.
- IR Receiver**
To receive IR remote controller signal.
- Power LED**
Blue LED blinks when unit is powered,
- Standby LED**
Orange LED blinks for Stand-By status. Blue LED for Working status.
- LCD Display**
Information display for camera/firmware.
- USB 3.0 Interface**
For connection to PC USB 3.0 port (also compatible with USB 2.0 port and driver).
- IR Selective Switch**
When using only one remote to control more than one camera, this switch will assign a unique ID to each camera .
- VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- VISCA OUT Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.



Specifications

Camera & Lens

Video CMOS Sensor	1/2.8" CMOS 3.27 Mega Pixel
Frame Rate	30fps 1920 x 1080p, 60fps 1280 x 720p
Lens Zoom	20X Optical Zoom, 12X Digital Zoom f=4.7-90mm
Field of View	5°~58°
Min Lux	0.1 Lux
White Balance	Auto/Sunlight/Shade/Fluorescence White Balance

What's in the Box

20X Zoom USB 3.0 Camera
12V/2.0A DC Power Adapter
Ceiling Mount and Hardware included
USB 3.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
IR Remote Control
User Manual (Downloadable online)

Compatibility


- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 30X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 63° Field of View
- Up to 30fps
- 64 Presets
- IR Remote
- Certified SONY Lens

HuddleCamHD

The HuddleCamHD 30X is ideal for a large to auditorium sized meeting rooms. Comes standard with certified SONY lens.

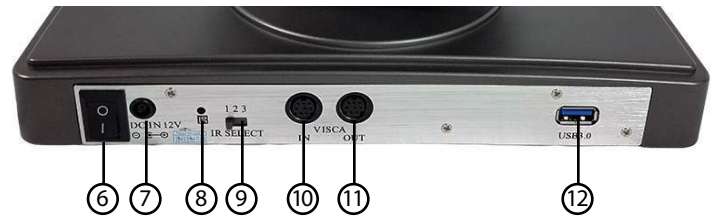

- 1. Lens**
30x Optical Zoom.
- 2. IR Receiver**
To receive IR remote controller signal.
- 3. Power LED**
Blue LED blinks when unit is powered,
- 4. Standby LED**
Orange LED blinks for Stand-By status. Blue LED for Working status.

- 5. IR Receiver**
To receive IR remote controller signals.
- 6. Power Switch**
Power On/Off button.
- DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.
- IR Receiver**
To receive IR remote controller signals.

- 9. IR Selective Switch**
When using only one remote to control more than one camera, this switch will assign a unique ID to each camera .
- 10. VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- 11. VISCA OUT Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- 12. USB 3.0 Interface**
For connection to PC USB 3.0 port (also compatible with USB 2.0 port and driver).



Specifications

Camera & Lens	
Video CMOS Sensor	1/2.8" CMOS 3.27 Mega Pixel
Frame Rate	30fps 1920 x 1080p, 60fps 1280 x 720p
Lens Zoom	30X Optical Zoom, 12X Digital Zoom f=4.6-138.3
Field of View	3°~63°
Min Lux	1.4 Lux
White Balance	Auto/Sunlight/Shade/Fluorescence White Balance

What's in the Box

- 30X Zoom USB 3.0 Camera
- 12V/2.0A DC Power Adapter
- Installation Bracket & Screw
- USB 3.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable
- IR Remote Control
- User Manual



Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 12X Optical Zoom
- USB 3.0
- RS-232 & RS-485
- 1920 x 1080
- 72.5° Field of View
- Up to 60fps
- 128 Presets
- IR Remote
- Wireless Receiver

The HuddleCam Air is ideal for medium to large sized meeting rooms providing a clean & easy installation.



Specifications

Camera & Lens

Video CMOS Sensor	1/2.7" CMOS 2.07 Mega Pixel Sensor
Video Signal	1080p 30/25 1080i 60/50 720p 60/50
Lens Zoom	12X Optical Zoom, 16X Digital
Olympus Lens	f=3.5 ~ 42.3mm, f=1.8 ~ 2.8mm
Field of View	6.9° ~ 72.5° (Horizontal) 3.9° ~ 44.8° (Vertical)
Scanning mode	Progressive
Shutter Speed	1/25s ~ 1/10,000s
Min Illumination	0.5 Lux at F1.8 (AGC On)
White Balance	Auto, Indoor, Outdoor, One-Push, Manual
Backlight	Backlight compensation supported
Digital Noise	2D & 3D Digital Noise Reduction
Video S/N	≥55dB
Number of Presets	128
Preset Accuracy	0.1°

Wireless Transmission Specifications

Range	80 feet open space (Clear line of sight)
Wireless Frequencies	5.15-5.25, 5.25-5.35, 5.47-5.72, 5.72-5.8 (GHz)
Frequency Stability	± 10 PPM
Bandwidth	20 / 40 MHz
Receiving Sensitivity	≤ - 75 dBm
Transmission Power	13 ± 2dBm
Antenna(s)	Internal

Camera Interface & Dimensions

Network Interface	1X RJ45: 10M/100M Ethernet Port
Communication In/Out	1X RS-232 IN: 8pin Min-DIN, Max 30m 1X RS-485: 2pin port, Max 1500m
Control Protocols	VISCA/Pelco-D/Pelco-P
Power Supply Interface	JEITA type (DC IN 12V)
Camera Size	9.4" x 5.5" x 6.2"
Camera Weight	5.5 lbs




Compatibility

- HuddleCam Air
- HuddleCam 12X
- Most large based SONY, Panasonic, Cisco, Polycom and Vaddio camera with a 1/4-20 mounting hole.

Features

- Mounts directly to drywall, wood, masonry, or 2-gang US wall box with supplied wall anchors
- Mounting holes positioned in 4 post pattern
- Black powder coat paint provides long lasting finish
- Mounting hardware included
- 3 Year Warranty
- Made in USA

HuddleCamHD

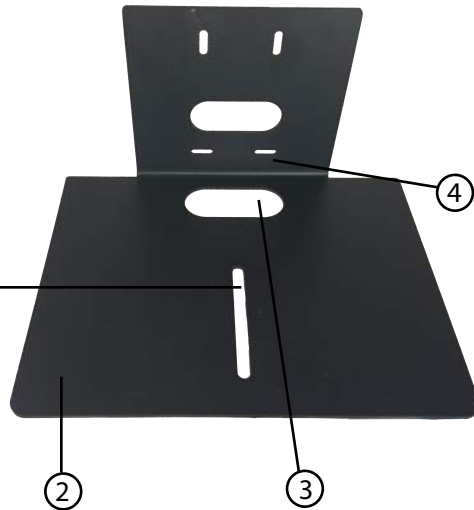

- 1. Slot for 1/4-20**
Secures camera to mount.
- 2. Mount Base**
9 13/16" wide universal metal camera tray.
- 3. Cable Access**
Convenient cable access under mount and through wall.
- 4. Mounting Holes**
Precut mounting holes in four post pattern

This Universal Thin Profile Wall Mount was designed specifically for an ideal way to wall mount a camera above or below a plasma or thin profile monitor. Constructed from heavy gauge steel, this mount comes with 2 year manufacture warranty.



Specifications

Size & Weight

Dimensions:	
Inches	9-13/16" W x 7-13/16" D x 5-1/8" H
Milimeters	249.2mm W x 198.4mm D x 130.2mm H
Weight	
Lbs	2.8 lbs
Kg	1.27 kg

What's in the Box

Camera Mount	
Mounting Hardware:	
	(4) Mounting Screws & Washers
	(4) Drywall/Masonry Anchors
	(1) Quarter Twenty bolt
	(4) Device mounting screws for 2-Gang Box



No more messy cables... **GO Wireless**



1 WIRELESS CONFERENCE CAMERA
Why not go wireless with your camera? The HuddleCamHD Air provides a "latency-free" video conferencing connection over USB 3.0 to any new Mac or PC computer. With less than .01 second latency we are using the world's most advanced video processing chip sets to deliver a full package you can't find anywhere else!

We are proudly introducing the world's first pan tilt zoom conference camera that works with any USB 3.0 enabled computer.

2 COMPATIBILITY is the key to the HuddleCamHD Air's approach to the new "online" web video conferencing market. With best in class drivers that support the latest Mac and PC platforms, you can depend on rock solid 1080p or 720p support.

Before launch we have tested the HuddleCamHD Air with: Acano, Jabber, GoToMeeting, Skype, Lync, WebEX and Zoom.US.

[Check out the test footage here...](#)



*Patent Pending

3 **TECHNOLOGY OVERVIEW**

WIRELESS RANGE: 80 feet (25 meters)

OPTICAL ZOOM: 12x & 20x Models

WIRELESS FREQUENCY: 5 GHz

MAX RESOLUTION: 1920x1080p up to 60 fps

LATENCY: Near zero latency

CONTROL: IP, IR & RS-232 & RS-485

4 **INSPIRATION:** The inspiration for the HuddleCam Air came from Matthew Davis, lead engineer at Conference Room Systems. With over 12 years of Audio Visual industry expertise, Matthew realized the need for a high quality wireless conference camera.

Up against cabling challenges such as core holes, tripping hazards, and unreliable solutions, Davis tested the industries' best made wireless chip sets to create a product that would be "latency free". That is what you will find with the HuddleCam Air!

**HUDDLECAM AIR**



Our happy customers

UNIVERSITY OF TORONTO "I love this camera. My clients love this camera. The students love this camera. Therefore, I love the camera even more. We use this with Adobe Connect, Skype, and GoToMeeting. This camera is incredible. It's also incredibly slick and looks REALLY good setup in a classroom. The only problem is that everyone wants one now and keeps asking me where I bought it!" -**Brian De Silva, IT**

CLARION UNIVERSITY OF PENNSYLVANIA
"Very pleased with this unit and quality! It integrated seamlessly with our system and the operation and picture quality rivals even a \$4000 camera from another manufacturer. We will definitely be looking at more of this model

or it's relatives for future projects!" -**AV/Media Manager from Clarion, PA**

ARIZONA HOSPITAL "a joy to work with. They were patient with all my questions and Patrick helped me via chat (which I prefer) to narrow down my choice to two different cameras. We then set up a video conference to see the difference between the two. It was very helpful."
-**Rodney Baker**

Let us take you to the next level!

Paul Richards
Business Development, HuddleCamHD

let us
connect

HuddleCamHD

152 Robbins Rd

Downingtown, PA 19335

USA

Phone +1 800 486-5276

Fax +610-518-2201

E-mail sales@huddlecamed.com

www.HuddleCamHD.com



USB

VIDEO CONFERENCING